




SPY 52 ON HE 94020

19803 9420 FG

AVAILABLE IN
BLACK 19803 9420 B
FLEMISH BRONZE 19803 9420 FBR
FLEMISH GOLD 19803 9420 FG
FULL WHITE 19803 9420 FW
GOLD COLOURED 19803 9420 GC
WHITE 19803 9420 W

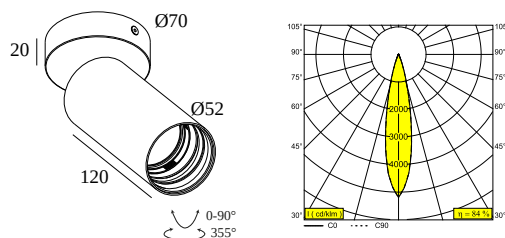

[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	LENS FL-20° EXCL.LED POWER SUPPLY 350mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	D
CERTIFICATES	LCA

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6W / CRI>90 (R9: 60) / 4000K / 975lm
TM-30 VALUES	rf: 96 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	975lm // 6W // 163lm/W
LED TECHNICS (LUMINAIRE)	790lm // 6,9W // 114lm/W

Remarks

High Efficacy : > 100lm/W

Requirements

SPY 52 TUBE
 LED POWER SUPPLY 350mA-DC DIM


Options

COVERSET R 90-100

For detailed installation instructions, please consult the manual : [19803_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Emergency units



21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B

☐

Cutout dimension (mm): 27

21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W

☐


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 90 91 LED POWER SUPPLY 350mA-DC / 15W

2(1)

☐

Dimtype: non-dimmable

Cutout dimension (mm): 40




300 90 110 LED POWER SUPPLY 350mA-DC / 10W DIM8

1

☐

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 42




300 90 116 LED POWER SUPPLY 350mA-DC / 18W DIM8

2->2

☐

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 55



21012 0515 LED POWER SUPPLY MULTI POWER DIM5

1(1)

☐

Dimtype: DALI

Cutout dimension (mm): 55



21012 0520 LED POWER SUPPLY 350mA-DC / 8W

1(0)


☐

Dimtype: non-dimmable


Cutout dimension (mm): 47

SPY 52 ON HE 94020

19803 9420 FG

	<u>21012 0575</u> LED POWER SUPPLY MULTI POWER DIM5	2->3(2) ☐
	Dimtype: DALI	
	Cutout dimension (mm): 55	

Finish your product

	<u>19810 0100 B</u> SPY 52 TUBE B	☐
	<u>19810 0100 FBR</u> SPY 52 TUBE FBR	☐
	<u>19810 0100 FG</u> SPY 52 TUBE FG	☐
	<u>19810 0100 GC</u> SPY 52 TUBE GC	☐
	<u>19810 0100 W</u> SPY 52 TUBE W	☐

Notes: