




LEDS C/GO

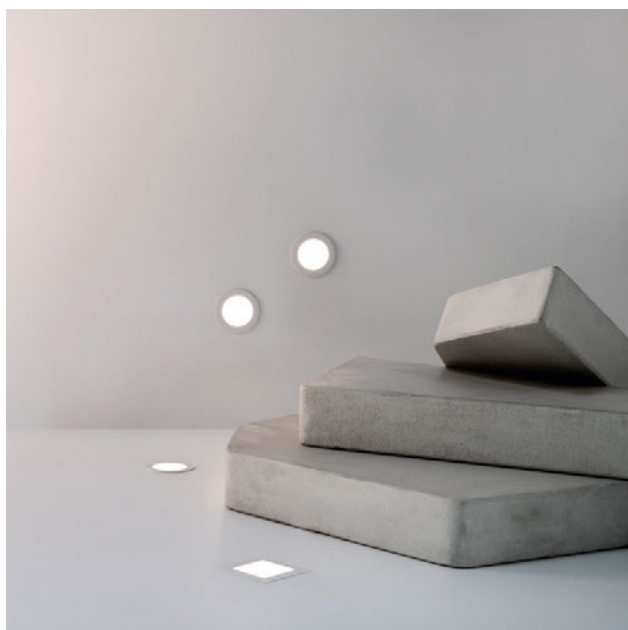

The ideal miniature marker fixtures for orientation and atmosphere lighting. With a square or round option to choose from, LEDS C R ST and LEDS GO are IP67 in anodized aluminium.

Specification	LEDS C ST	LEDS Go In Forte
Floor Cut-out:	1 ⁵ / ₈ "	1 ¹ / ₂ " x 1 ¹ / ₂ "
Adjustability:	Fixed	
Rating:	Wet	

Performance	
LED Maintenance:	L90>120,000hrs
McAdam Step:	3
CRI:	80
*SP:	1W

Delivered Lumens	2700K	3000K	4000K
LEDS Go In Forte:	36Lm	39Lm	42Lm
LEDS C ST:	35Lm	38Lm	41Lm

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: LDSSS-27WI-W-SPR-RMTD1-UNV

Luminaire	Size	Shape	CCT	Function	Finish	Power*	Installation	Application	Controls***
LEDS	M Mini	R Round (LEDS C ST) S Square (LEDS GO IN FORTE)	27 2700K 30 3000K 40 4000K	WFX Wall or Floor, Exterior Use	ANO Anodized	SP Standard Power	R Recessed CF ¹ Concrete Flange CL ¹ Concrete Trimless	RMT Remote Power Supply	D1-120 0-10V dim 120V D1-347 0-10V dim 347V D8-120 FE ELV dim 120V

¹ Only available with Shape S.
*** Contact factory for additional dimming options.


Related Products

Logic, Heli, Heli X





Finish Options


LEDS MINI ROUND (LEDS C ST)



LEDS MINI SQUARE (LEDS GO IN FORTE)



Accessories




Installation Options

REMOTE DRIVER (With Controls D8)

A: 8" x B: 2"-1/2" x C: 2"-1/2"
A: 203mm x B: 64mm x C: 64mm


- For Remote application
- ETL Listed
- Damp rated




REMOTE DRIVER (With Controls D1)

A: 8" x B: 2"-3/16" x C: 4"-1/4"
A: 203mm x B: 72mm x C: 108mm

- For Remote application
- ETL Listed
- Damp rated




CF - CONCRETE FLANGE



Only available with Shape S.

CL - CONCRETE TRIMLESS




Only available with Shape S.



Photometric Data

LEDS MINI ROUND

LEDS MINI SQUARE

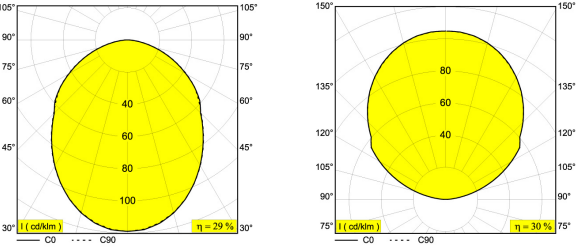

Driver Options

D1		
• Dimming Control • Dimming Range • Dim to off • Power Factor @ Full Load • Efficiency @ Full Load • THD @ Full Load • Title 24 Compliant	0-10V 1-100% - yes at 0.7mA >0.9 ≥87 <20%	Dimmer Compatibility • Leviton IP710-DLZ • Lutron DDTV-XX • WattStopper ADF-120277 • Synergy Lighting Controls ISD BC
D8		
• Dimming Control • Dimming Range • Dim to off • Power Factor @ Full Load • Efficiency @ Full Load • THD @ Full Load	- Phase Control 10-100% - no >0.9 ≥78 <12%	Dimmer Compatibility • Leviton IPE04-1LZ • Lutron DVELV-300P

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.