




SOLI - LINE 90 DOWN 930 Q-DIM

27156 930Q B

AVAILABLE IN
BLACK 27156 930Q B
WHITE 27156 930Q W

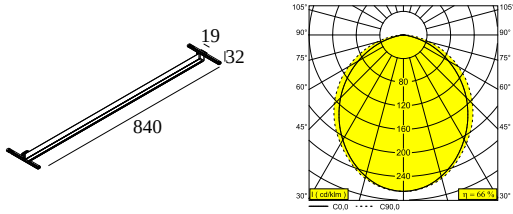

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	non adjustable
INFORMATION	EXCL.LED POWER SUPPLY 48V-DC
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	Qbus dim
ENERGY CLASS	E
CERTIFICATES	CB, ENEC
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED flex 18W / CRI>90 (R9: 60) / 3000K / 2240lm
SDCM	SDCM3
LM80	L70 > 30000
LED TECHNICS (LIGHT SOURCE)	2240lm // 18W // 124lm/W
LED TECHNICS (LUMINAIRE)	1485lm // 20,7W // 72lm/W
Requirements	
LED POWER SUPPLY 48V-DC	

For detailed installation instructions, please consult the manual : [27156_XXXQ_HAND.pdf](#)

SOLI - LINE 90 DOWN 930 Q-DIM

27156 930Q B

FINISH YOUR SPECIFICATION

LED power supplies		# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
 300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN	Dimtype: non-dimmable	4
 300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN	Dimtype: non-dimmable	11
 21012 0230 LED POWER SUPPLY 48V-DC / 100W	Dimtype: non-dimmable Cutout dimension (mm): 40	4
 21012 0240 LED POWER SUPPLY 48V-DC / 200W	Dimtype: non-dimmable Cutout dimension (mm): 40	9

COMPATIBLE COMPOSABLES

SOLISCAPE profile	Available Colours
 27111 0020 SOLI - PROFILE 2m	
 27111 0030 SOLI - PROFILE 3m	

Notes:

DELTALIGHT

SOLI - LINE 90 DOWN 930 Q-DIM

27156 930Q B