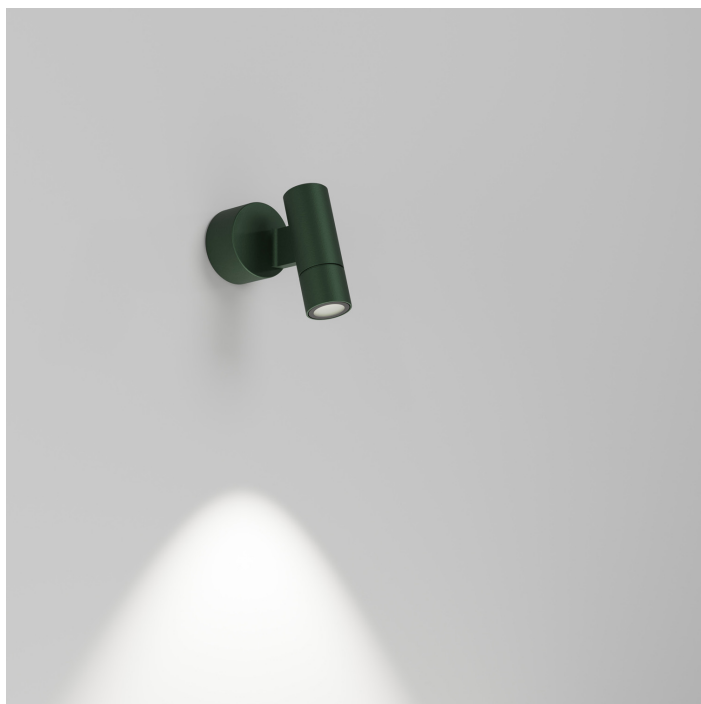






SPIX S 24V 92710

29714 9210 PGR

AVAILABLE IN
ANTHRACITE 29714 9210 N
PINE GREEN 29714 9210 PGR









[View on website](#)



General info	
LOCATION	outdoor
INSTALLATION	Floor Surface mounted, Wall Surface mounted
INGRESS PROTECTION	IP65
PROTECTION AGAINST MECHANICAL IMPACT	IK05
WEIGHT (KG)	0.3
ADJUSTABILITY	90° swiveling, 360° rotatable
INFORMATION	LENS 10° EXCLLED POWER SUPPLY 24V-DC (non-dimmable or dimmable with PWM output)
Electrical info	
ELECTRICAL	24V-DC
CLASS	III
ENERGY CLASS	F
CERTIFICATES	CB, ENEC
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 2,6W / CRI>90 (R9: 55) / 2700K / 270lm
TM-30 VALUES	rf: 91 / Rg: 100
SDCM	SDCM3
RISKGROUP	RG2
LM80	L90B10 > 150000
BEAMANGLE	10°
LED TECHNICS (LIGHT SOURCE)	270lm // 2,6W // 103lm/W
LED TECHNICS (LUMINAIRE)	212lm // 3W // 71lm/W
Requirements	
LED POWER SUPPLY 24V-DC	

For detailed installation instructions, please consult the manual : [29714_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

LED power supplies		# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
 300 89 24 150 LED POWER SUPPLY 24V-DC / 150W	Dimtype: non-dimmable Cutout dimension (mm): 75	48
 21012 0160 LED POWER SUPPLY 24V-DC / 24W	Dimtype: non-dimmable Cutout dimension (mm): 55	7
 21012 0171 LED POWER SUPPLY 24V-DC / 60W DIM1	Dimtype: 1-10V Cutout dimension (mm): 61	19
 21012 0181 LED POWER SUPPLY 24V-DC / 90W DIM1	Dimtype: 1-10V Cutout dimension (mm): 70	28
 21012 0191 LED POWER SUPPLY 24V-DC / 120W DIM1	Dimtype: 1-10V Cutout dimension (mm): 70	38
 21032 0320 AMBIENT LIGHT SENSOR AND 24V DIMMER (PWM)		

Notes:

DELTALIGHT

SPIX S 24V 92710

29714 9210 PGR