




SPY 52 CLIP TW 96545

19822 9030 W-W

AVAILABLE IN
BLACK-BLACK 19822 9030 B-B
FULL WHITE 19822 9030 FW
WHITE-WHITE 19822 9030 W-W

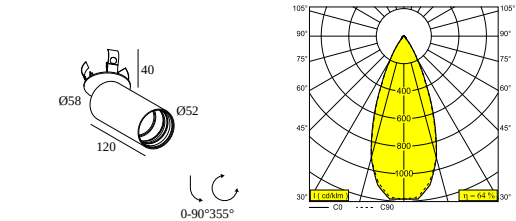

 [View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Semi-recessed
CUTOUT SHAPE/SIZE (MM)	round - 51
RECESSED DEPTH (MM)	40
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	REFLECTOR WFL-45° EXCLLED POWER SUPPLY 500mA-DC TW - (DALI DT8) Optional REFLECTORS 20° & 30° available

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, LCA

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 9W / CRI>90 (R9: 50) / 2700K-6500K / 1087lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	45°
LED TECHNICS (LIGHT SOURCE)	1087lm // 9W // 121lm/W
LED TECHNICS (LUMINAIRE)	695lm // 10,4W // 67lm/W

Requirements

SPY 52 TUBE
LED POWER SUPPLY 500mA-DC TW

Options

MOUNTING KIT FLUSH SPY

Accessories

HONEYCOMB 42
SPREAD LENS 42
LINEAR SPREAD LENS 42
SOFTENING LENS 42
GLASS SBL 42

For detailed installation instructions, please consult the manual : [19822_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
 System ceiling	 414 90 01 - MOUNTING KIT FLUSH SPY	Required
 Plasterboard	 414 90 01 - MOUNTING KIT FLUSH SPY	Required
 Stucanet	 414 90 01 - MOUNTING KIT FLUSH SPY	Required
 Wood	-	
 Concrete	-	
 Concrete + plaster	 414 90 01 - MOUNTING KIT FLUSH SPY	Required
 Lintel + plaster	 414 90 01 - MOUNTING KIT FLUSH SPY	Required
 Hollow-core slab	-	
 Hollow-core slab + plaster	 414 90 01 - MOUNTING KIT FLUSH SPY	Required
 Stretched ceiling	-	

DELTALIGHT

SPY 52 CLIP TW 96545

19822 9030 W-W

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




21012 0355 LED POWER SUPPLY 500mA-DC 2CH TW DIM5

2

Dimtype: DALI

Cutout dimension (mm): 85


Mounting kits




414 90 01 MOUNTING KIT FLUSH SPY

Cutout dimension (mm): 83


Light altering devices




19810 0010 B HONEYCOMB 42 SINGLE USE B



19810 0020 LINEAR SPREAD LENS 42



19810 0030 SPREAD LENS 42





19810 0040 SOFTENING LENS 42


DELTALIGHT

SPY 52 CLIP TW 96545

19822 9030 W-W

	19810 0050 GLASS SBL 42	☐
	19810 0060 B HONEYCOMB 42 DOUBLE USE B	☐

Finish your product

	19810 0100 B SPY 52 TUBE B	☐
	19810 0100 FBR SPY 52 TUBE FBR	☐
	19810 0100 FG SPY 52 TUBE FG	☐
	19810 0100 GC SPY 52 TUBE GC	☐
	19810 0100 W SPY 52 TUBE W	☐

Replaceable reflector / lens

	19810 0180 SPY 52 REFLECTOR 20°	☐
	19810 0190 SPY 52 REFLECTOR 45°	☐
	19810 0240 SPY 52 REFLECTOR 30°	☐

DELTALIGHT

SPY 52 CLIP TW 96545

19822 9030 W-W

Notes: