




M20/M26H - SPY 66 93030 MDL
23327 9320 W

AVAILABLE IN
BLACK 23327 9320 B
WHITE 23327 9320 W

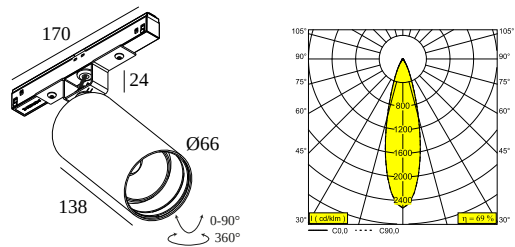

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.6
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-30° EXCL.LED POWER SUPPLY 48V-DC Optional REFLECTORS 18° & 45° available

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, EPD

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 25W / CRI>90 (R9: 52) / 3000K / 2811lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	2811lm // 25W // 112lm/W
LED TECHNICS (LUMINAIRE)	1937lm // 28,8W // 67lm/W

Remarks
Take a look at our MAGNETIC PROFILES movie

Requirements
SPY 66 TUBE LED POWER SUPPLY 48V-DC

Options
DIMMABLE MODULATOR

Accessories
HONEYCOMB 57

DELTALIGHT

M20/M26H - SPY 66 93030 MDL

23327 9320 W

For detailed installation instructions, please consult the manual : [23327_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Current supply

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



21032 0030 SMART 48 MODULATOR PLUG-IN WD

6

Dimtype: WDL = wireless dimmable

SMART 48

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 90 011 SMART 48 MODULATOR DIM9

6

Dimtype: 1-10V or DALI or push button



300 90 012 SMART 48 MODULATOR WD

6

Dimtype: WDL = wireless dimmable

LED power supplies

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

3

Dimtype: non-dimmable

DELTALIGHT

M20/M26H - SPY 66 93030 MDL


23327 9320 W

	300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN	8	☐
Dimtype: non-dimmable			
	21012 0230 LED POWER SUPPLY 48V-DC / 100W	3	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 40			
	21012 0240 LED POWER SUPPLY 48V-DC / 200W	7	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 40			

Light altering devices

	24611 0150 B HONEYCOMB 57 SINGLE USE B	☐
--	---	--------------------------

Finish your product

	24611 0100 B SPY 66 TUBE B	☐
	24611 0100 FBR SPY 66 TUBE FBR	☐
	24611 0100 FG SPY 66 TUBE FG	☐
	24611 0100 GC SPY 66 TUBE GC	☐
	24611 0100 W SPY 66 TUBE W	☐

DELTALIGHT

M20/M26H - SPY 66 93030 MDL

23327 9320 W

Replaceable reflector / lens



24611 0220 SPY 66 REFLECTOR 18°



24611 0230 SPY 66 REFLECTOR 30°




24611 0240 SPY 66 REFLECTOR 45°




COMPATIBLE COMPOSABLES

SHIFTLINE M26H profile


Available Colours




23359 0000 SLM26H - PROFILE



23359 0010 SLM26H - PROFILE 1m



23359 0020 SLM26H - PROFILE 2m



23359 0030 SLM26H - PROFILE 3m



SPLITLINE M20 ST profile

Available Colours



23397 0000 SPM20 ST - PROFILE



DELTALIGHT

M20/M26H - SPY 66 93030 MDL

23327 9320 W



23397 0020 SPM20 ST - PROFILE 2m




23397 0030 SPM20 ST - PROFILE 3m




SPLITLINE M20 profile


Available Colours




420 20 10 00 SPM20 - PROFILE 1m



420 20 20 00 SPM20 - PROFILE 2m



420 20 30 00 SPM20 - PROFILE 3m



23301 0000 SPM20 - PROFILE B



Notes: