

# INFORM R



Who says light for the workplace needs to be boring? Inform R enables you to bring a touch of creativity into the clean and straight lines of the contemporary office environment. Inform R is a family of atypical shapes which are still compliant with the EN 12464, the standard for office lighting.

Specification	
Aperture:	5/8"
Installation method:	4" J-Box
Adjustability:	Fixed
Rating:	IP20

Performance	
CRI:	90
McAdam Step:	3
LED Maintenance:	L80>60,000h

*Power	Down (71°)	Up (Optional)
Inform R SP:	26W	13W

Delivered Lumens	2700K (Down/Up)	3000K (Down/Up)	3500K (Down/Up)
Inform R Down:	2886	2926	2998
Inform R Down-Up:	2761/1106	2800/1121	2868/1149

#### Listing

ETL certified to US and Canadian safety standards.

#### Warranty

5-year limited warranty.

## Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: INFR07-SPDN30-FG-B-ONSPB-RMTD1-UNV

Luminaire	Shape	Size	Downlight*	Uplight*	CCT	Finish	Style	Installation	Hardware Finish <sup>2</sup>	Application	Controls***
INF INFORM	R Round	07 777mm / 30 <sup>19</sup> / <sub>32</sub> "	SP Standard Power	DN Downlight only 71°, no uplight  DU <sup>1</sup> Downlight 71° with uplight added	27 2700K  30 3000K  35 3500K	B-B Black-Black  B-FG Black- Flemish Gold  FG-B Flemish Gold-Black  W-B White-Black  W-W White-White	ON <sup>1</sup> Surface mount    PC Pendant, 4 suspension points	SP Round coverplate for 4" junction box   PR Round coverplate for 4" junction box	B Black  W White	RMT Remote Power Supply	D1-UNV 0-10V dim 120-277V

<sup>1</sup> DU down-up not available in surface mount (Style ON).

<sup>2</sup> Applies to Installation SP & PR (coverplate).

\*\*\* Contact factory for Dali, DMX, or other dimming options.

## Related Products

Inform SQ (linear), Conform, Lass-Oh, Lass-Oh L (linear)

# DELTALIGHT

www.deltalight.com



Finish Options


INFORM R ON



INFORM R PENDANT




FINISH DETAIL

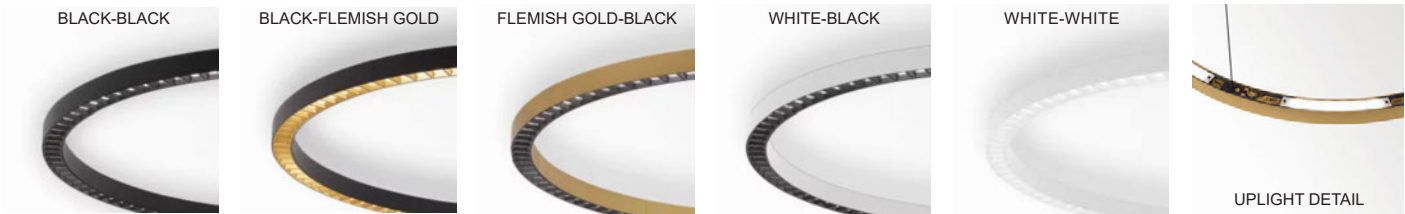


Photometric Data

INFORM R DOWN




INFORM R DOWN-UP



Installation Options

REMOTE DRIVER


A: 8" x B: 2"-3/16" x C: 4"-1/4"  
A: 203mm x B: 72mm x C: 108mm



• For Remote application  
• ETL Listed  
• Damp rated

SP - COVERPLATE R 129


PR - COVERPLATE R 212



Ø108mm  
Ø4"-1/4"

BLACK or WHITE  
Requires 4" junction box

Included for STYLE ON



Ø108mm  
Ø4"-1/4"

BLACK or WHITE  
Requires 4" junction box

Included for STYLE PC

Driver Options

**D1**

- Dimming Control 0-10V
- Dimming Range 1-100%
- Dim to off yes at 0.7mA
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥87
- THD @ Full Load <20%
- Title 24 Compliant

**Dimmer Compatibility**

- Leviton IP710-DLZ
- Lutron DVTV-XX
- WattStopper ADF-120277
- Synergy Lighting Controls ISD BC

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.