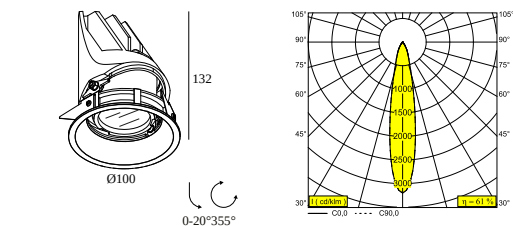




ENTERO RD-M X TW 96518

28445 9010 B

AVAILABLE IN
BLACK 28445 9010 B
FLEMISH BRONZE OUTDOOR 28445 9010 FBRX
FULL WHITE 28445 9010 FW
ANTHRACITE 28445 9010 N



 [View on website](#)



General info

LOCATION	outdoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 92
RECESSED DEPTH (MM)	140
THICKNESS OF MOUNTING SURFACE (MM)	max.16
INGRESS PROTECTION	IP65
PROTECTION AGAINST MECHANICAL IMPACT	IK06
WEIGHT (KG)	0.46
ADJUSTABILITY	0° to 20° swiveling, 355° rotatable
INFORMATION	REFLECTOR SP-18° EXCL.LED POWER SUPPLY 500mA-DC TW - (DALI DT8)

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, EPD

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 9W / CRI>90 (R9: 50) / 2700K-6500K / 1087lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	18°
LED TECHNICS (LIGHT SOURCE)	1087lm // 9W // 121lm/W
LED TECHNICS (LUMINAIRE)	660lm // 10,4W // 64lm/W

Requirements

LED POWER SUPPLY 500mA-DC TW

Options

ENTERO RD-M MOUNTING SET S2

Accessories

ENTERO M HONEYCOMB
ENTERO M LINEAR SPREAD LENS
ENTERO M SPREAD LENS
ENTERO M SOFTENING LENS

DELTALIGHT

ENTERO RD-M X TW 96518

28445 9010 B

ENTERO M GLASS SBL

For detailed installation instructions, please consult the manual : [28445_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Stucanet	-
 Wood	-
 Concrete	 28500 0200 - ENTERO RD-M MOUNTING SET S2 Required
 Concrete + plaster	 28500 0200 - ENTERO RD-M MOUNTING SET S2 Required
 Lintel + plaster	 28500 0200 - ENTERO RD-M MOUNTING SET S2 Required
 Hollow-core slab	 28500 0200 - ENTERO RD-M MOUNTING SET S2 Required
 Hollow-core slab + plaster	 28500 0200 - ENTERO RD-M MOUNTING SET S2 Required
 Stretched ceiling	-

FINISH YOUR SPECIFICATION

LED power supplies	# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.	Min current Max current

DELTALIGHT

ENTERO RD-M X TW 96518

28445 9010 B



21012 0355 LED POWER SUPPLY 500mA-DC 2CH TW DIM5

2

☐


Dimtype: DALI

Cutout dimension (mm): 85


Light altering devices




28500 0070 ENTERO M LINEAR SPREAD LENS

☐


28500 0080 ENTERO M SPREAD LENS

☐

28500 0090 ENTERO M SOFTENING LENS

☐

28500 0100 ENTERO M GLASS SBL

☐

28500 0110 B ENTERO M HONEYCOMB SINGLE USE B

☐

Mounting set S2



28500 0200 ENTERO RD-M MOUNTING SET S2

☐

Notes:

DELTALIGHT

ENTERO RD-M X TW 96518

28445 9010 B