




SUPERLOOP-FIX 45 93040 MDL

418 263 933 MDL B

AVAILABLE IN
BLACK 418 263 933 MDL B

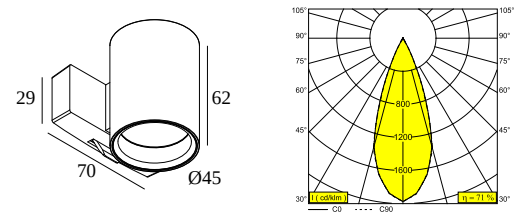

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.2
ADJUSTABILITY	non adjustable
INFORMATION	REFLECTOR WFL-40° INCL.CLIP 48V ADAPTER EXCL.LED POWER SUPPLY 48V-DC

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	E

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 8,1W / CRI>90 / 3000K / 877lm
SDCM	SDCM2
RISKGROUP	RG1
BEAMANGLE	40°
LED TECHNICS (LIGHT SOURCE)	877lm // 8,1W // 108lm/W
LED TECHNICS (LUMINAIRE)	623lm // 9,3W // 67lm/W

Requirements	
MIDISPY TUBE	
LED POWER SUPPLY 48V-DC	

Options	
DIMMABLE MODULATOR	

For detailed installation instructions, please consult the manual : [418_263_9X3_MD_L_HAND.pdf](#)

SUPERLOOP-FIX 45 93040 MDL

418 263 933 MDL B

FINISH YOUR SPECIFICATION


SMART 48

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



300 90 011 SMART 48 MODULATOR DIM9

20

Dimtype: 1-10V or DALI or push button



300 90 012 SMART 48 MODULATOR WD

20

Dimtype: WDL = wireless dimmable


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 89 48 90 LED POWER SUPPLY 48V-DC / 90W

10

Dimtype: non-dimmable


Cutout dimension (mm): 75



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

10


Dimtype: non-dimmable



300 89 48 150 LED POWER SUPPLY 48V-DC / 150W

16

Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN



25

Dimtype: non-dimmable


DELTALIGHT

SUPERLOOP-FIX 45 93040 MDL



418 263 933 MDL B

	21012 0230 LED POWER SUPPLY 48V-DC / 100W	10	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 40		
	21012 0240 LED POWER SUPPLY 48V-DC / 200W	21	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 40		

Finish your product

	414 03 00 B MIDISPY TUBE B	☐
	414 03 00 FBR MIDISPY TUBE FBR	☐
	414 03 00 FG MIDISPY TUBE FG	☐
	414 03 00 MMAT MIDISPY TUBE MMAT	☐
	414 03 00 SG MIDISPY TUBE SG	☐
	414 03 00 W MIDISPY TUBE W	☐


COMPATIBLE COMPOSABLES

SUPERLOOP HC MDL	Available Colours
	
418 481 07 SUPERLOOP HC 70 MDL	
	
418 481 09 SUPERLOOP HC 90 MDL	

DELTALIGHT


SUPERLOOP-FIX 45 93040 MDL

418 263 933 MDL B



418 481 12 SUPERLOOP HC 120 MDL






418 481 17 SUPERLOOP HC 170 MDL




SUPERLOOP HC MDL XL

Available Colours




20555 0000 SUPERLOOP HC 200 MDL






20556 0000 SUPERLOOP HC 250 MDL






20557 0000 SUPERLOOP HC 300 MDL






20558 0000 SUPERLOOP HC 350 MDL





20559 0000 SUPERLOOP HC 400 MDL






20560 0000 SUPERLOOP HC 500 MDL



SUPERLOOP S HC MDL

Available Colours




418 482 106 SUPERLOOP S HC 106 MDL




DELTALIGHT

SUPERLOOP-FIX 45 93040 MDL


418 263 933 MDL B



418 482 109 SUPERLOOP S HC 109 MDL



418 482 211 SUPERLOOP S HC 211 MDL



418 482 217 SUPERLOOP S HC 217 MDL



Notes: