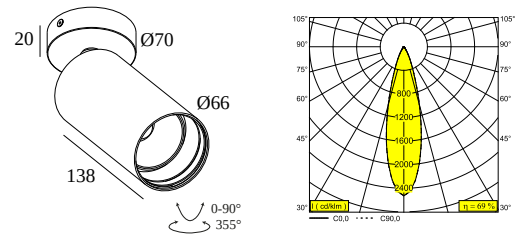




SPY 66 ON TW 96530

24624 9020 FW

AVAILABLE IN
BLACK 24624 9020 B
FULL WHITE 24624 9020 FW
WHITE 24624 9020 W



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.6
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-30° EXCL.LED POWER SUPPLY 500mA-DC TW - (DALI DT8) Optional REFLECTORS 18° & 45° available

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, LCA

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 9W / CRI>90 (R9: 50) / 2700K-6500K / 1087lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	1087lm // 9W // 121lm/W
LED TECHNICS (LUMINAIRE)	749lm // 10,4W // 72lm/W

Requirements	
SPY 66 TUBE	
LED POWER SUPPLY 500mA-DC TW	

Options	
COVERSET R 90-100	

Accessories	
HONEYCOMB 57	
SPREAD LENS 57	
LINEAR SPREAD LENS 57	
SOFTENING LENS 57	
GLASS SBL 57	

For detailed installation instructions, please consult the manual : [24624_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION


LED power supplies		# of Fixtures
# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
124 24 79 21012 0355 LED POWER SUPPLY 500mA-DC 2CH TW DIM5 Dimtype: DALI Cutout dimension (mm): 85	2	
Coversets		
Ø90 Ø10 2 204 00 90 ANO COVERSET R 90 ANO		
204 00 90 B COVERSET R 90 B		
204 00 90 W COVERSET R 90 W		
Ø100 Ø10 2 204 00 100 ANO COVERSET R 100 ANO		
204 00 100 B COVERSET R 100 B		
204 00 100 W COVERSET R 100 W		

DELTALIGHT


SPY 66 ON TW 96530

24624 9020 FW


Light altering devices




24611 0150 B HONEYCOMB 57 SINGLE USE B

☐


24611 0160 GLASS SBL 57

☐


24611 0170 LINEAR SPREAD LENS 57

☐

24611 0190 SOFTENING LENS 57

☐


24611 0200 SPREAD LENS 57

☐

24611 0210 B HONEYCOMB 57 DOUBLE USE B

☐

Finish your product



24611 0100 B SPY 66 TUBE B

☐

24611 0100 FBR SPY 66 TUBE FBR

☐

24611 0100 FG SPY 66 TUBE FG

☐

24611 0100 GC SPY 66 TUBE GC

☐

DELTALIGHT

SPY 66 ON TW 96530

24624 9020 FW

24611 0100 W SPY 66 TUBE W

☐

Replaceable reflector / lens



24611 0220 SPY 66 REFLECTOR 18°

☐

24611 0230 SPY 66 REFLECTOR 30°

☐

24611 0240 SPY 66 REFLECTOR 45°

☐

Notes: