



## CONFORM P20 PDS DOWN-UP 954067


26515 7420 B-FG

AVAILABLE IN

**BLACK-BLACK** 26515 7420 B-B

**BLACK-FLEMISH GOLD** 26515 7420 B-FG

**WHITE-BLACK** 26515 7420 W-B

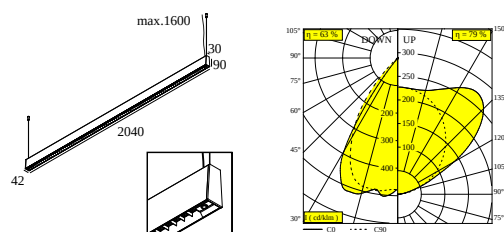

[View on website](#)



### General info

|                           |                                                                                                                                                                                                                                                    |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LOCATION</b>           | indoor                                                                                                                                                                                                                                             |
| <b>INSTALLATION</b>       | Ceiling Suspended                                                                                                                                                                                                                                  |
| <b>INGRESS PROTECTION</b> | IP20                                                                                                                                                                                                                                               |
| <b>WEIGHT (KG)</b>        | 5.6                                                                                                                                                                                                                                                |
| <b>ADJUSTABILITY</b>      | non adjustable                                                                                                                                                                                                                                     |
| <b>INFORMATION</b>        | 84 x REFLECTOR FL-67° (DOWN)<br>INCL.DIMMABLE LED POWER SUPPLY 900mA-DC DOWN / 700mA-DC UP<br>INCL.PRESENCE & DAYLIGHT SENSOR<br>INCL.2 x CABLE SUSPENSION SINGLE AUTO. 1,6m<br>INCL.1 x CABLE 3 x 0.75mm <sup>2</sup><br>NATURAL LIGHT TECHNOLOGY |

### Electrical info

|                     |                      |
|---------------------|----------------------|
| <b>ELECTRICAL</b>   | 220-240V / 0 50-60Hz |
| <b>CLASS</b>        | I                    |
| <b>POWER SUPPLY</b> | YES                  |
| <b>DIM TYPE</b>     | non-dimmable         |
| <b>ENERGY CLASS</b> | D                    |
| <b>CERTIFICATES</b> | CB, ENEC, RCM        |

### Lightsource info

|                                    |                                                                                                                        |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| <b>LIGHTSOURCE NAME</b>            | LED                                                                                                                    |
| <b>LIGHTSOURCE</b>                 | DOWN: LED cluster 30,5W / CRI>95 (R9: 50) / 4000K / 3746lm<br>UP: LED cluster 23,1W / CRI>95 (R9: 50) / 4000K / 2813lm |
| <b>SDCM</b>                        | SDCM3                                                                                                                  |
| <b>LM80</b>                        | L80 > 60000                                                                                                            |
| <b>BEAMANGLE</b>                   | 67°                                                                                                                    |
| <b>LED TECHNICS (LIGHT SOURCE)</b> | DOWN: 3746lm // 30,5W // 123lm/W<br>UP: 2813lm // 23,1W // 121lm/W                                                     |
| <b>LED TECHNICS (LUMINAIRE)</b>    | DOWN: 2352lm // 35,1W // 67lm/W<br>UP: 2217lm // 26,6W // 83lm/W                                                       |

### Options

CABLE BASE R / S

COVERSET R 62-90-100 / S 62-80-90

CONNECTION ST / CONNECTION TRIMLESS

SUSPENSION ST / SUSPENSION TRIMLESS



For detailed installation instructions, please consult the manual : [26515\\_XXX0\\_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Current supply

|                                                                                    |                                              |                          |
|------------------------------------------------------------------------------------|----------------------------------------------|--------------------------|
|    | <b><u>203 99 55 ANO</u></b> CABLE BASE R ANO | <input type="checkbox"/> |
|                                                                                    | <b><u>203 99 55 B</u></b> CABLE BASE R B     | <input type="checkbox"/> |
|                                                                                    | <b><u>203 99 55 W</u></b> CABLE BASE R W     | <input type="checkbox"/> |
|  | <b><u>203 99 56 ANO</u></b> CABLE BASE S ANO | <input type="checkbox"/> |
|                                                                                    | <b><u>203 99 56 B</u></b> CABLE BASE S B     | <input type="checkbox"/> |
|                                                                                    | <b><u>203 99 56 W</u></b> CABLE BASE S W     | <input type="checkbox"/> |

Coversets

|                                                                                    |                                               |                          |
|------------------------------------------------------------------------------------|-----------------------------------------------|--------------------------|
|  | <b><u>204 00 62 ANO</u></b> COVERSET R 62 ANO | <input type="checkbox"/> |
|                                                                                    | <b><u>204 00 62 B</u></b> COVERSET R 62 B     | <input type="checkbox"/> |
|                                                                                    | <b><u>204 00 62 W</u></b> COVERSET R 62 W     | <input type="checkbox"/> |
|  | <b><u>204 00 90 ANO</u></b> COVERSET R 90 ANO | <input type="checkbox"/> |

# DELTALIGHT

## CONFORM P20 PDS DOWN-UP 954067

26515 7420 B-FG


|                                                                                     |                              |                    |                          |
|-------------------------------------------------------------------------------------|------------------------------|--------------------|--------------------------|
|                                                                                     | <b><u>204 00 90 B</u></b>    | COVERSET R 90 B    | <input type="checkbox"/> |
|                                                                                     | <b><u>204 00 90 W</u></b>    | COVERSET R 90 W    | <input type="checkbox"/> |
|     | <b><u>204 00 100 ANO</u></b> | COVERSET R 100 ANO | <input type="checkbox"/> |
|                                                                                     | <b><u>204 00 100 B</u></b>   | COVERSET R 100 B   | <input type="checkbox"/> |
|                                                                                     | <b><u>204 00 100 W</u></b>   | COVERSET R 100 W   | <input type="checkbox"/> |
|    | <b><u>204 62 62 ANO</u></b>  | COVERSET S 62 ANO  | <input type="checkbox"/> |
|                                                                                     | <b><u>204 62 62 B</u></b>    | COVERSET S 62 B    | <input type="checkbox"/> |
|                                                                                     | <b><u>204 62 62 W</u></b>    | COVERSET S 62 W    | <input type="checkbox"/> |
|  | <b><u>204 80 80 ANO</u></b>  | COVERSET S 80 ANO  | <input type="checkbox"/> |
|                                                                                     | <b><u>204 80 80 B</u></b>    | COVERSET S 80 B    | <input type="checkbox"/> |
|                                                                                     | <b><u>204 80 80 W</u></b>    | COVERSET S 80 W    | <input type="checkbox"/> |
|  | <b><u>204 90 90 ANO</u></b>  | COVERSET S 90 ANO  | <input type="checkbox"/> |
|                                                                                     | <b><u>204 90 90 B</u></b>    | COVERSET S 90 B    | <input type="checkbox"/> |
|                                                                                     | <b><u>204 90 90 W</u></b>    | COVERSET S 90 W    | <input type="checkbox"/> |

# DELTALIGHT

## CONFORM P20 PDS DOWN-UP 954067

26515 7420 B-FG


### Suspension parts



**328 10 01** SUSPENSION TRIMLESS O.F.A.

☐

Cutout dimension (mm): 62 (CONCRETE: 102)



**15225 0340 B** SUSPENSION ST B


☐

Cutout dimension (mm): 27

**15225 0340 W** SUSPENSION ST W

☐

### Electric connection parts



**328 10 03** CONNECTION TRIMLESS O.F.A.

☐

Cutout dimension (mm): 62 (CONCRETE: 102)



**15225 0360 B** CONNECTION ST B


☐

Cutout dimension (mm): 43


**15225 0360 W** CONNECTION ST W

☐

### Other



**26510 0010** PDS REMOTE CONTROL

☐

**26510 0020** PDS SENSOR PROGRAMMER

☐

# DELTALIGHT

## CONFORM P20 PDS DOWN-UP 954067

26515 7420 B-FG

Notes: