




MICROSPY 39 C 92745

279 773 811 921 W

AVAILABLE IN
BLACK 279 773 811 921 B
BRUSHED ALU 279 773 811 921 BRA
BRUSHED ANTHRACITE 279 773 811 921 BRAT
BRUSHED COPPER 279 773 811 921 BRCU
BRUSHED GOLD 279 773 811 921 BRG
BRUSHED OLD BRONZE 279 773 811 921 BROB
WHITE 279 773 811 921 W

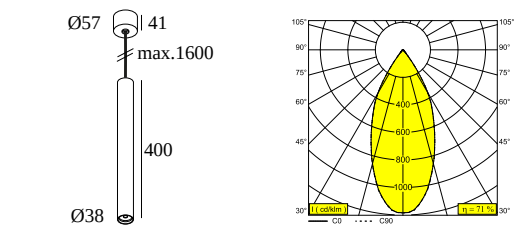

[View on website](#)




General info	
LOCATION	indoor
INSTALLATION	Ceiling Suspended
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.7
ADJUSTABILITY	non adjustable
INFORMATION	REFLECTOR WFL-45° INCL.LED POWER SUPPLY 350mA-DC INCL.1 x CABLE 2 x 0.75mm² / 1,6m
Electrical info	
ELECTRICAL	110-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	non-dimmable
ENERGY CLASS	D
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8W / CRI>90 (R9: 60) / 2700K / 753lm
TM-30 VALUES	Rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	45°
LED TECHNICS (LIGHT SOURCE)	753lm // 5,8W // 129lm/W
LED TECHNICS (LUMINAIRE)	507lm // 6,7W // 76lm/W
Options	
CONNECTION TRIMLESS	

For detailed installation instructions, please consult the manual : [279_773_811_XXX_HAND.pdf](#)

FINISH YOUR SPECIFICATION


Suspension parts



15229 0010 B CABLE CLAMP B

☐

Electric connection parts



328 10 03 CONNECTION TRIMLESS O.F.A.

☐

Cutout dimension (mm): 62 (CONCRETE: 102)

Notes: