




SPY 27 CLIP 92730

24118 9220 FG-B

AVAILABLE IN  
**BLACK-BLACK** 24118 9220 B-B  
**FLEMISH BRONZE-BLACK** 24118 9220 FBR-B  
**FLEMISH GOLD-BLACK** 24118 9220 FG-B  
**FULL WHITE** 24118 9220 FW  
**GOLD COLORED-BLACK** 24118 9220 GC-B  
**WHITE-WHITE** 24118 9220 W-W

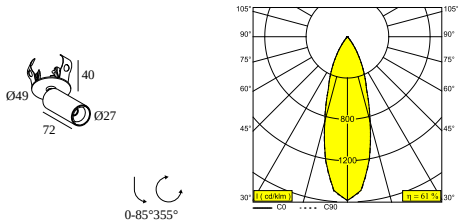

 [View on website](#)



| General info           |                                                                                                                |
|------------------------|----------------------------------------------------------------------------------------------------------------|
| LOCATION               | indoor                                                                                                         |
| INSTALLATION           | Ceiling Semi-recessed                                                                                          |
| CUTOUT SHAPE/SIZE (MM) | round - 43                                                                                                     |
| RECESSED DEPTH (MM)    | 40                                                                                                             |
| INGRESS PROTECTION     | IP20                                                                                                           |
| WEIGHT (KG)            | 0.2                                                                                                            |
| ADJUSTABILITY          | 0° to 85° swiveling, 355° rotatable                                                                            |
| INFORMATION            | REFLECTOR FL-30°<br>EXCLED POWER SUPPLY 350mA-DC<br>SPY 27 TUBE included (B for all versions W for FW version) |

| Electrical info |                           |
|-----------------|---------------------------|
| CLASS           | III                       |
| DIM TYPE        | depending on power supply |
| ENERGY CLASS    | D                         |
| CERTIFICATES    | CB, ENEC, LCA             |

| Lightsource info            |                                                  |
|-----------------------------|--------------------------------------------------|
| LIGHTSOURCE NAME            | LED                                              |
| LIGHTSOURCE                 | LED array 5,8W / CRI>90 (R9: 60) / 2700K / 753lm |
| TM-30 VALUES                | rf: 89 / Rg: 100                                 |
| SDCM                        | SDCM1                                            |
| RISKGROUP                   | RG1                                              |
| LM80                        | L90B10 > 50000                                   |
| BEAMANGLE                   | 30°                                              |
| LED TECHNICS (LIGHT SOURCE) | 753lm // 5,8W // 129lm/W                         |
| LED TECHNICS (LUMINAIRE)    | 459lm // 6,7W // 69lm/W                          |

| Requirements                  |
|-------------------------------|
| LED POWER SUPPLY 350mA-DC DIM |

| Accessories |
|-------------|
| VISOR 27    |

For detailed installation instructions, please consult the manual : [24118\\_XXX0\\_HAND.pdf](#)

### FINISH YOUR SPECIFICATION


#### LED power supplies

#### # of Fixtures



# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



**300 48 350 ED1** LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1

2

Dimtype: 1-10V

Cutout dimension (mm): 30



**300 48 350 ED5** LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

2

Dimtype: DALI

Cutout dimension (mm): 45



**300 48 350 MDL** LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL

2

Dimtype: non-dimmable

Cutout dimension (mm): 30




**300 48 350 WDL** LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL

2

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45




**300 90 61** LED POWER SUPPLY MULTI-POWER DIM6

2

Dimtype: mains (phase cut-off) or push button

Cutout dimension (mm): 56




**300 90 63** LED POWER SUPPLY MULTI-POWER DIM9

4(4)

Dimtype: 1-10V or DALI or push button

Cutout dimension (mm): 82




**300 90 64** LED POWER SUPPLY MULTI-POWER DIM7

2(2)

Dimtype: 1-10V or push button

Cutout dimension (mm): 72



**300 90 67** LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9


2

Dimtype: 1-10V or DALI or push button

# DELTALIGHT

## SPY 27 CLIP 92730

24118 9220 FG-B



**300 90 68**


LED POWER SUPPLY MULTI-POWER DIM5

2(2)



**Dimtype: DALI**

**Cutout dimension (mm): 72**



**300 90 69**

LED POWER SUPPLY MULTI-POWER HV DIM9

2->6(6)



**Dimtype: 1-10V or DALI or push button**

**Cutout dimension (mm): 84**



**300 90 124**


LED POWER SUPPLY MULTI-POWER DIM7

3(2)



**Dimtype: 1-10V or push button**

**Cutout dimension (mm): 55**



**300 90 125**


LED POWER SUPPLY MULTI-POWER MINI DIM5

2(2)



**Dimtype: DALI**

**Cutout dimension (mm): 55**



**300 90 135**


LED POWER SUPPLY MULTI-POWER HV

3->4



**Dimtype: non-dimmable**

**Cutout dimension (mm): 90**



**21012 0010**


LED POWER SUPPLY MULTI POWER

2



**Dimtype: non-dimmable**

**Cutout dimension (mm): 50**



**21012 0021**


LED POWER SUPPLY MULTI POWER DIM1

3



**Dimtype: 1-10V**

**Cutout dimension (mm): 54**



**21012 0035**


LED POWER SUPPLY MULTI POWER DIM5

3



**Dimtype: DALI**

**Cutout dimension (mm): 54**



**21012 004W**


LED POWER SUPPLY MULTI-POWER WDL

4(4)



**Dimtype: WDL = wireless dimmable**

**Cutout dimension (mm): 84**



**21012 005W**

LED POWER SUPPLY MULTI-POWER COMPACT WDL

3








**Dimtype: WDL = wireless dimmable**

**Cutout dimension (mm): 54**

# DELTALIGHT

## SPY 27 CLIP 92730



24118 9220 FG-B

|                                                                                    |                                                                      |      |                          |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------|------|--------------------------|
|    | <b>21012 0268</b> LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8    | 2->2 | <input type="checkbox"/> |
| Dimtype: mains (phase cut-off)                                                     |                                                                      |      |                          |
| Cutout dimension (mm): 50                                                          |                                                                      |      |                          |
|    | <b>21012 0298</b> LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8    | 2    | <input type="checkbox"/> |
| Dimtype: mains (phase cut-off)                                                     |                                                                      |      |                          |
| Cutout dimension (mm): 48                                                          |                                                                      |      |                          |
|    | <b>21012 0308</b> LED POWER SUPPLY 350mA / 7,35W DIM8                | 1    | <input type="checkbox"/> |
| Dimtype: mains (phase cut-off)                                                     |                                                                      |      |                          |
| Cutout dimension (mm): 40                                                          |                                                                      |      |                          |
|    | <b>21012 0480</b> LED POWER SUPPLY 350mA-DC / 17W IP68               | 2(2) | <input type="checkbox"/> |
| Dimtype: non-dimmable                                                              |                                                                      |      |                          |
| Cutout dimension (mm): 60                                                          |                                                                      |      |                          |
|  | <b>21032 0295</b> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 | 2    | <input type="checkbox"/> |
| Dimtype: DALI                                                                      |                                                                      |      |                          |
| Cutout dimension (mm): 30                                                          |                                                                      |      |                          |

### Light altering devices

|                                                                                    |                                |                          |
|------------------------------------------------------------------------------------|--------------------------------|--------------------------|
|  | <b>24144 0040 B</b> VISOR 27 B | <input type="checkbox"/> |
|------------------------------------------------------------------------------------|--------------------------------|--------------------------|


## COMPATIBLE COMPOSABLES

| ZOOVER 4CLIP                                                                        | Available Colours                                  |
|-------------------------------------------------------------------------------------|----------------------------------------------------|
|  | <b>28215 0005</b> ZOOVER 4CLIP 120 LIGHT GREY DIM5 |
|  | <b>28216 0005</b> ZOOVER 4CLIP 120 DARK GREY DIM5  |


# DELTALIGHT

## SPY 27 CLIP 92730

24118 9220 FG-B



**28217 0005** ZOOVER 4CLIP 140 LIGHT GREY DIMS



**28218 0005** ZOOVER 4CLIP 140 DARK GREY DIMS



Notes: