




M26L - SPY FOCUS LP 930 DIM5
23231 9305 B

AVAILABLE IN
BLACK 23231 9305 B
FLEMISH BRONZE 23231 9305 FBR
FLEMISH GOLD 23231 9305 FG
WHITE 23231 9305 W

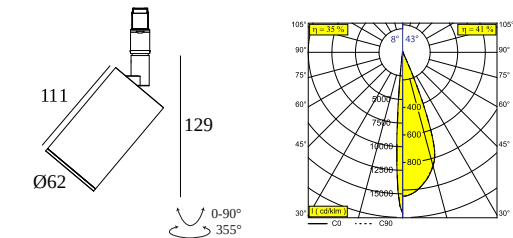

[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	ADJUSTABLE BEAM 8°-43° INCL.CLIP 48V ADAPTER EXCL.LED POWER SUPPLY 48V-DC
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	CB, EAC, ENEC, EPD
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 8,6W / CRI>90 (R9: 52) / 3000K / 1018lm
TM-30 VALUES	Rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	8°-43°
LED TECHNICS (LIGHT SOURCE)	1018lm // 8,6W // 118lm/W
LED TECHNICS (LUMINAIRE)	417lm // 9,9W // 42lm/W

Remarks
Take a look at our **MAGNETIC PROFILES** movie

Requirements
LED POWER SUPPLY 48V-DC

For detailed installation instructions, please consult the manual : **23231_XXXX_HAND.pdf**

M26L - SPY FOCUS LP 930 DIM5

23231 9305 B

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 89 48 90 LED POWER SUPPLY 48V-DC / 90W

8

Dimtype: non-dimmable


Cutout dimension (mm): 75



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

9

Dimtype: non-dimmable



300 89 48 150 LED POWER SUPPLY 48V-DC / 150W

14


Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN

23

Dimtype: non-dimmable




21012 0230 LED POWER SUPPLY 48V-DC / 100W

9

Dimtype: non-dimmable

Cutout dimension (mm): 40



21012 0240 LED POWER SUPPLY 48V-DC / 200W

19

Dimtype: non-dimmable

Cutout dimension (mm): 40

Power box

of Fixtures





of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current






DELTALIGHT

M26L - SPY FOCUS LP 930 DIM5

23231 9305 B

	23377 0010 B SLM26L - POWERBOX 48V-DC / 96W B	10 ☐
Dimtype: non-dimmable		
23377 0010 W SLM26L - POWERBOX 48V-DC / 96W W		10 ☐
	23377 0020 B SLM26L - MID POWERBOX 48V-DC / 96W B	10 ☐
Dimtype: non-dimmable		
23377 0020 W SLM26L - MID POWERBOX 48V-DC / 96W W		10 ☐


COMPATIBLE COMPOSABLES

SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)	Available Colours
	23358 0000 SLM26L - PROFILE 
	23358 0010 SLM26L - PROFILE 1m 
	23358 0020 SLM26L - PROFILE 2m 
	23358 0030 SLM26L - PROFILE 3m 
SHIFTLINE M35R profile	Available Colours
	23375 0000 SLM35R - PROFILE 


DELTALIGHT

M26L - SPY FOCUS LP 930 DIM5


23231 9305 B



23375 0010 SLM35R - PROFILE 1m



23375 0020 SLM35R - PROFILE 2m



23375 0030 SLM35R - PROFILE 3m



Notes: