




SPY 52 ON 2 HE 92740 DIM8

19805 9238 B-B

AVAILABLE IN
BLACK-BLACK 19805 9238 B-B
FULL WHITE 19805 9238 FW
WHITE-WHITE 19805 9238 W-W

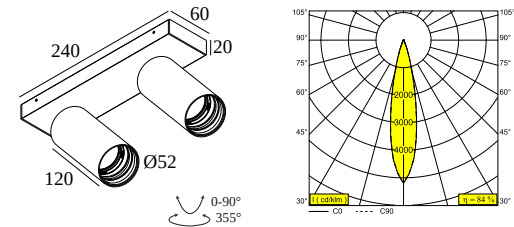

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	1
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	LENS WFL-40° INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	mains (phase cut-off)
ENERGY CLASS	G
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	2 x (LED array 6W / CRI>90 (R9: 50) / 2700K / 905lm)
TM-30 VALUES	rf: 96 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	40°
LED TECHNICS (LIGHT SOURCE)	1810lm // 12W // 150lm/W
LED TECHNICS (LUMINAIRE)	1408lm // 13,8W // 102lm/W
Remarks	
High Efficacy : > 100lm/W	
Requirements	
SPY 52 TUBE	

For detailed installation instructions, please consult the manual : [19805_XXX8_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Finish your product

	<u>19810 0100 B</u>	SPY 52 TUBE B	☐
	<u>19810 0100 FBR</u>	SPY 52 TUBE FBR	☐
	<u>19810 0100 FG</u>	SPY 52 TUBE FG	☐
	<u>19810 0100 GC</u>	SPY 52 TUBE GC	☐
	<u>19810 0100 W</u>	SPY 52 TUBE W	☐

Notes: