


LOGIC MINI

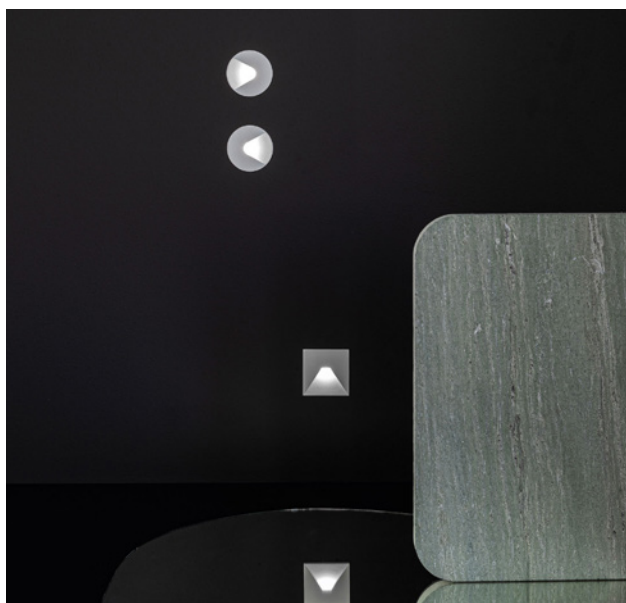

Logic is a complete range of water and shock-resistant lighting fixtures. Thanks to the use of powerful LED arrays, these wall recessed fixtures deliver an intense light effect.

| Specification | |
|----------------|----------------------------------|
| Wall Cut-out: | 2 ³ / ₁₆ " |
| Adjustability: | Fixed |
| Rating: | IP54 |

| Performance | |
|-----------------|------|
| CRI: | 80 |
| *Logic Mini SP: | 0.6W |

| Delivered Lumens | 3000K |
|------------------|-------|
| Logic Mini: | 4Lm |

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: LGC MR-A-30ND-24SPWX-RRMT

| Luminaire | Size | Shape | Finish | CCT | Controls*** | Power* | Function | Installation | Application |
|--------------|----------------|-------------------------------|---|-------------|----------------------|----------------------|--------------------------|--|----------------------------|
| LGC LOGIC | M Mini Wall | R Round S Square | A Alu Grey B Black FBRX Flemish Bronze N Anthracite W White | 30 3000K | ND-24 Non-Dim 24V | SP Standard Power | WX Wall, Exterior Use | R Recessed CF Concrete Flange | RMT Remote Power Supply |

*** Contact factory for additional dimming options.

Related Products

Heli X, Logic, Logic F




Finish Options

LOGIC MINI R


LOGIC MINI S

Photometric Data

LOGIC MINI R

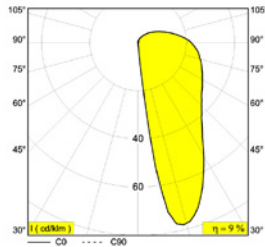

LOGIC MINI S

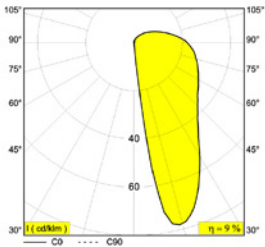


Installation Options

REMOTE DRIVER

A: 12" x B: 2"-7/8 x C: 4"-1/4
A: 305mm x B: 72mm x C: 108mm

- For Remote application
- ETL Listed
- Damp rated

CF - CONCRETE FLANGE

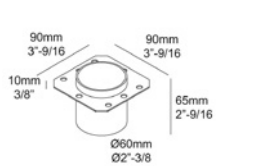

Driver Options

ND

- Dimming Control NON DIMMABLE
- Power Factor @ Full Load >0.95
- Efficiency @ Full Load ≥90
- THD @ Full Load <10%

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.