




## OML50 - INFORM D TW 1312mm 8+8LED 95063 DIM5

31427 9035 B

BESCHIKBAAR IN  
**ZWART** 31427 9035 B

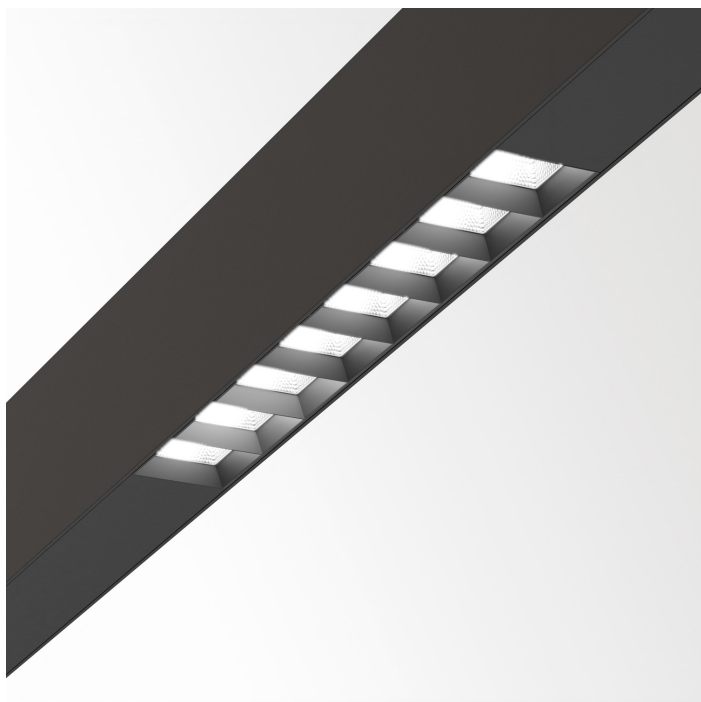

[Bekijk op website](#)



### Algemene info

|                               |                                                                   |
|-------------------------------|-------------------------------------------------------------------|
| <b>LOCATIE</b>                | binnen                                                            |
| <b>STOF EN WATERDICHTHEID</b> | IP20                                                              |
| <b>GEWICHT (KG)</b>           | 0                                                                 |
| <b>INFO</b>                   | INCL.DIMMABLE LED POWER SUPPLY<br>(DALI DT8)<br>CABLING 1 CIRCUIT |

### Elektrische info

|                           |                      |
|---------------------------|----------------------|
| <b>ELEKTRISCH</b>         | 220-240V / 0 50-60Hz |
| <b>KLASSE</b>             | I                    |
| <b>VOEDING INBEGREPEN</b> | YES                  |
| <b>DIM TYPE</b>           | DALI                 |
| <b>ENERGIE KLASSE</b>     | E                    |
| <b>CERTIFICATES</b>       | EPD, RCM             |

### Info lichtbron

|                                 |                                                                                                                                                  |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LIGHTSOURCE NAME</b>         | LED                                                                                                                                              |
| <b>LICHTBRON</b>                | @ 2700K: LED cluster 14,9W / CRI>90 (R9: 50) / 2700K-5000K / 1952lm<br>Or<br>@ 5000K: LED cluster 13,5W / CRI>90 (R9: 50) / 2700K-5000K / 2336lm |
| <b>SMD</b>                      | SDCM3                                                                                                                                            |
| <b>RISK-GROEP</b>               | RG1                                                                                                                                              |
| <b>LM80</b>                     | L80 > 60000                                                                                                                                      |
| <b>BEAMANGLE</b>                | 63°                                                                                                                                              |
| <b>LED TECHNIEK (LICHTBRON)</b> | @ 2700K: 1952lm // 14,9W // 131lm/W<br>Or<br>@ 5000K: 2336lm // 13,5W // 173lm/W                                                                 |

### Opties

WIRELESS CONTROL DIM5

Notes: