


# LOGIC W

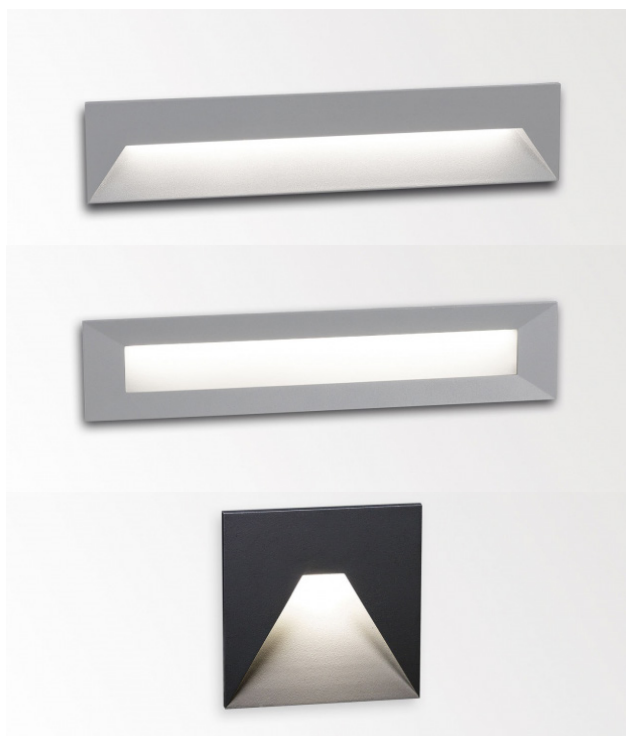

The Logic stands for a new generation of wall recessed luminaires. A complete range of 100% waterproof and shock-resistant led luminaires ensuring an intense light effect, thanks to use of powerful led arrays. The light effect of the Logic serves to enhance the architectural character of your project and landscape and this Logic W can perfectly be used as guidance light built in in the wall.

Specification	
Adjustability:	Fixed
Rating:	IP65

Performance	Logic W S	Logic W L / LF
CRI:	90	90
*Logic Mini SP:	7.1W	9.5W

Delivered Lumens	3000K
Logic W S:	172Lm
Logic W L:	127Lm
Logic W LF:	103Lm

#### Listing

ETL certified to US and Canadian safety standards.

#### Warranty

5-year limited warranty.

## Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: LGCWL-N-30ND-120SPWX-CLINC

Luminaire	Size	Shape	Finish	CCT	Controls***	Power*	Function	Installation	Application
<b>LGC</b> LOGIC	<b>W</b> Standard Wall	<b>S</b> Square  <b>L</b> Linear  <b>LF</b> Linear with flat lens	<b>A</b> Alu Grey  <b>B</b> Black  <b>FBRX</b> Flemish Bronze  <b>N</b> Anthracite  <b>W</b> White	<b>30</b> 3000K	<b>ND-120</b> Non-Dim 120V	<b>SP</b> Standard Power	<b>WX</b> Wall, Exterior Use	<b>CF</b> Concrete Flange  <b>CL</b> Concrete Trimless	<b>INC</b> Integral Power Supply

\*\*\* Contact factory for additional dimming options.

## Related Products

Logic Mini, Heli X, Logic F



Finish Options

LOGIC W S





ALU GREY



BLACK



FLEMISH BRONZE



ANTHRACITE



WHITE

LOGIC W L





ALU GREY



BLACK



FLEMISH BRONZE



ANTHRACITE



WHITE

LOGIC W LF





ALU GREY



BLACK



FLEMISH BRONZE




ANTHRACITE




WHITE

Photometric Data


LOGIC W S

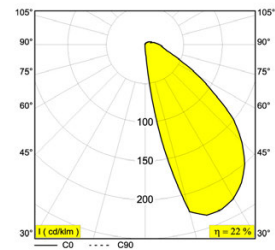

LOGIC W L

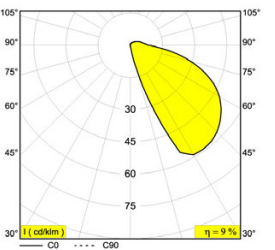


LOGIC W LF

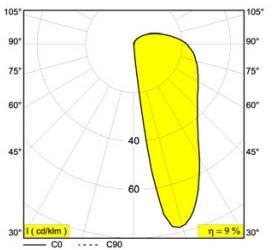


Installation Options

CF - CONCRETE FLANGE

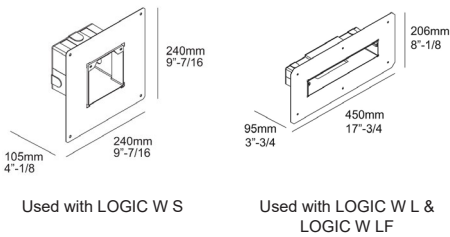

CL - CONCRETE TRIMLESS

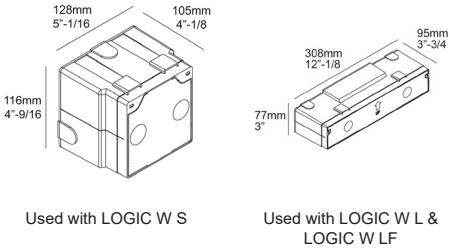

Driver Options

ND (With Shape S)

- Dimming Control           NON DIMMABLE
- Power Factor @ Full Load   >0.6
- Efficiency @ Full Load       ≥77
- THD @ Full Load           10%

ND (With Shape L and LF)

- Dimming Control           NON DIMMABLE
- Power Factor @ Full Load   >0.52
- Efficiency @ Full Load       ≥73

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.