



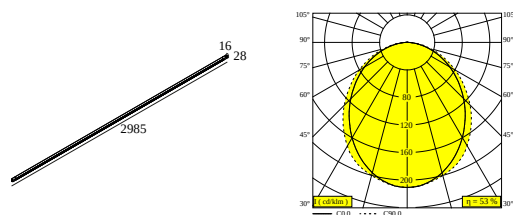
MIKALINE L298 930

30613 9300 B

AVAILABLE IN

BLACK 30613 9300 B

GOLD COLOURED 30613 9300 GC



[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Surface mounted,Ceiling Suspended,Wall Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	1.6
ADJUSTABILITY	non adjustable
INFORMATION	INCL.PLUG-IN-48V CABLE 11cm black EXCL.LED POWER SUPPLY 48V-DC connection max.140W (3A)

Electrical info

ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	G
CERTIFICATES	CB, ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED FLEX 41W / CRI>90 / 3000K /3278lm
LED TECHNICS (LIGHT SOURCE)	3278lm // 41W // 80lm/W
LED TECHNICS (LUMINAIRE)	1724lm // 47,2W // 37lm/W

Requirements

LED POWER SUPPLY 48V-DC (Remote)
POWERBOX 48V-DC PLUG-IN


Options

MIKALINE - JUNCTION / FIXATION
MIKALINE - CABLE SUSPENSION
PLUG-IN 48V CABLE
CONNECTION CLIP 1 x PLUG-IN 48V
CEILING BASE PLUG-IN 48V


For detailed installation instructions, please consult the manual : [30613_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION


Current supply



30610 0100 PLUG-IN 48V CABLE 11cm black

☐

30610 0110 PLUG-IN 48V CABLE 1,5m black

☐

30610 0120 PLUG-IN 48V CABLE 3m black


☐

30610 0140 B CONNECTION CLIP 1 x PLUG-IN 48V B

☐

Cutout dimension (mm): 51


LED power supplies



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

☐


Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN

☐

Dimtype: non-dimmable




21012 0230 LED POWER SUPPLY 48V-DC / 100W

☐

Dimtype: non-dimmable

Cutout dimension (mm): 40



21012 0240 LED POWER SUPPLY 48V-DC / 200W

☐




Dimtype: non-dimmable

Cutout dimension (mm): 40


DELTALIGHT

MIKALINE L298 930

30613 9300 B

	21032 0331 LED POWER SUPPLY 48V-DC / 90W DIM1	☐
Dimtype: 1-10V		
Cutout dimension (mm): 75		
	21032 0345 LED POWER SUPPLY 48V-DC / 90W DIM5	☐
Dimtype: DALI		
Cutout dimension (mm): 75		
	30610 0190 POWER ADAPTER 48V-DC / 60W PLUG-IN	☐
Dimtype: non-dimmable		

Power box

	30610 0170 B POWERBOX 48V-DC / 100W PLUG-IN B	☐
Dimtype: non-dimmable		

Suspension parts

	30610 0080 B MIKALINE - CABLE SUSPENSION SINGLE 1,6m B	☐
---	---	--------------------------



Fixation components

	30610 0010 C MIKALINE - JUNCTION 2 FLEX SET C	☐
	30610 0020 C MIKALINE - JUNCTION 3 FLEX C	☐

DELTALIGHT

MIKALINE L298 930

30613 9300 B

	30610 0030 C MIKALINE - JUNCTION 4 FLEX C	☐
	30610 0040 C MIKALINE - JUNCTION 2 HINGE C	☐
	30610 0050 C MIKALINE - FIXATION SIDE SET C	☐
	30610 0060 B MIKALINE - FIXATION SPACER FLEX SET B	☐
	30610 0070 C MIKALINE - FIXATION H/V FLEX C	☐
	30610 0090 B MIKALINE - FIXATION SPACER SET B	☐
	30610 0180 B MIKALINE - SPACER 90° 2 SET B	☐

Ceiling bases

	30610 0150 B CEILING BASE 3 x PLUG-IN 48V B	☐
	30610 0160 B CEILING BASE 1 x PLUG-IN 48V B	☐

DELTALIGHT

MIKALINE L298 930

30613 9300 B

Notes: