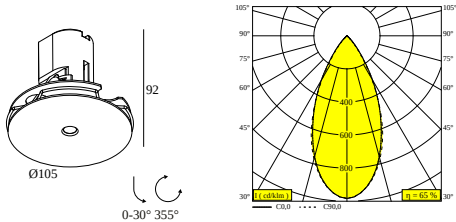


NIME II TRIMLESS OK 93052

26415 9330 PRIM

AVAILABLE IN  
PRIMER 26415 9330 PRIM



 [View on website](#)



| General info                |                                                          |
|-----------------------------|----------------------------------------------------------|
| LOCATION                    | indoor                                                   |
| INSTALLATION                | Ceiling Recessed                                         |
| CUTOUT SHAPE/SIZE (MM)      | round - Ø KIT                                            |
| RECESSED DEPTH (MM)         | 150                                                      |
| INGRESS PROTECTION          | IP20                                                     |
| WEIGHT (KG)                 | 0.3                                                      |
| ADJUSTABILITY               | 0° to 30° swiveling, 355° rotatable                      |
| INFORMATION                 | LENS WFL-52°<br>EXCL.LED POWER SUPPLY 350-700mA-DC       |
| Electrical info             |                                                          |
| CLASS                       | III                                                      |
| DIM TYPE                    | depending on power supply                                |
| ENERGY CLASS                | G                                                        |
| CERTIFICATES                | CB, ENEC                                                 |
| Lightsource info            |                                                          |
| LIGHTSOURCE NAME            | LED                                                      |
| LIGHTSOURCE                 | LED array 3,9-8,2W / CRI>90 (R9: 55) / 3000K / 385-677lm |
| TM-30 VALUES                | rf: 92 / Rg: 98                                          |
| SDCM                        | SDCM2                                                    |
| RISKGROUP                   | RG2 (threshold 0,6m)                                     |
| LM80                        | L90B10 > 41000                                           |
| BEAMANGLE                   | 52°                                                      |
| LED TECHNICS (LIGHT SOURCE) | 677lm // 8,2W // 83lm/W                                  |
| LED TECHNICS (LUMINAIRE)    | 437lm // 9,4W // 46lm/W                                  |

| Requirements                                       |  |
|----------------------------------------------------|--|
| MOUNTING KIT NIME O.F.A.                           |  |
| LED POWER SUPPLY 350 / 500 / 700mA-DC DIM (Remote) |  |

For detailed installation instructions, please consult the manual : [26415\\_XXX0\\_HAND.pdf](#)

# DELTALIGHT

## NIME II TRIMLESS OK 93052

26415 9330 PRIM

### CEILING COMPATIBILITY

| Ceiling Type                                                                                                       | Mounting Kit                                                                                                                                  |
|--------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
|  <b>System ceiling</b>             |  26410 0010 - MOUNTING KIT NIME O.F.A. <span>Required</span> |
|  <b>Plasterboard</b>               |  26410 0010 - MOUNTING KIT NIME O.F.A. <span>Required</span> |
|  <b>Stucanet</b>                   |  26410 0010 - MOUNTING KIT NIME O.F.A. <span>Required</span> |
|  <b>Concrete + plaster</b>         |  26410 0010 - MOUNTING KIT NIME O.F.A. <span>Required</span> |
|  <b>Lintel + plaster</b>           |  26410 0010 - MOUNTING KIT NIME O.F.A. <span>Required</span> |
|  <b>Hollow-core slab + plaster</b> |  26410 0010 - MOUNTING KIT NIME O.F.A. <span>Required</span> |

### FINISH YOUR SPECIFICATION

#### LED power supplies

#### # of Fixtures



# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the 'I' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




**300 48 350 ED1** LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1

3

Dimtype: 1-10V

Cutout dimension (mm): 30



**300 48 350 ED5** LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

3

Dimtype: DALI

Cutout dimension (mm): 45



**300 48 350 MDL** LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL

3

Dimtype: non-dimmable

Cutout dimension (mm): 30



**300 48 350 WDL** LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL

3

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45

NIME II TRIMLESS OK 93052

26415 9330 PRIM

|                                                                                    |                                                                          |                    |                          |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------|--------------------|--------------------------|
|    | <b>300 48 500 ED1</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1 | 3                  | <input type="checkbox"/> |
|                                                                                    | Dimtype: 1-10V                                                           |                    |                          |
|                                                                                    | Cutout dimension (mm): 30                                                |                    |                          |
|    | <b>300 48 500 ED5</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 | 3                  | <input type="checkbox"/> |
|                                                                                    | Dimtype: DALI                                                            |                    |                          |
|                                                                                    | Cutout dimension (mm): 45                                                |                    |                          |
|    | <b>300 48 500 MDL</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL  | 3                  | <input type="checkbox"/> |
|                                                                                    | Dimtype: non-dimmable                                                    |                    |                          |
|                                                                                    | Cutout dimension (mm): 30                                                |                    |                          |
|    | <b>300 48 500 WDL</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL  | 3                  | <input type="checkbox"/> |
|                                                                                    | Dimtype: WDL = wireless dimmable                                         |                    |                          |
|                                                                                    | Cutout dimension (mm): 45                                                |                    |                          |
|  | <b>300 48 700 ED1</b> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM1 | 3                  | <input type="checkbox"/> |
|                                                                                    | Dimtype: 1-10V                                                           |                    |                          |
|                                                                                    | Cutout dimension (mm): 30                                                |                    |                          |
|  | <b>300 48 700 ED5</b> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5 | 3                  | <input type="checkbox"/> |
|                                                                                    | Dimtype: DALI                                                            |                    |                          |
|                                                                                    | Cutout dimension (mm): 45                                                |                    |                          |
|  | <b>300 48 700 MDL</b> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W MDL  | 3                  | <input type="checkbox"/> |
|                                                                                    | Dimtype: non-dimmable                                                    |                    |                          |
|                                                                                    | Cutout dimension (mm): 30                                                |                    |                          |
|  | <b>300 48 700 WDL</b> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W WDL  | 3                  | <input type="checkbox"/> |
|                                                                                    | Dimtype: WDL = wireless dimmable                                         |                    |                          |
|                                                                                    | Cutout dimension (mm): 45                                                |                    |                          |
|  | <b>300 90 61</b> LED POWER SUPPLY MULTI-POWER DIM6                       | 3   3   3          | <input type="checkbox"/> |
|                                                                                    | Dimtype: mains (phase cut-off) or push button                            |                    |                          |
|                                                                                    | Cutout dimension (mm): 56                                                |                    |                          |
|  | <b>300 90 63</b> LED POWER SUPPLY MULTI-POWER DIM9                       | 6(6)   6(6)   6(4) | <input type="checkbox"/> |
|                                                                                    | Dimtype: 1-10V or DALI or push button                                    |                    |                          |
|                                                                                    | Cutout dimension (mm): 82                                                |                    |                          |










NIME II TRIMLESS OK 93052

26415 9330 PRIM

|                                                                                    |                                                                                                                                |                           |                          |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|---------------------------|--------------------------|
|    | <b>300 90 64</b><br>LED POWER SUPPLY MULTI-POWER DIM7<br>Dimtype: 1-10V or push button<br>Cutout dimension (mm): 72            | 2->4(3)   4(2)   3(1)     | <input type="checkbox"/> |
|    | <b>300 90 67</b><br>LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9<br>Dimtype: 1-10V or DALI or push button              | 3   3                     | <input type="checkbox"/> |
|    | <b>300 90 68</b><br>LED POWER SUPPLY MULTI-POWER DIM5<br>Dimtype: DALI<br>Cutout dimension (mm): 72                            | 4(3)   4(2)   3(1)        | <input type="checkbox"/> |
|    | <b>300 90 69</b><br>LED POWER SUPPLY MULTI-POWER HV DIM9<br>Dimtype: 1-10V or DALI or push button<br>Cutout dimension (mm): 84 | 2->9(10)   9(6)   7(4)    | <input type="checkbox"/> |
|  | <b>300 90 124</b><br>LED POWER SUPPLY MULTI-POWER DIM7<br>Dimtype: 1-10V or push button<br>Cutout dimension (mm): 55           | 2->4(3)   3(2)   2(1)     | <input type="checkbox"/> |
|  | <b>300 90 125</b><br>LED POWER SUPPLY MULTI-POWER MINI DIM5<br>Dimtype: DALI<br>Cutout dimension (mm): 55                      | 4(3)   3(2)   2(1)        | <input type="checkbox"/> |
|  | <b>300 90 135</b><br>LED POWER SUPPLY MULTI-POWER HV<br>Dimtype: non-dimmable<br>Cutout dimension (mm): 90                     | 5->7   4->7   4->6   3->6 | <input type="checkbox"/> |
|  | <b>21012 0010</b><br>LED POWER SUPPLY MULTI POWER<br>Dimtype: non-dimmable<br>Cutout dimension (mm): 50                        | 2->3   3   3              | <input type="checkbox"/> |
|  | <b>21012 0021</b><br>LED POWER SUPPLY MULTI POWER DIM1<br>Dimtype: 1-10V<br>Cutout dimension (mm): 54                          | 4   4   4                 | <input type="checkbox"/> |
|  | <b>21012 0035</b><br>LED POWER SUPPLY MULTI POWER DIM5<br>Dimtype: DALI<br>Cutout dimension (mm): 54                           | 4   4   4                 | <input type="checkbox"/> |


NIME II TRIMLESS OK 93052

26415 9330 PRIM


|                                                                                     |                                                                                                                                             |                    |                          |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|--------------------|--------------------------|
|     | <b>21012 004W</b><br>LED POWER SUPPLY MULTI-POWER WDL<br><br>Dimtype: WDL = wireless dimmable<br><br>Cutout dimension (mm): 84              | 6(6)   5(5)   5(4) | <input type="checkbox"/> |
|     | <b>21012 005W</b><br>LED POWER SUPPLY MULTI-POWER COMPACT WDL<br><br>Dimtype: WDL = wireless dimmable<br><br>Cutout dimension (mm): 54      | 4   4   4          | <input type="checkbox"/> |
|     | <b>21012 0258</b><br>LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8<br><br>Dimtype: mains (phase cut-off)<br><br>Cutout dimension (mm): 50 | 2->2               | <input type="checkbox"/> |
|     | <b>21012 0268</b><br>LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8<br><br>Dimtype: mains (phase cut-off)<br><br>Cutout dimension (mm): 50 | 3->3               | <input type="checkbox"/> |
|   | <b>21012 0278</b><br>LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8<br><br>Dimtype: mains (phase cut-off)<br><br>Cutout dimension (mm): 55 | 2->2   2->2        | <input type="checkbox"/> |
|   | <b>21012 0288</b><br>LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8<br><br>Dimtype: mains (phase cut-off)<br><br>Cutout dimension (mm): 55 | 3->4   3->4        | <input type="checkbox"/> |
|   | <b>21012 0298</b><br>LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8<br><br>Dimtype: mains (phase cut-off)<br><br>Cutout dimension (mm): 48 | 3   3   2          | <input type="checkbox"/> |
|  | <b>21012 0480</b><br>LED POWER SUPPLY 350mA-DC / 17W IP68<br><br>Dimtype: non-dimmable<br><br>Cutout dimension (mm): 60                     | 4(3)               | <input type="checkbox"/> |
|  | <b>21012 0490</b><br>LED POWER SUPPLY 700mA-DC / 30W IP68<br><br>Dimtype: non-dimmable<br><br>Cutout dimension (mm): 60                     | 3(1)               | <input type="checkbox"/> |
|  | <b>21012 0500</b><br>LED POWER SUPPLY 500mA-DC / 24W IP68<br><br>Dimtype: non-dimmable<br><br>Cutout dimension (mm): 60                     | 4(2)               | <input type="checkbox"/> |

NIME II TRIMLESS OK 93052

26415 9330 PRIM

|                                                                                  |                                                                      |   |                          |
|----------------------------------------------------------------------------------|----------------------------------------------------------------------|---|--------------------------|
|  | <b>21032 0295</b> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 | 3 | <input type="checkbox"/> |
|                                                                                  | Dimtype: DALI                                                        |   |                          |
|                                                                                  | Cutout dimension (mm): 30                                            |   |                          |
|  | <b>21032 0305</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 | 3 | <input type="checkbox"/> |
|                                                                                  | Dimtype: DALI                                                        |   |                          |
|                                                                                  | Cutout dimension (mm): 30                                            |   |                          |
|  | <b>21032 0315</b> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5 | 3 | <input type="checkbox"/> |
|                                                                                  | Dimtype: DALI                                                        |   |                          |
|                                                                                  | Cutout dimension (mm): 30                                            |   |                          |

Mounting kits

|                                                                                   |                                            |  |                          |
|-----------------------------------------------------------------------------------|--------------------------------------------|--|--------------------------|
|  | <b>26410 0010</b> MOUNTING KIT NIME O.F.A. |  | <input type="checkbox"/> |
|                                                                                   | Cutout dimension (mm): 127                 |  |                          |

Notes: