



## COMPO S IP44 93020

9 15743 9320 B


AVAILABLE IN

**BLACK** 9 15743 9320 B

**CHROMED** 9 15743 9320 C

**DARK CHROMED** 9 15743 9320 DC

**WHITE** 9 15743 9320 W

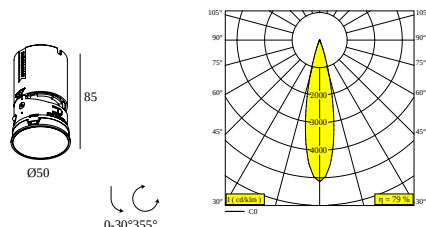

[View on website](#)



### General info

|                                           |                                     |
|-------------------------------------------|-------------------------------------|
| <b>LOCATION</b>                           | indoor-outdoor                      |
| <b>INSTALLATION</b>                       | Ceiling Recessed                    |
| <b>CUTOUT SHAPE/SIZE (MM)</b>             | round - 90                          |
| <b>RECESSED DEPTH (MM)</b>                | 85                                  |
| <b>THICKNESS OF MOUNTING SURFACE (MM)</b> | max.25                              |
| <b>INGRESS PROTECTION</b>                 | IP44/20                             |
| <b>WEIGHT (KG)</b>                        | 0.136                               |
| <b>ADJUSTABILITY</b>                      | 0° to 30° swiveling, 355° rotatable |

### Electrical info

|                     |                           |
|---------------------|---------------------------|
| <b>CLASS</b>        | III                       |
| <b>DIM TYPE</b>     | depending on power supply |
| <b>ENERGY CLASS</b> | F                         |

### Lightsource info

|                                    |                                         |
|------------------------------------|-----------------------------------------|
| <b>LIGHTSOURCE NAME</b>            | LED                                     |
| <b>LIGHTSOURCE</b>                 | LED array 6,4W / CRI>90 / 3000K / 495lm |
| <b>SDCM</b>                        | SDCM2                                   |
| <b>RISKGROUP</b>                   | RG1                                     |
| <b>BEAMANGLE</b>                   | 20°                                     |
| <b>LED TECHNICS (LIGHT SOURCE)</b> | 495lm // 6,4W // 120lm/W                |
| <b>LED TECHNICS (LUMINAIRE)</b>    | 393lm // 7,4W // 53lm/W                 |

### Requirements

LED POWER SUPPLY 350 mA - DC

### Accessories

COMPO S HONEYCOMB SINGLE USE B  
COMPO S LINEAR SPREAD LENS  
COMPO S SPREAD LENS  
COMPO S SOFTENING LENS  
COMPO S GLASS SBL

For detailed installation instructions, please consult the manual : [9\\_15743\\_XXX0\\_HAND.pdf](#)

# DELTALIGHT

## COMPO S IP44 93020

9 15743 9320 B

### CEILING COMPATIBILITY

| Ceiling Type                                                                     | Mounting Kit                                                                                                                 |          |
|----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|----------|
|  |  15710 0010 - MOUNTING KIT COMPO S TRIM     | Required |
|                                                                                  |  15710 0040 - MOUNTING KIT COMPO S TRIMLESS | Required |
|  |  15710 0010 - MOUNTING KIT COMPO S TRIM     | Required |
|                                                                                  |  15710 0040 - MOUNTING KIT COMPO S TRIMLESS | Required |
|  |  15710 0010 - MOUNTING KIT COMPO S TRIM     | Required |
|                                                                                  |  15710 0040 - MOUNTING KIT COMPO S TRIMLESS | Required |

### FINISH YOUR SPECIFICATION

#### LED Power supply

#### # of Fixtures



# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current

|                   |                                                 |       |                      |
|-------------------|-------------------------------------------------|-------|----------------------|
| <b>15710 3100</b> | LED POWER SUPPLY 18W NO DIM 1400mA              | 1->4  | <input type="text"/> |
| <b>15710 3300</b> | LED POWER SUPPLY MULTIPOWER 15W NO DIM 350mA    | 1->2  | <input type="text"/> |
| <b>15710 3800</b> | LED POWER SUPPLY MULTIPOWER 10W DIM8 350mA      | 1     | <input type="text"/> |
| <b>15710 4500</b> | LED POWER SUPPLY MULTIPOWER 12W DIM1 350mA      | 1     | <input type="text"/> |
| <b>15710 5000</b> | LED POWER SUPPLY MULTIPOWER 55W DALI DT6 1400mA | 1->13 | <input type="text"/> |
| Dimtype: DALI     |                                                 |       |                      |
| <b>15710 5300</b> | LED POWER SUPPLY MULTIPOWER 12W DALI DT6 350mA  | 1     | <input type="text"/> |
| Dimtype: DALI     |                                                 |       |                      |

#### Mounting kits



**15710 0010 B** MOUNTING KIT COMPO S TRIM B

Cutout dimension (mm): 55

**15710 0010 W** MOUNTING KIT COMPO S TRIM W

## COMPO S IP44 93020

9 15743 9320 B



**15710 0040** MOUNTING KIT COMPO S TRIMLESS

☐

Cutout dimension (mm): 55

### Light altering devices

**15710 0100 B** COMPO S HONEYCOMB SINGLE USE B

☐

**15710 0110** COMPO S LINEAR SPREAD LENS

☐

Cutout dimension (mm): 26,5

**15710 0120** COMPO S SPREAD LENS

☐

Cutout dimension (mm): 26,5

**15710 0130** COMPO S SOFTENING LENS

☐

Cutout dimension (mm): 26,5

**15710 0140** COMPO S GLASS SBL

☐

Cutout dimension (mm): 26,5

Notes: