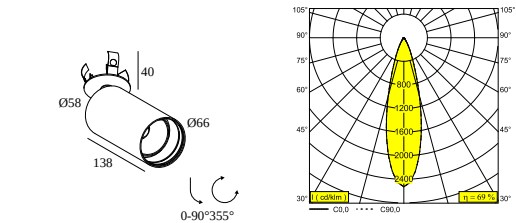




SPY 66 CLIP 93030

24621 9320 FW

AVAILABLE IN
BLACK-BLACK 24621 9320 B-B
FULL WHITE 24621 9320 FW
WHITE-WHITE 24621 9320 W-W



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Semi-recessed
CUTOUT SHAPE/SIZE (MM)	round - 51
RECESSED DEPTH (MM)	40
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.6
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-30° EXCLLED POWER SUPPLY 350-700mA-DC Optional REFLECTORS 18° & 45° available
Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, LCA
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 11,6-25W / CRI>90 (R9: 52) / 3000K / 1524-2811lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	2811lm // 25W // 112lm/W
LED TECHNICS (LUMINAIRE)	1937lm // 28,8W // 67lm/W

Remarks
GLASS / LENS 57: max. 500mA

Requirements
SPY 66 TUBE
LED POWER SUPPLY 350 / 500 / 700mA-DC DIM

Options
MOUNTING KIT FLUSH SPY

Accessories
HONEYCOMB 57
SPREAD LENS 57
Delta Light NV may revise the information and technical data at any time without notice. Version: 29/04/2026

DELTALIGHT

SPY 66 CLIP 93030

24621 9320 FW

LINEAR SPREAD LENS 57
SOFTENING LENS 57
GLASS SBL 57

For detailed installation instructions, please consult the manual : [24621_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Plasterboard	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Stucanet	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Wood	-
 Concrete	-
 Concrete + plaster	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Lintel + plaster	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Hollow-core slab	-
 Hollow-core slab + plaster	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Stretched ceiling	-

FINISH YOUR SPECIFICATION

LED power supplies

of Fixtures













of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the 'I' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current

DELTALIGHT

SPY 66 CLIP 93030











24621 9320 FW

	300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1	1	☐
	Dimtype: 1-10V		
	Cutout dimension (mm): 30		
	300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	1	☐
	Dimtype: DALI		
	Cutout dimension (mm): 45		
	300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL	1	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 30		
	300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL	1	☐
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 45		
	300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1	1	☐
	Dimtype: 1-10V		
	Cutout dimension (mm): 30		
	300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	1	☐
	Dimtype: DALI		
	Cutout dimension (mm): 45		
	300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL	1	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 30		
	300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL	1	☐
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 45		
	300 48 700 ED1 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM1	1	☐
	Dimtype: 1-10V		
	Cutout dimension (mm): 30		
	300 48 700 ED5 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5	1	☐
	Dimtype: DALI		
	Cutout dimension (mm): 45		

DELTALIGHT

SPY 66 CLIP 93030











24621 9320 FW

	300 48 700 MDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W MDL	1	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 30		
	300 48 700 WDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W WDL	1	☐
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 45		
	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6	1 1 1	☐
	Dimtype: mains (phase cut-off) or push button		
	Cutout dimension (mm): 56		
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	2(2) 2(2) 2(1)	☐
	Dimtype: 1-10V or DALI or push button		
	Cutout dimension (mm): 82		
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7	1(1) 1(0) 1(0)	☐
	Dimtype: 1-10V or push button		
	Cutout dimension (mm): 72		
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9	1 - 1	☐
	Dimtype: 1-10V or DALI or push button		
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1(1) 1(0) 1(0)	☐
	Dimtype: DALI		
	Cutout dimension (mm): 72		
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	3(3) 3(2) 2(1)	☐
	Dimtype: 1-10V or DALI or push button		
	Cutout dimension (mm): 84		
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	1(1) 1(0) 0	☐
	Dimtype: 1-10V or push button		
	Cutout dimension (mm): 55		
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	1(1) 1(0) 0	☐
	Dimtype: DALI		
	Cutout dimension (mm): 55		

DELTALIGHT

SPY 66 CLIP 93030






24621 9320 FW

	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	2->2 2 2	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	1 1 1	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	1 1 1	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	1 1 1	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	2(2) 2(2) 2(1)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	1 1 1	☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	1 1	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 48	1 1 0	☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68 Dimtype: non-dimmable Cutout dimension (mm): 60	1(1)	☐


DELTALIGHT

SPY 66 CLIP 93030


24621 9320 FW

	21012 0490 LED POWER SUPPLY 700mA-DC / 30W IP68	1(0)	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 60			
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	1(0)	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 60			
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	1	☐
Dimtype: DALI			
Cutout dimension (mm): 30			
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	1	☐
Dimtype: DALI			
Cutout dimension (mm): 30			
	21032 0315 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5	1	☐
Dimtype: DALI			
Cutout dimension (mm): 30			

Mounting kits

	414 90 01 MOUNTING KIT FLUSH SPY	☐
Cutout dimension (mm): 83		


Light altering devices

	24611 0150 B HONEYCOMB 57 SINGLE USE B	☐
	24611 0160 GLASS SBL 57	☐


DELTALIGHT

SPY 66 CLIP 93030


24621 9320 FW




24611 0170 LINEAR SPREAD LENS 57

☐

24611 0190 SOFTENING LENS 57

☐


24611 0200 SPREAD LENS 57

☐

24611 0210 B HONEYCOMB 57 DOUBLE USE B

☐

Finish your product



24611 0100 B SPY 66 TUBE B

☐

24611 0100 FBR SPY 66 TUBE FBR

☐

24611 0100 FG SPY 66 TUBE FG

☐

24611 0100 GC SPY 66 TUBE GC

☐

24611 0100 W SPY 66 TUBE W

☐

Replaceable reflector / lens



24611 0220 SPY 66 REFLECTOR 18°

☐

DELTALIGHT

SPY 66 CLIP 93030

24621 9320 FW



24611 0230 SPY 66 REFLECTOR 30°

☐

24611 0240 SPY 66 REFLECTOR 45°

☐

Notes: