


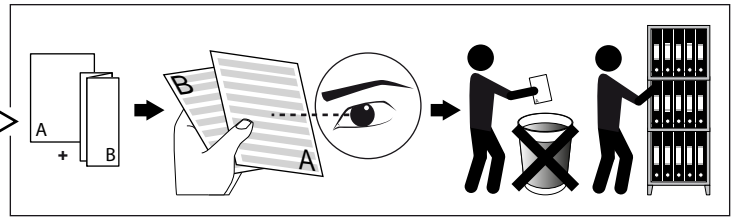



**SUPERNOVA FLAT 65 PRISMATIC**


DEEL  
PARTIE  
TEIL  
PART  
PARTE  
PARTE **A**

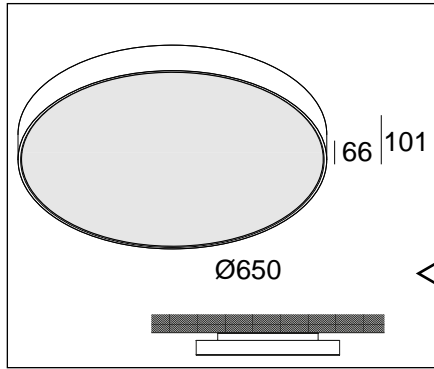

**SURFACE FIXATION**

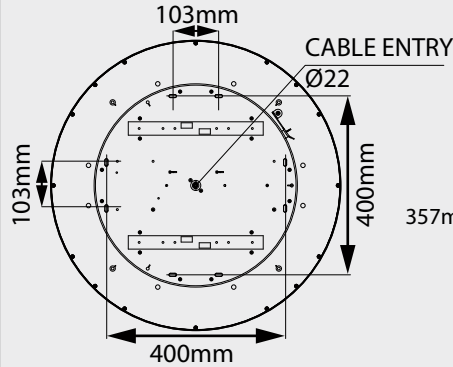

**SUSPENDED FIXATION**

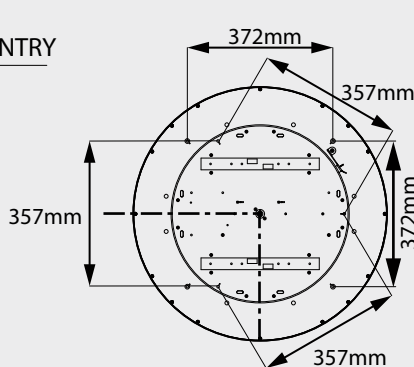

**GENERAL OPTIONS**

Central rod susp. Supernova flat 1 m	274 97 10
Suspension set 25 3m.	328 25 43

**OPTIONS SUSPENDED FIXATION**


Cable Base R	203 99 55
Cable Base S	203 99 56
Coverset R 100	204 00 100
Coverset R 90	204 00 90
Coverset R 62	204 00 62
Coverset S 62	204 62 62
Coverset S 80	204 80 80
Coverset S 90	204 90 90

**IP20**

Beb ermd tegen a s e w orwerpen die groter zjn dan 12 mm  
 Protégé o ntre les objets e lides de plus de 12 mm  
 Geb ützt gegen Fes b rper größer als 12 mm  
 Protet ed agains e lid objet s greater than 12 mm  
 Protegido o ntra objetos e lidos a periores a 12 mm  
 Protetto o ntro oggetti e lidi più grandi di 12 mm

Voorz en a n aardinga anb uiting  
 A e cmie à la terre  
 Aug erüs tet mit Erdunga nb lus  
 Prov ded with grounding  
 Con la toma de tierra  
 Con prea a terra

**SURFACE MOUNTING**

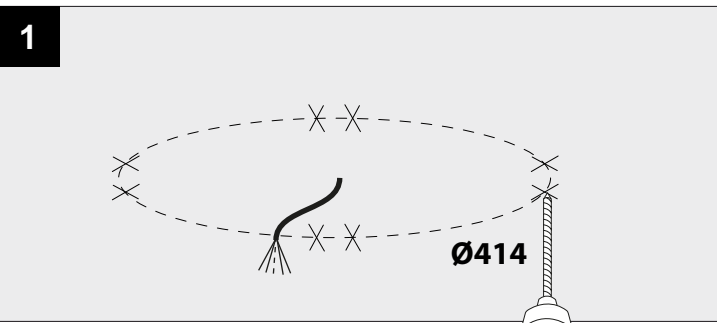


**E**

This product contains a light source of energy efficiency class E  
 本产品包含能效等级为 E 的光源  
 Этот артикул содержит источник света с энергоэффективностью класса E  
 Dit product bevat een verlichtingsbron van energie-efficiëntieklasse E  
 Ce produit contient une source d'éclairage de classe d'efficacité énergétique E  
 Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E  
 Este producto contiene una fuente de iluminación de clase de eficiencia energética E  
 Questo prodotto contiene una fonte di illuminazione in classe di efficienza energetica E  
 يحتوي هذا المنتج على مصدر ضوء ذو كفاءة الطاقة E

**D**

This product contains a light source of energy efficiency class D at 3000K, CR190  
 本产品包含能效等级为 D 3000K · CR190 的光源  
 Этот артикул содержит источник света с энергоэффективностью класса D, 3000K, CR190  
 -190K, K 0002 في D كفاءة الطاقة  
 Dit product bevat een verlichtingsbron van energie-efficiëntieklasse D bij 3000K, CR190  
 Ce produit contient une source d'éclairage de classe d'efficacité énergétique D pour 3000K, CR190  
 Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D bei 3000K, CR190  
 Este producto contiene una fuente de iluminación de clase de eficiencia energética D en 3000K, CR190  
 Questo prodotto contiene una fonte di illuminazione in classe di efficienza energetica D a 3000K, CR190



**PENDENT MOUNTING**

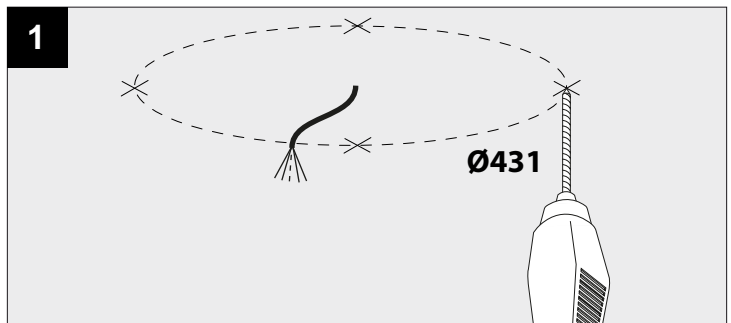


**USE ACCESSORIES FROM SUSPENSION SET**

**SURFACE MOUNTING**

**2**

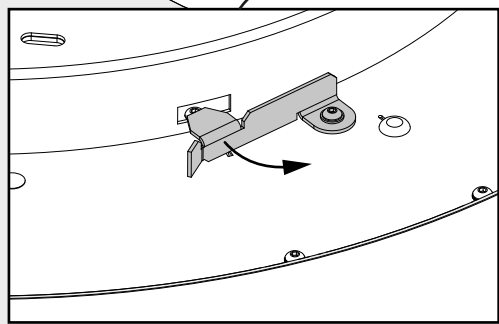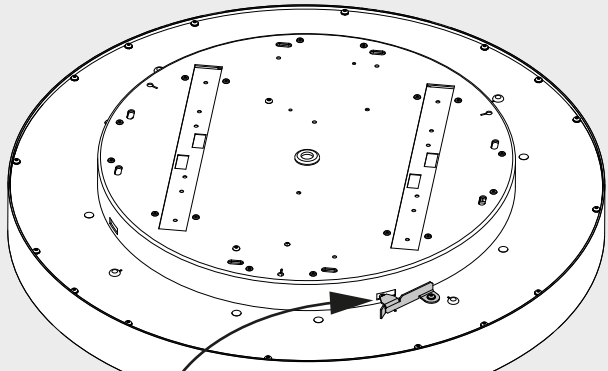


**3**

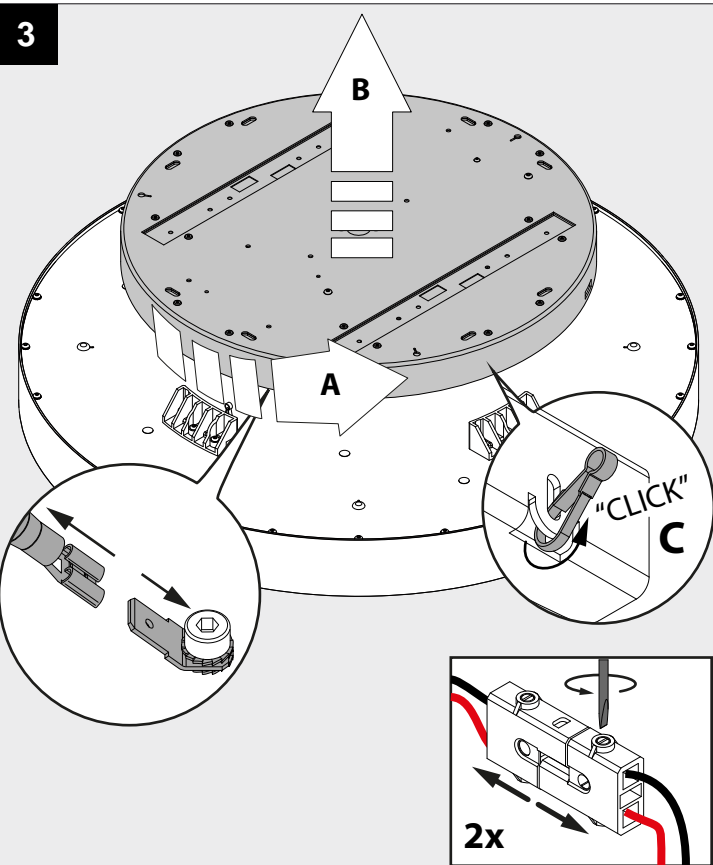


**PENDENT MOUNTING**


**2**

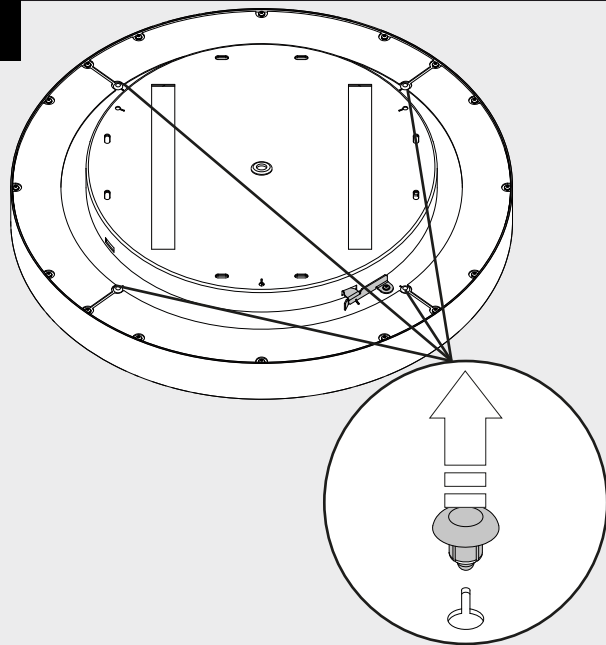

**3**

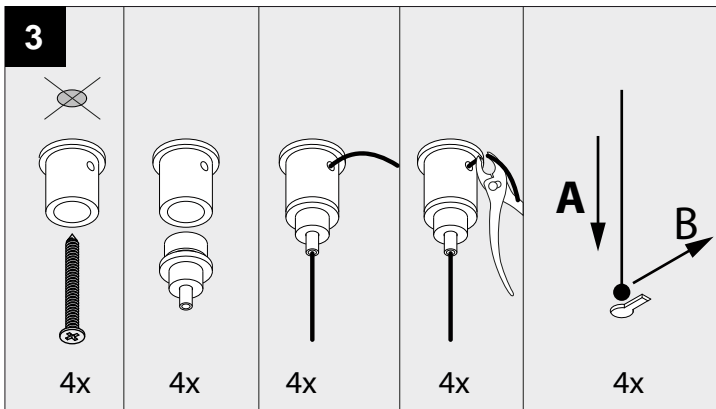


**4**

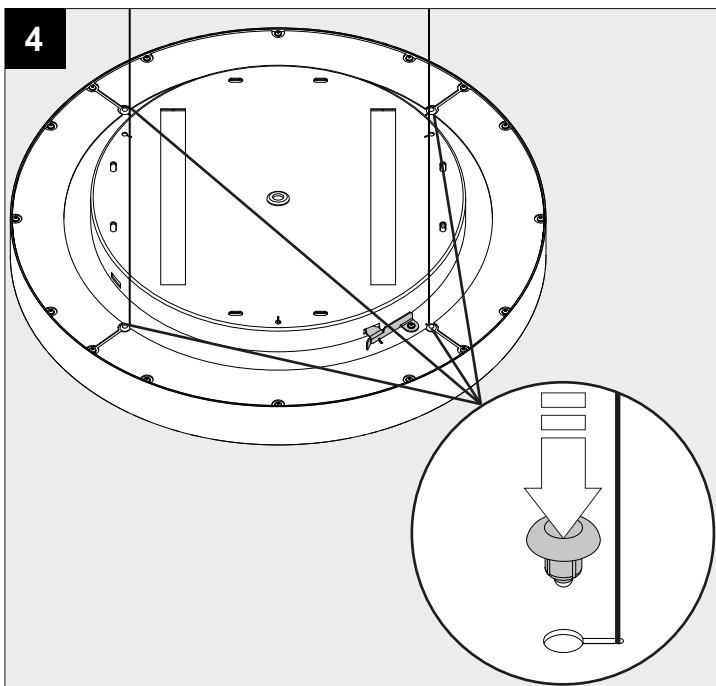

Replaceable (LED only) light source and control gear by a professional  
 (仅针对LED) 光源及其控制设备只能由专业人员更换  
 (для СВЕТОДИОДНЫХ светильников) замена источника света и блока питания может быть произведена только квалифицированным специалистом

Verlichtingsbron (enkel LED) en voorschakelapparaat kan enkel vervangen worden door een professional  
 La source d'éclairage (uniquement LED) et le ballast ne peut être remplacé que par un professionnel  
 Die Lichtquelle (nur LED) und Vorschaltgerät kann nur von einem Fachmann ausgetauscht werden  
 La fuente de iluminación (solo LED) solo puede ser reemplazada por un profesional  
 La sorgente luminosa (LED) e l'alimentatore possono essere sostituiti solo da un professionista.


**SURFACE MOUNTING**

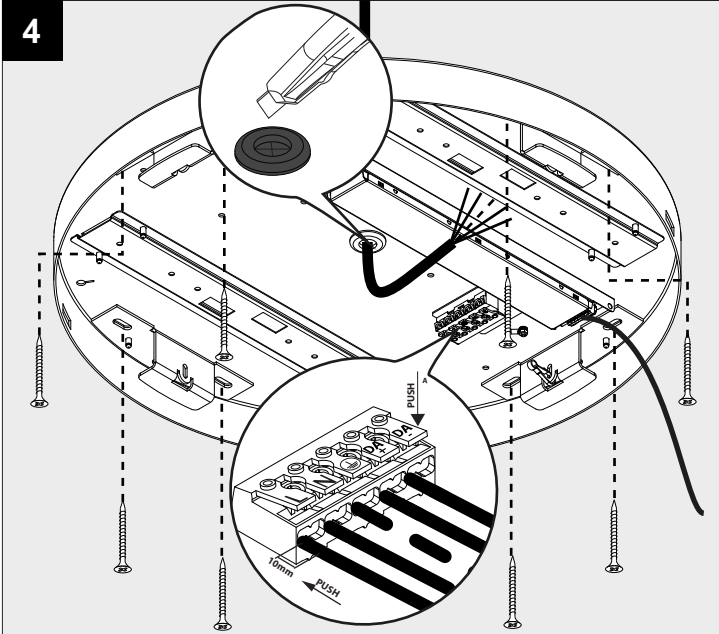




DIP SWITCH position / Set both power supplies on a equal output ( Only suitable for downlight )

SEC	4	3	2	1	SEC	4	3	2	1
350mA	-	-	-	-	1000mA	ON	-	-	ON
450mA	ON	-	-	-	1050mA	-	ON	-	ON
550mA	-	ON	-	-	1150mA	ON	ON	-	ON
650mA	-	-	ON	-	1250mA	ON	-	ON	ON
750mA	ON	-	ON	-	1330mA	-	ON	ON	ON
830mA	-	ON	ON	-	1400mA	ON	ON	ON	ON
930mA	ON	ON	ON	-					

Adapt both power supplies with the same settings.

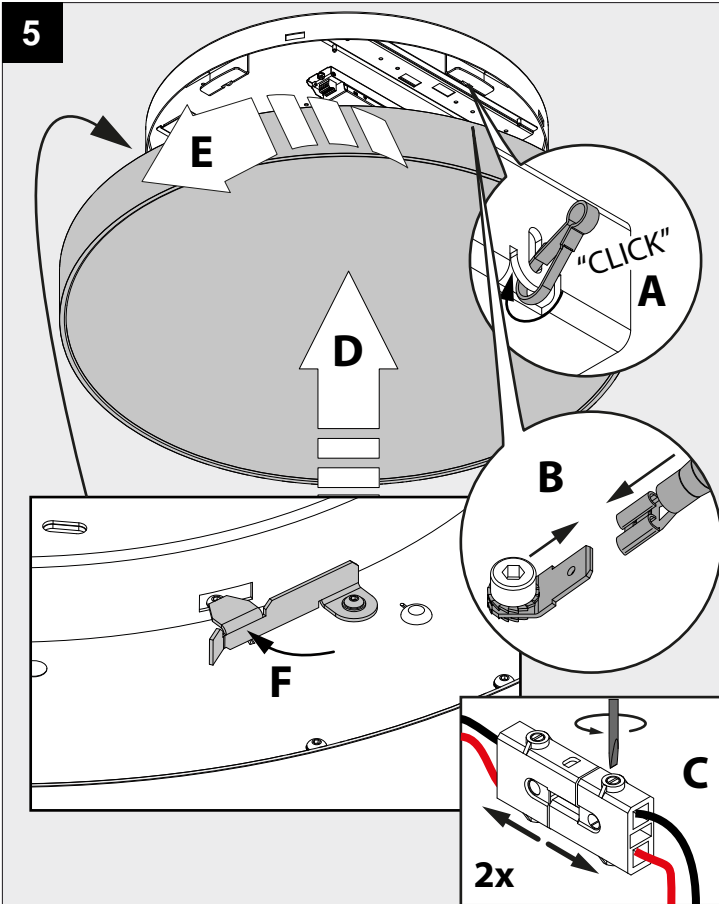


**PENDENT MOUNTING**

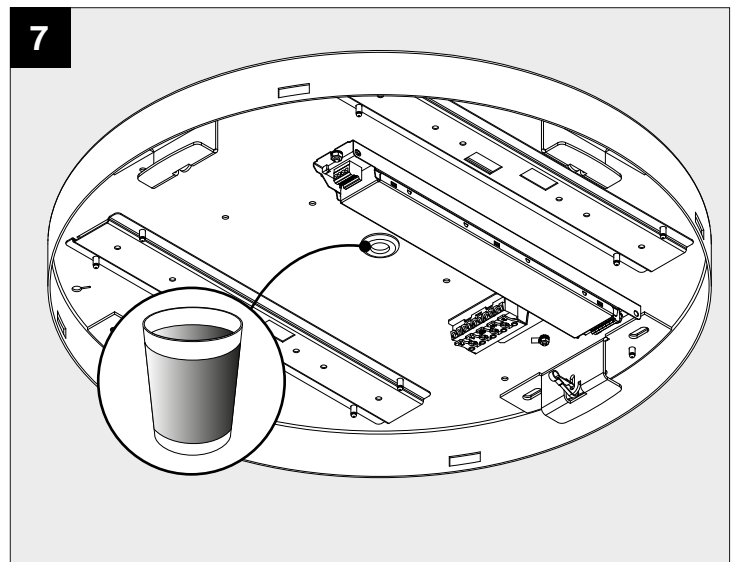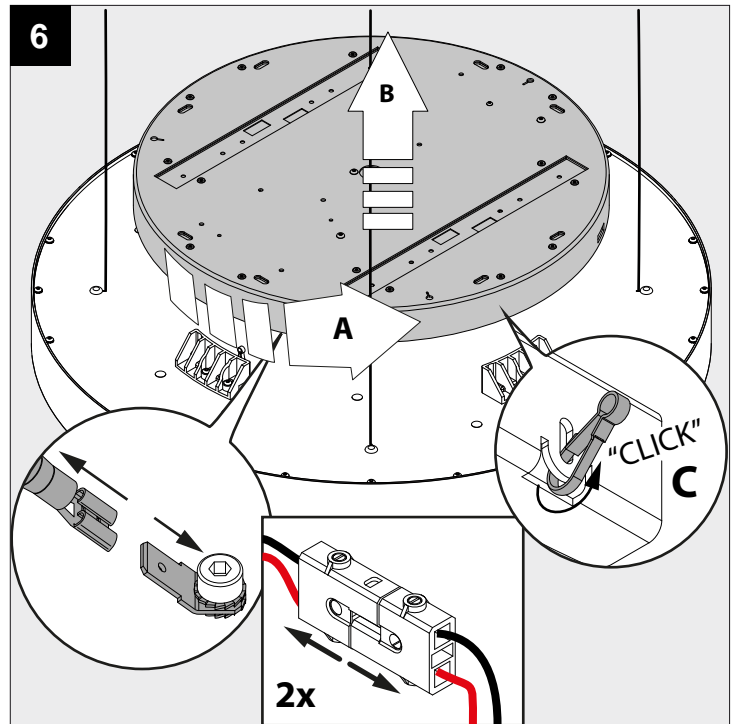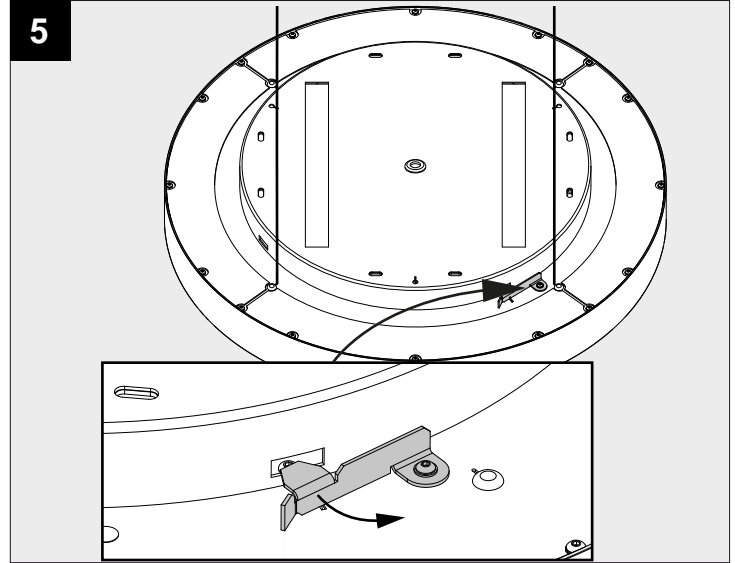

**SURFACE MOUNTING**

6

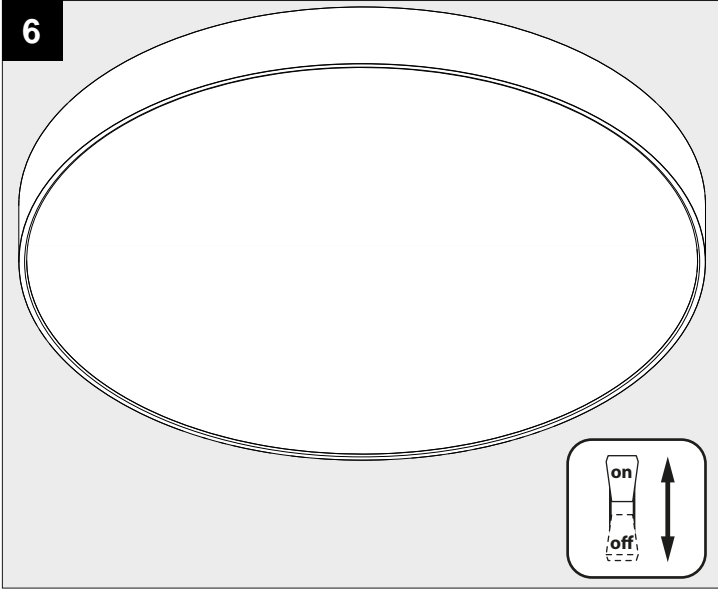

De verlichtingsbron van dit verlichtingstoestel zal enkel door de fabrikant of door de fabrikant aangestelde installateur vervangen worden.

La source lumière de cet appareil ne sera remplacée que par l'entrepreneur ou par un agent reconnu.

Das enthaltene Leuchtmittel sollte nur durch entsprechendes Fachpersonal ersetzt werden.


The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent.

La fuente de iluminación que tiene esta luminaria sólo puede remplazarse por el fabricante o por un instalador autorizado.


La sorgente luminosa incorporata in questo apparecchio può essere sostituita solo dal produttore, da un suo centro assistenza oppure da una persona in possesso della necessaria abilitazione.

**PENDENT MOUNTING**

8

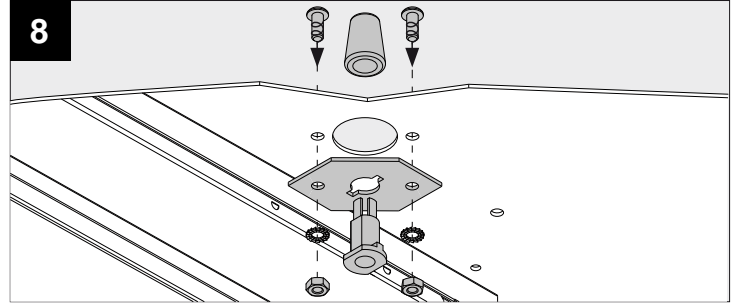

9

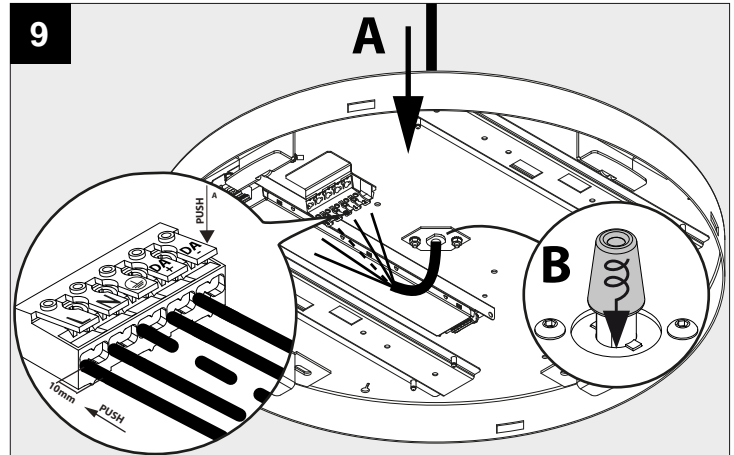


DIP SWITCH position / Set both power supplies on a equal output ( Only suitable for downlight )

SEC	4	3	2	1	SEC	4	3	2	1
350mA	-	-	-	-	1000mA	ON	-	-	ON
450mA	ON	-	-	-	1050mA	-	ON	-	ON
550mA	-	ON	-	-	1150mA	ON	ON	-	ON
650mA	-	-	ON	-	1250mA	ON	-	ON	ON
750mA	ON	-	ON	-	1330mA	-	ON	ON	ON
830mA	-	ON	ON	-	1400mA	ON	ON	ON	ON
930mA	ON	ON	ON	-					

**Adapt both power supplies with the same settings.**

10

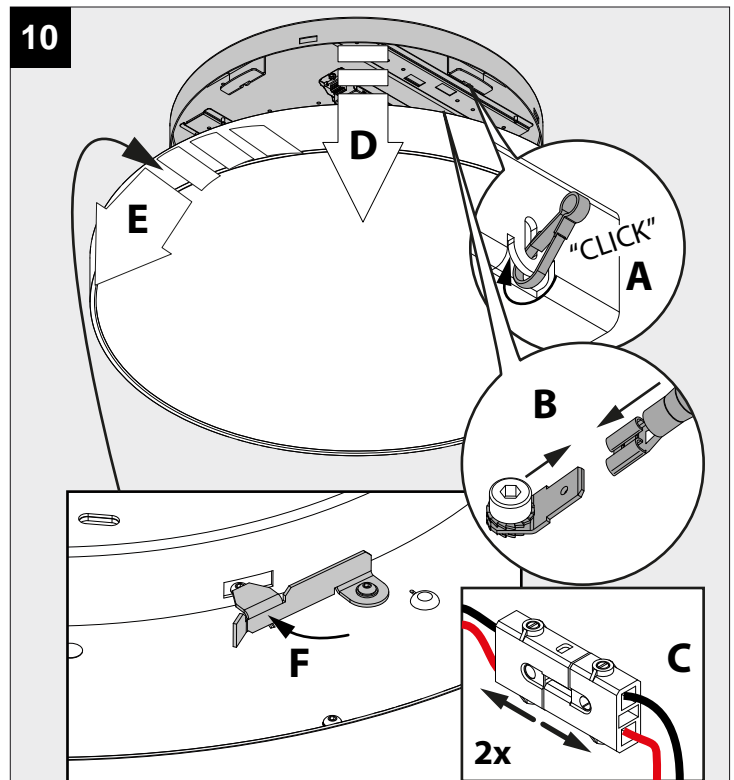

## SURFACE MOUNTING

The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 0,284 m is not expected.

照明设备安装的位置应避免距离短于 0,284 厘米的凝视

Светильник должен быть расположен таким образом, чтобы не предполагался длительный прямой зрительный контакт со светильником с расстояния ближе 0,284м.

يجب وضع المصباح بحيث يحدد لفترة طويلة في المصباح عند المسافة أقرب من 0,284م غير متوقع.

Het toestel dient op een plaats te worden gemonteerd van waaruit langdurig staren in de lichtbron, vanop een afstand van 0,284m, vermeden wordt.

Le luminaire doit être positionné afin d'éviter tous contacts prolongés visuels à moins de 0,284m.

Die Leuchte soll so montiert werden, dass ein längerer direkter Augekontakt mit der LED aus einer Distanz von weniger als 0,284m vermieden wird.

Per evitare il rischio di danni alla vista, l'apparecchio deve essere montato in modo che non si possa guardare direttamente la sorgente luminosa da una distanza inferiore a 0,284m per un tempo prolungato.

La luminaria se tiene que instalar de tal forma que no se pueda mirar fijamente la fuente de luz por un tiempo prolongado a una distancia de menos de 0,284m, ya que pueda dañar los ojos



### MORE INFO PHOTOBIOLOGICAL SAFETY


[https://www.deltalight.com/downloads/Photobiological\\_safety.pdf](https://www.deltalight.com/downloads/Photobiological_safety.pdf)



 SCAN ME

## PENDENT MOUNTING

11

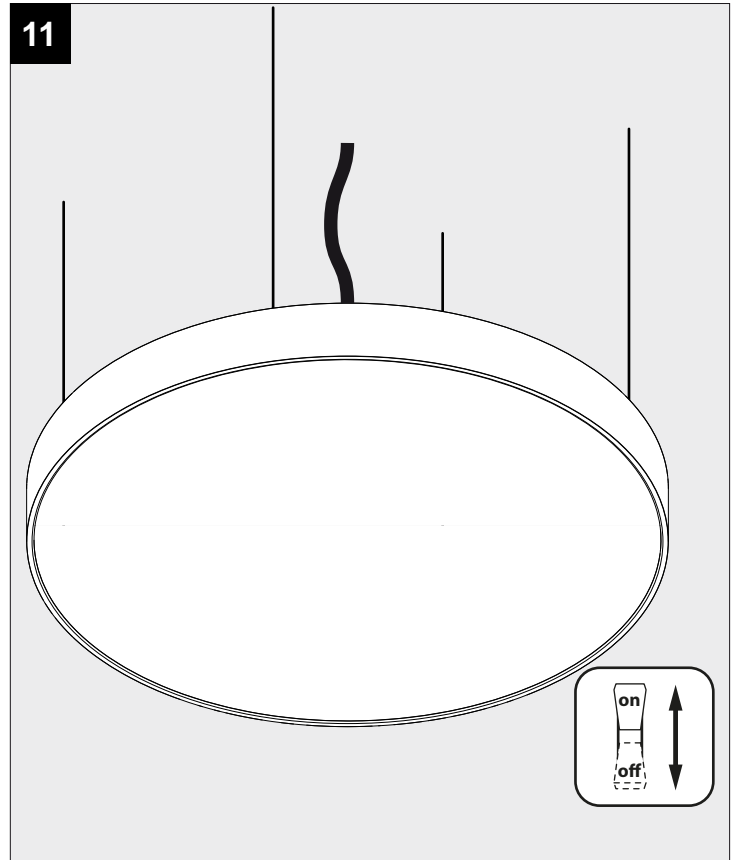

De verlichtingsbron van dit verlichtingstoestel zal enkel door de fabrikant of door de fabrikant aangestelde installateur vervangen worden.

La source lumière de cet appareil ne sera remplacée que par l'entreprise ou par un agent reconnu.

Das enthaltene Leuchtmittel sollte nur durch entsprechendes Fachpersonal ersetzt werden.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent.

La fuente de iluminación que tiene esta luminaria sólo puede remplazarse por el fabricante o por un instalador autorizado.

La sorgente luminosa incorporata in questo apparecchio può essere sostituita solo dal produttore, da un suo centro assistenza oppure da una persona in possesso della necessaria abilitazione.