



LED POWER SUPPLY 700mA-DC /
38W DIM5

300 90 131

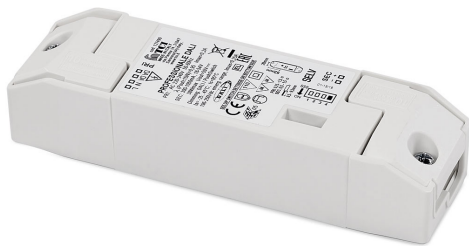

[View on website](#)



Image may differ from the actual product

General info	
LOCATION	indoor
CUTOUT SHAPE/SIZE (MM)	round - 54
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.241
INFORMATION	CURRENT CONTROLLED OUTPUT: 700mA / 38W / 54V-DC $\lambda > 0,9$ Inrush current : 5A - 50µs @ 230V-AC Max. 50 units on circuit breaker B 16A
Electrical info	
CLASS	II
DIM TYPE	DALI

For detailed installation instructions, please consult the manual : [300_90_131_HAND.pdf](#)

WHERE USED

321 107 92	SUPERLOOP HC 70 SBL 927
321 107 93	SUPERLOOP HC 70 SBL 930
321 109 92	SUPERLOOP HC 90 SBL 927
321 109 93	SUPERLOOP HC 90 SBL 930
321 207 93	SUPERLOOP HC 70 SPR 930
321 209 93	SUPERLOOP HC 90 SPR 930
321 407 92	SUPERLOOP VR 70 SBL 927
321 407 93	SUPERLOOP VR 70 SBL 930
321 409 92	SUPERLOOP VR 90 SBL 927
321 409 93	SUPERLOOP VR 90 SBL 930
321 507 92	SUPERLOOP VC 70 SBL 927
321 507 93	SUPERLOOP VC 70 SBL 930
321 509 92	SUPERLOOP VC 90 SBL 927
321 509 93	SUPERLOOP VC 90 SBL 930
20561 9200	SUPERLOOP PLUS HC 70 SBL 927
20561 9300	SUPERLOOP PLUS HC 70 SBL 930
20562 9200	SUPERLOOP PLUS HC 90 SBL 927
20562 9300	SUPERLOOP PLUS HC 90 SBL 930
20570 9200	SUPERLOOP HC SBL OVAL S 927
20570 9300	SUPERLOOP HC SBL OVAL S 930
20572 9200	SUPERLOOP SLIM IN 70 SBL 927

DELTALIGHT

LED POWER SUPPLY 700mA-DC / 38W DIM5

300 90 131

20572 9300	SUPERLOOP SLIM IN 70 SBL 930
20573 9200	SUPERLOOP SLIM IN 90 SBL 927
20573 9300	SUPERLOOP SLIM IN 90 SBL 930
20576 9200	SUPERLOOP SLIM OUT 70 SBL 927
20576 9300	SUPERLOOP SLIM OUT 70 SBL 930
20577 9200	SUPERLOOP SLIM OUT 90 SBL 927
20577 9300	SUPERLOOP SLIM OUT 90 SBL 930
20580 9200	SUPERLOOP SLIM DOWN 70 SBL 927
20580 9300	SUPERLOOP SLIM DOWN 70 SBL 930

Notes: