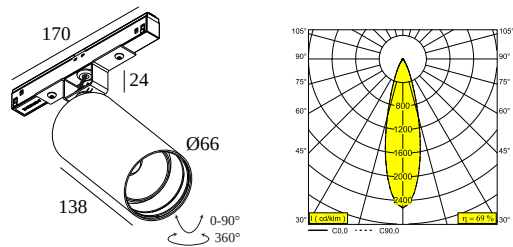




M20/M26H - SPY 66 92730 DIM5
23328 9225 W

AVAILABLE IN
BLACK 23328 9225 B
WHITE 23328 9225 W



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.6
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-30° EXCL.LED POWER SUPPLY 48V-DC Optional REFLECTORS 18° & 45° available

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, EPD, LCA

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 25W / CRI>90 (R9: 60) / 2700K / 2688lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	2688lm // 25W // 108lm/W
LED TECHNICS (LUMINAIRE)	1852lm // 28,8W // 64lm/W

Remarks
Take a look at our MAGNETIC PROFILES movie

Requirements
SPY 66 TUBE LED POWER SUPPLY 48V-DC

Accessories
HONEYCOMB 57

For detailed installation instructions, please consult the manual : [23328_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION


LED power supplies		# of Fixtures
# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
5510090 300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN Dimtype: non-dimmable	3	
63114125 300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN Dimtype: non-dimmable	8	
1729830 21012 0230 LED POWER SUPPLY 48V-DC / 100W Dimtype: non-dimmable Cutout dimension (mm): 40	3	
2239230 21012 0240 LED POWER SUPPLY 48V-DC / 200W Dimtype: non-dimmable Cutout dimension (mm): 40	7	
Light altering devices		
14057 24611 0150 B HONEYCOMB 57 SINGLE USE B		

DELTALIGHT

M20/M26H - SPY 66 92730 DIM5

23328 9225 W

Finish your product



24611 0100 B SPY 66 TUBE B

☐

24611 0100 FBR SPY 66 TUBE FBR

☐

24611 0100 FG SPY 66 TUBE FG

☐

24611 0100 GC SPY 66 TUBE GC

☐

24611 0100 W SPY 66 TUBE W

☐

Replaceable reflector / lens



24611 0220 SPY 66 REFLECTOR 18°

☐

24611 0230 SPY 66 REFLECTOR 30°

☐

24611 0240 SPY 66 REFLECTOR 45°

☐

COMPATIBLE COMPOSABLES

SHIFTLINE M26H + SBL

Available Colours





30411 9205 SHIFTLINE M26H + SBL 2m DIM5



DELTALIGHT





M20/M26H - SPY 66 92730 DIM5

23328 9225 W

	30411 9305 SHIFTLINE M26H + SBL 2m DIM5	
	30412 9205 SHIFTLINE M26H + SBL 3m DIM5	
	30412 9305 SHIFTLINE M26H + SBL 3m DIM5	
	30413 9205 SHIFTLINE M26H + SBL 4m DIM5	
	30413 9305 SHIFTLINE M26H + SBL 4m DIM5	

SHIFTLINE M26H profile

Available Colours





	23359 0000 SLM26H - PROFILE	
	23359 0010 SLM26H - PROFILE 1m	
	23359 0020 SLM26H - PROFILE 2m	
	23359 0030 SLM26H - PROFILE 3m	

DELTALIGHT

M20/M26H - SPY 66 92730 DIM5

23328 9225 W

SPLITLINE M20 ST profile		Available Colours
	23397 0000 SPM20 ST - PROFILE	 
	23397 0020 SPM20 ST - PROFILE 2m	 
	23397 0030 SPM20 ST - PROFILE 3m	 

SPLITLINE M20 profile		Available Colours
	420 20 10 00 SPM20 - PROFILE 1m	
	420 20 20 00 SPM20 - PROFILE 2m	
	420 20 30 00 SPM20 - PROFILE 3m	
	23301 0000 SPM20 - PROFILE B	

Notes: