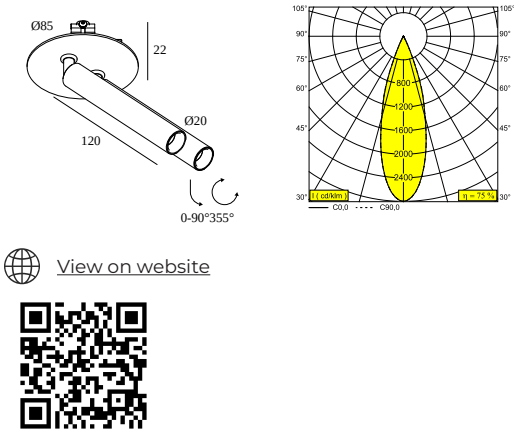




SPY 20 L 2 AIR 93030

27218 9320 W-B

AVAILABLE IN
BLACK-BLACK 27218 9320 B-B
FLEMISH BRONZE-BLACK 27218 9320 FBR-B
FLEMISH GOLD-BLACK 27218 9320 FG-B
GOLD COLORED-BLACK 27218 9320 GC-B
WHITE-BLACK 27218 9320 W-B



[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - Ø KIT
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.2
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-30° EXCLLED POWER SUPPLY 350-1050mA-DC SPY 20 TUBE B included
Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	2 x (LED array 1-3,1W / CRI>90 (R9: 60) / 3000K / 131-334lm)
TM-30 VALUES	rf: 92 / Rg: 99
SDCM	SDCM3
RISKGROUP	RG2
LM80	L90B10 > 150000
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	668lm // 6,2W // 109lm/W
LED TECHNICS (LUMINAIRE)	503lm // 7,1W // 71lm/W
Requirements	

MOUNTING KIT AIR 104
LED POWER SUPPLY 350 / 500 / 700 / 1050mA-DC DIM

For detailed installation instructions, please consult the manual : [27218_XXX0_HAND.pdf](#)

SPY 20 L 2 AIR 93030

27218 9320 W-B






CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
	 29810 0040 - MOUNTING KIT SIDE AIR 104 Required
	 29810 0100 - MOUNTING KIT SIDE AIR ONLY 1 Required
	 29810 0080 - MOUNTING KIT NO AIR 104 Required
	 29810 0080 - MOUNTING KIT NO AIR 104 Required
	 29810 0200 - MOUNTING KIT TOP AIR ONLY 1 Required
	 29810 0240 - MOUNTING KIT TOP AIR 104 Required

FINISH YOUR SPECIFICATION

LED power supplies











of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the 'l' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.			Min current Max current
	300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1		2->7
	Dimtype: 1-10V		
	Cutout dimension (mm): 30		
	300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5		2->7
	Dimtype: DALI		
	Cutout dimension (mm): 45		
	300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL		2->7
	Dimtype: non-dimmable		
	Cutout dimension (mm): 30		
	300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL		2->7
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 45		
	300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1		2->7
	Dimtype: 1-10V		
	Cutout dimension (mm): 30		

DELTALIGHT










SPY 20 L 2 AIR 93030

27218 9320 W-B

	300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	2->7	☐
	Dimtype: DALI		
	Cutout dimension (mm): 45		
	300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL	2->7	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 30		
	300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL	2->7	☐
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 45		
	300 48 700 ED1 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM1	2->7	☐
	Dimtype: 1-10V		
	Cutout dimension (mm): 30		
	300 48 700 ED5 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5	2->7	☐
	Dimtype: DALI		
	Cutout dimension (mm): 45		
	300 48 700 MDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W MDL	2->7	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 30		
	300 48 700 WDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W WDL	2->7	☐
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 45		
	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6	8 8 8	☐
	Dimtype: mains (phase cut-off) or push button		
	Cutout dimension (mm): 56		
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	13(12) 12(12) 12(9) 9(6)	☐
	Dimtype: 1-10V or DALI or push button		
	Cutout dimension (mm): 82		
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7	2->9(7) 8(5) 8(3)	☐
	Dimtype: 1-10V or push button		
	Cutout dimension (mm): 72		

SPY 20 L 2 AIR 93030











27218 9320 W-B

	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9 Dimtype: 1-10V or DALI or push button	2->7 2->7 2->7	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	8(7) 8(5) 7(3) -	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	4->20(19) 20(14) 14(14) -	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	3->8(7) 7(5) 5(3)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	2->8(7) 7(5) 4(3)	☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	9->14 6->14 5->15 5->11	☐
	300 90 136 LED POWER SUPPLY MULTI-POWER HC DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 90	7(6)	☐
	300 90 148 LED POWER SUPPLY 1050mA-DC / 22W Dimtype: non-dimmable Cutout dimension (mm): 48	3(1)	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	3->7 2->7 2->7 2->6	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	2->9 2->9 2->8 2->6	☐

DELTALIGHT

SPY 20 L 2 AIR 93030








27218 9320 W-B

	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	2->8 2->9 2->9 2->6	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	12(12) 12(12) 12(10) 10(6)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	2->9 2->9 2->8 2->6	☐
	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	4->5	☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	5->7	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	3->5 3->4	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	6->9 6->8	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 48	2->7 2->7 2->4	☐
	21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 40	3->3	☐
	21012 0318 LED POWER SUPPLY 500mA / 10W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 40	3->3	☐


DELTALIGHT

SPY 20 L 2 AIR 93030

27218 9320 W-B

	21012 0328 LED POWER SUPPLY 700mA / 15W DIM8	3->3	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 40			
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	8(7)	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 60			
	21012 0490 LED POWER SUPPLY 700mA-DC / 30W IP68	7(3)	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 60			
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	8(5)	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 60			
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	2->7	☐
Dimtype: DALI			
Cutout dimension (mm): 30			
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	2->7	☐
Dimtype: DALI			
Cutout dimension (mm): 30			
	21032 0315 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5	2->7	☐
Dimtype: DALI			
Cutout dimension (mm): 30			

Mounting kits side air + light


	29810 0040 MOUNTING KIT SIDE AIR 104		☐
Cutout dimension (mm): 168			

DELTALIGHT

SPY 20 L 2 AIR 93030

27218 9320 W-B

Mounting kits top air + light




29810 0240 MOUNTING KIT TOP AIR 104

☐

Cutout dimension (mm): 135

Mounting kits side air only




29810 0100 MOUNTING KIT SIDE AIR ONLY 1

☐

Cutout dimension (mm): 168

Mounting kits top air only




29810 0200 MOUNTING KIT TOP AIR ONLY 1

☐

Cutout dimension (mm): 135

Mounting kits no air



29810 0080 MOUNTING KIT NO AIR 104

☐

Cutout dimension (mm): 168

Notes: