

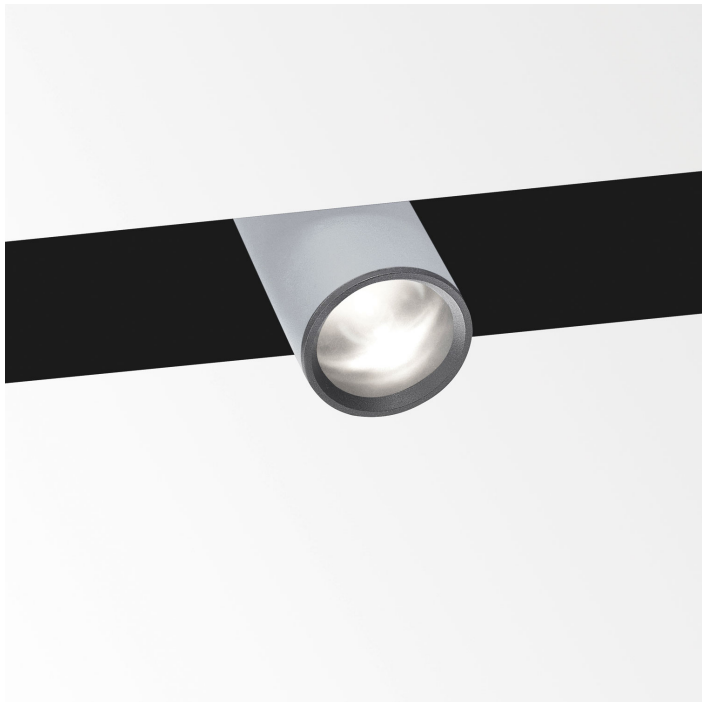


SPLIT-IT SPY FOCUS LP 930

18428 9300 W

AVAILABLE IN
BLACK 18428 9300 B
WHITE 18428 9300 W



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.6
INFORMATION	ADJUSTABLE ADJUSTABLE BEAM 8°-43° EXCLLED POWER SUPPLY 48V-DC EXCLLED POWER CONVERTER 48V TO 500-700mA-DC PRO

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, EAC, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 8,6-12,5W / CRI>90 (R9: 52) / 3000K / 1018-1378lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	8°-43°
LED TECHNICS (LIGHT SOURCE)	1378lm // 12,5W // 110lm/W
LED TECHNICS (LUMINAIRE)	565lm // 14,4W // 39lm/W

Requirements	
LED POWER CONVERTER 48V-DC to 500 mA-DC	
LED POWER CONVERTER 48V-DC to 700 mA-DC	
LED POWER SUPPLY 48V-DC	

Options	
THROUGH WIRING 48V-DC	



For detailed installation instructions, please consult the manual : [18428_XXXX_HAND.pdf](#)

SPLIT-IT SPY FOCUS LP 930

18428 9300 W






FINISH YOUR SPECIFICATION

Current supply

	416 99 00 THROUGH WIRING 48V-DC SPLIT-IT PRO	☐
	416 99 01 THROUGH WIRING 48V-DC SPLIT-IT ON	☐











LED power supplies

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
	300 48 500 PRO ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W PRO DIM1 Dimtype: 1-10V Cutout dimension (mm): 30	2 ☐
	300 48 500 PRO ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W PRO DIM5 Dimtype: DALI Cutout dimension (mm): 45	2 ☐
	300 48 500 PRO WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W PRO WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 45	2 ☐
	300 48 700 PRO ED1 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W PRO DIM1 Dimtype: 1-10V Cutout dimension (mm): 30	2 ☐
	300 48 700 PRO ED5 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W PRO DIM5 Dimtype: DALI Cutout dimension (mm): 45	2 ☐

SPLIT-IT SPY FOCUS LP 930







18428 9300 W

	300 48 700 PRO WDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W PRO WDL	2	☐
Dimtype: WDL = wireless dimmable			
Cutout dimension (mm): 45			
	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6	2 2 2	☐
Dimtype: mains (phase cut-off) or push button			
Cutout dimension (mm): 56			
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	4(4) 4(3)	☐
Dimtype: 1-10V or DALI or push button			
Cutout dimension (mm): 82			
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7	3(2) 2(1) 2(1)	☐
Dimtype: 1-10V or push button			
Cutout dimension (mm): 72			
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	2(1) 2(1)	☐
Dimtype: DALI			
Cutout dimension (mm): 72			
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	6(4) 4(3)	☐
Dimtype: 1-10V or DALI or push button			
Cutout dimension (mm): 84			
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	2(2) 1(1)	☐
Dimtype: 1-10V or push button			
Cutout dimension (mm): 55			
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	2(2) 1(1)	☐
Dimtype: DALI			
Cutout dimension (mm): 55			
	300 90 135 LED POWER SUPPLY MULTI-POWER HV	3->4 2->4 2->4	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 90			
	21012 0010 LED POWER SUPPLY MULTI POWER	2 2	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 50			

DELTALIGHT

SPLIT-IT SPY FOCUS LP 930






18428 9300 W

	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	3 2	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	3 3	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	4(4) 4(3) 3(3)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	3 2	☐
	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	1	☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	2->2	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	1 1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	2->3 2->2	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 48	2 1	☐
	21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 40	1	☐


DELTALIGHT

SPLIT-IT SPY FOCUS LP 930

18428 9300 W

	21012 0318 LED POWER SUPPLY 500mA / 10W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 40	1	☐
	21012 0328 LED POWER SUPPLY 700mA / 15W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 40	1	☐
	21012 0490 LED POWER SUPPLY 700mA-DC / 30W IP68 Dimtype: non-dimmable Cutout dimension (mm): 60	2(1)	☐
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68 Dimtype: non-dimmable Cutout dimension (mm): 60	2(1)	☐
	21032 0375 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W PRO DIM5 Dimtype: DALI Cutout dimension (mm): 30	2	☐
	21032 0385 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W PRO DIM5 Dimtype: DALI Cutout dimension (mm): 30	2	☐

COMPATIBLE COMPOSABLES

SPLIT-IT PRO profile	Available Colours
 372 01 00 SPT PRO - PROFILE	☒ ☐

Notes: