




M26L - HEDRA L 93033 DIM5

23253 9325 BBR

AVAILABLE IN
BLACK BRONZE 23253 9325 BBR
GOLD COLOURED 23253 9325 GC

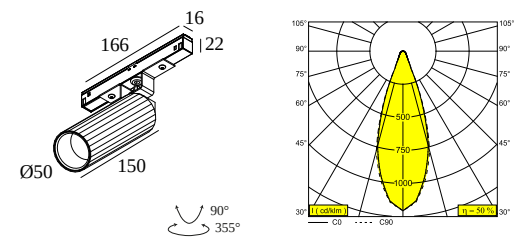

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-33° EXCL.LED POWER SUPPLY 48V-DC

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	D
CERTIFICATES	CB, EAC, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 8,6W / CRI>90 (R9: 52) / 3000K / 1089lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	33°
LED TECHNICS (LIGHT SOURCE)	1089lm // 8,6W // 127lm/W
LED TECHNICS (LUMINAIRE)	547lm // 9,9W // 55lm/W

Remarks
Take a look at our MAGNETIC PROFILES movie

Requirements
VIZIR TUBE LED POWER SUPPLY 48V-DC

Accessories
VIZIR HONEYCOMB VIZIR SOFTENING LENS

M26L - HEDRA L 93033 DIM5

23253 9325 BBR

For detailed installation instructions, please consult the manual : [23253_XXXX_HAND.pdf](#)

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 89 48 90 LED POWER SUPPLY 48V-DC / 90W

7

Dimtype: non-dimmable


Cutout dimension (mm): 75



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

8


Dimtype: non-dimmable



300 89 48 150 LED POWER SUPPLY 48V-DC / 150W

12


Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN

19

Dimtype: non-dimmable




21012 0230 LED POWER SUPPLY 48V-DC / 100W

8

Dimtype: non-dimmable

Cutout dimension (mm): 40



21012 0240 LED POWER SUPPLY 48V-DC / 200W

16

Dimtype: non-dimmable

Cutout dimension (mm): 40

DELTALIGHT

M26L - HEDRA L 93033 DIM5


23253 9325 BBR

Power box

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the 'l' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




23377 0010 B SLM26L - POWERBOX 48V-DC / 96W B

8

Dimtype: non-dimmable

23377 0010 W SLM26L - POWERBOX 48V-DC / 96W W

8



23377 0020 B SLM26L - MID POWERBOX 48V-DC / 96W B


8

Dimtype: non-dimmable


23377 0020 W SLM26L - MID POWERBOX 48V-DC / 96W W

8

Light altering devices




473 03 01 B VIZIR HONEYCOMB B



473 03 04 VIZIR SOFTENING LENS

Finish your product



473 01 00 B VIZIR TUBE B

473 01 00 FBR VIZIR TUBE FBR

473 01 00 FG VIZIR TUBE FG

DELTALIGHT

M26L - HEDRA L 93033 DIM5

23253 9325 BBR


473 01 00 W VIZIR TUBE W




COMPATIBLE COMPOSABLES

SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)


Available Colours




23358 0000 SLM26L - PROFILE



23358 0010 SLM26L - PROFILE 1m



23358 0020 SLM26L - PROFILE 2m




23358 0030 SLM26L - PROFILE 3m




SHIFTLINE M35R profile


Available Colours




23375 0000 SLM35R - PROFILE



23375 0010 SLM35R - PROFILE 1m



23375 0020 SLM35R - PROFILE 2m



23375 0030 SLM35R - PROFILE 3m



DELTALIGHT

M26L - HEDRA L 93033 DIM5

23253 9325 BBR

Notes: