




BOXY XL R 92737

251 71 21 923 W-W

AVAILABLE IN
BLACK-BLACK 251 71 21 923 B-B
WHITE-BLACK 251 71 21 923 W-B
WHITE-WHITE 251 71 21 923 W-W

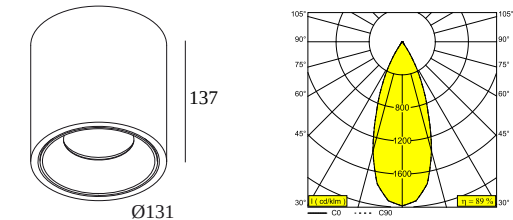

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	1.5
ADJUSTABILITY	non adjustable
INFORMATION	REFLECTOR FL-37° INCL.DIMMABLE LED POWER SUPPLY 500mA-DC
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	mains (phase cut-off)
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, LCA, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 16,3W / CRI>90 (R9: 60) / 2700K / 2209lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	37°
LED TECHNICS (LIGHT SOURCE)	2209lm // 16,3W // 136lm/W
LED TECHNICS (LUMINAIRE)	1969lm // 18,7W // 105lm/W
Accessories	

HONEYCOMB 78
SOFTENING LENS 78
GLASS SBL 78

For detailed installation instructions, please consult the manual : [251_71_21_XXX_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Miscellaneous control equipment



300 90 004 ED8 WIRELESS CONTROL DIM8

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 40

☐

Light altering devices



Ø78

201 02 01 B HONEYCOMB 78 B

☐

Ø78

201 02 04 SOFTENING LENS 78

☐

Ø78

201 02 05 GLASS SBL 78

☐

Notes: