




## LOGIC 190 R OK HONEYCOMB 93047

30217 9330 INOX

AVAILABLE IN  
**INOX** 30217 9330 INOX

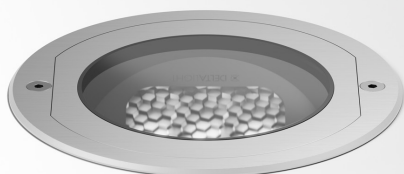

[View on website](#)



### General info

|                                             |                                                                                                                                                                                                   |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LOCATION</b>                             | outdoor                                                                                                                                                                                           |
| <b>INSTALLATION</b>                         | Floor Recessed                                                                                                                                                                                    |
| <b>CUTOUT SHAPE/SIZE (MM)</b>               | round - BOX                                                                                                                                                                                       |
| <b>RECESSED DEPTH (MM)</b>                  | 190                                                                                                                                                                                               |
| <b>INGRESS PROTECTION</b>                   | IP67                                                                                                                                                                                              |
| <b>PROTECTION AGAINST MECHANICAL IMPACT</b> | IK10                                                                                                                                                                                              |
| <b>WEIGHT (KG)</b>                          | 2                                                                                                                                                                                                 |
| <b>ADJUSTABILITY</b>                        | 0° to 25° swiveling                                                                                                                                                                               |
| <b>INFORMATION</b>                          | 9 x LENS SP-14°<br>INCL.LED POWER SUPPLY 500mA-DC<br>INCL.BEAM LENS 47°<br>INCL.HONEYCOMB<br>INCL.1 x CABLE H05 RN-F 3 x 0.75mm <sup>2</sup> 0,5m<br>INCL.IP68 CONNECTOR 3P<br>ESG 10mm max.500kg |

### Electrical info

|                     |                    |
|---------------------|--------------------|
| <b>ELECTRICAL</b>   | 220-240V / 50-60Hz |
| <b>CLASS</b>        | I                  |
| <b>POWER SUPPLY</b> | YES                |
| <b>DIM TYPE</b>     | non-dimmable       |
| <b>ENERGY CLASS</b> | E                  |
| <b>CERTIFICATES</b> | CB, ENEC, EPD, RCM |

### Lightsource info

|                                    |                                                      |
|------------------------------------|------------------------------------------------------|
| <b>LIGHTSOURCE NAME</b>            | LED                                                  |
| <b>LIGHTSOURCE</b>                 | LED cluster 12,6W / CRI>90 (R9: 60) / 3000K / 1604lm |
| <b>TM-30 VALUES</b>                | Rf: 92 / Rg: 99                                      |
| <b>SDCM</b>                        | SDCM3                                                |
| <b>RISKGROUP</b>                   | RG2                                                  |
| <b>LM80</b>                        | L80 > 150000                                         |
| <b>BEAMANGLE</b>                   | 47°                                                  |
| <b>LED TECHNICS (LIGHT SOURCE)</b> | 1604lm // 12,6W // 126lm/W                           |
| <b>LED TECHNICS (LUMINAIRE)</b>    | 818lm // 14,5W // 56lm/W                             |

### Requirements

LOGIC 190 R BOX


### Options

LOGIC 190 ANTI VANDAL SCREWS 2 PCS

For detailed installation instructions, please consult the manual : [30217\\_XXX0\\_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Ground mounting boxes



**30210 0010** LOGIC 190 R BOX

☐

Cutout dimension (mm): 300 x 230

Waterproof connection parts



**431 99 02** IP68 JUNCTION BOX 4P

☐

**21034 0150** IP68 Y-CONNECTOR 5P

☐

Other



**30210 0020** LOGIC 190 ANTI VANDAL SCREWS 2 PCS

☐

Notes: