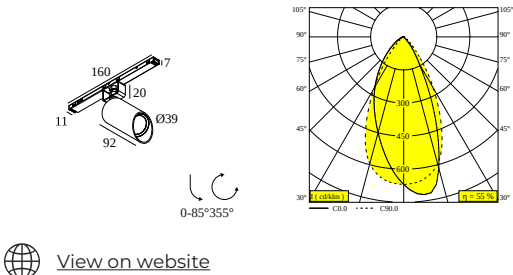




SPL14 - SPY 39 WALLWASH 927
DIM5

27330 9205 FBR

AVAILABLE IN
BLACK 27330 9205 B
FLEMISH BRONZE 27330 9205 FBR
FLEMISH GOLD 27330 9205 FG
GOLD COLOURED 27330 9205 GC
WHITE 27330 9205 W





General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 85° swiveling, 355° rotatable
INFORMATION	WALLWASH LENS EXCLLED POWER SUPPLY 48V-DC
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	CB, ENEC
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8W / CRI>90 (R9: 60) / 2700K / 753lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	753lm // 5,8W // 129lm/W
LED TECHNICS (LUMINAIRE)	413lm // 6,7W // 62lm/W
Requirements	
LED POWER SUPPLY 48V-DC	

For detailed installation instructions, please consult the manual : [27330_XXX5_HAND.pdf](#)



SPL14 - SPY 39 WALLWASH 927 DIM5

27330 9205 FBR

FINISH YOUR SPECIFICATION

LED power supplies		# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
 300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN Dimtype: non-dimmable	10	
 300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN Dimtype: non-dimmable	24	
 21012 0230 LED POWER SUPPLY 48V-DC / 100W Dimtype: non-dimmable Cutout dimension (mm): 40	10	
 21012 0240 LED POWER SUPPLY 48V-DC / 200W Dimtype: non-dimmable Cutout dimension (mm): 40	20	

COMPATIBLE COMPOSABLES

SPLITLINE 14 profile	Available Colours
 27300 0020 SPL14 - PROFILE 2m	
 27300 0030 SPL14 - PROFILE 3m	

Notes:

DELTALIGHT

SPL14 - SPY 39 WALLWASH 927 DIM5

27330 9205 FBR