




FRAX M SUPERSPOT 92708 DIM5

26111 9215 N

AVAILABLE IN
ALU GREY 26111 9215 A
FLEMISH BRONZE OUTDOOR 26111 9215 FBRX
ANTHRACITE 26111 9215 N

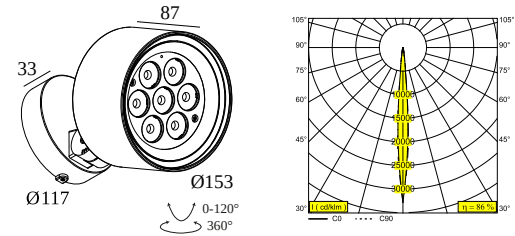

[View on website](#)



General info	
LOCATION	outdoor
INSTALLATION	Floor Surface mounted,Wall Surface mounted
INGRESS PROTECTION	IP65
PROTECTION AGAINST MECHANICAL IMPACT	IK08
WEIGHT (KG)	2.4
ADJUSTABILITY	0° to 120° swiveling, 360° rotatable
INFORMATION	7 x LENS SP-8° INCL.DIMMABLE LED POWER SUPPLY 900mA-DC
Electrical info	
ELECTRICAL	110-277V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	F
CERTIFICATES	EPD, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 18,2W / CRI>90 (R9: 50) / 2700K / 1884lm
TM-30 VALUES	Rf: 91 / Rg: 100
SDCM	SDCM3
RISKGROUP	RG2
LM80	L80 > 150000
BEAMANGLE	8°
LED TECHNICS (LIGHT SOURCE)	1884lm // 18,2W // 103lm/W
LED TECHNICS (LUMINAIRE)	1620lm // 20,9W // 77lm/W
Options	
FRAX ANTI VANDAL SCREWS	
Accessories	
FRAX M KAP	

For detailed installation instructions, please consult the manual : [26111_XX15_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Light altering devices



26070 0020 N FRAX M KAP N

☐

Other



26070 0030 FRAX ANTI VANDAL SCREWS 5 PCS

☐

Notes: