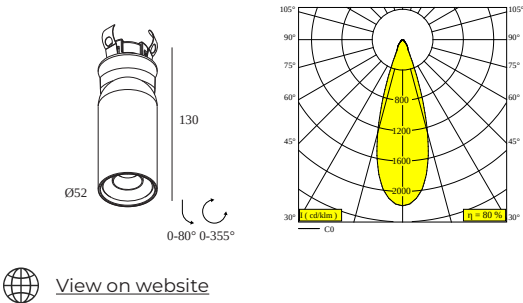




LUNELLE 52 CLIP 92730

32812 9220 BRA

- AVAILABLE IN
- BRUSHED ALU 32812 9220 BRA
 - BRUSHED ANTHRACITE 32812 9220 BRAT
 - BRUSHED BROWN BRONZE 32812 9220 BRBB
 - BRUSHED COPPER 32812 9220 BRCU
 - BRUSHED GOLD 32812 9220 BRG
 - BRUSHED OLD BRONZE 32812 9220 BROB



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Semi-recessed
CUTOUT SHAPE/SIZE (MM)	round - 40
RECESSED DEPTH (MM)	40
THICKNESS OF MOUNTING SURFACE (MM)	12
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	G

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED 5,6W / CRI>90 (R9: 80) / 2700K / 485lm
SDCM	SDCM3
RISKGROUP	RG2
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	485lm // 5,6W // 86lm/W
LED TECHNICS (LUMINAIRE)	388lm // 6,4W // 60lm/W

Requirements
LED POWER SUPPLY 500mA-DC



Accessories
VISOR 52

For detailed installation instructions, please consult the manual : [32812_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY







Ceiling Type	Mounting Kit
 Plasterboard	-
 Stucanet	-
 Wood	-
 Concrete	-
 Concrete + plaster	-
 Lintel + plaster	-
 Hollow-core slab	-
 Hollow-core slab + plaster	-
 Stretched ceiling	-

FINISH YOUR SPECIFICATION


LED power supplies	# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.	
 300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 82	1 -> 6 (6) ☐
 300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	1 -> 4 (2) ☐

LUNELLE 52 CLIP 92730

32812 9220 BRA

	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	1 -> 10 (7)	☐
	Dimtype: 1-10V or DALI or push button		
	Cutout dimension (mm): 84		
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	1 -> 3 (2)	☐
	Dimtype: 1-10V or push button		
	Cutout dimension (mm): 55		
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	1 -> 3 (2)	☐
	Dimtype: DALI		
	Cutout dimension (mm): 55		
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1 -> 4	☐
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 54		
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	1 -> 3	☐
	Dimtype: mains (phase cut-off)		
	Cutout dimension (mm): 48		
	21012 0595 LED POWER SUPPLY 500mA-DC 10W DIM5	1 -> 1	☐
	Dimtype: DALI		
	Cutout dimension (mm): 35		

Light altering devices

	32810 0010 DC VISOR 52 DC	☐
--	----------------------------------	--------------------------

Notes: