

M-LED LINE



This linear extrusion, with polycarbonate lens, allows for clean illumination within our Magnetic offering.

Specification	
Adjustability:	Fixed or 355° Swivel
Rating:	Damp

Performance	Fixed CCT	Soft Dim	Tunable White
CRI:	90	90	90
SDCM:	3	2	2
LED Maintenance:	L70>30,000h	L80>50,000h	L70>30,000h
*Standard Power Length 06:	14.5W	9.7W	8.7W
*Standard Power Length 08:	21.2W	12.4W	11.3W
*Standard Power Length 10:	24.8W	16.6W	13.9W
*Standard Power Length 12:	29W	19.3W	16.6W
*Standard Power Length A8:	20.7W		

Delivered Lumens	3000K	3000-1800K	2700-6500K
M-LED Line 06:	625	259	423-484
M-LED Line 08:	934	321	537-613
M-LED Line 10:	1084	411	631-721
M-LED Line 12:	1250	517	807-923
M-LED Line A8:	934		

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: LND10-SP30F-B-M-WD

Luminaire	Length ¹	Power*	CCT	Function	Finish	Application ²	Controls
LND LED LINE (downlight)	06 Linear approx 2'	SP Standard Power	30 3000K	F Fixed	B Black	M Shiftline M26H / Shiftline M26H + SBL ³ / Shiftline M26L Splitline M20 / Splitline M20 ST Profile	MDL ³ 0-10V dim via Modulator D5 Dali dim WD ³ Wireless dim
	08 Linear approx 2.5'		SD Soft Dim 3000-1800K				
	10 Linear approx 3.25'		TW ³ Tunable White 2700-6500K				
	12 Linear approx 4'						
	A8 Linear approx 2.5'	SP Standard Power	27 2700K 30 3000K	A Adjustable (OK)	B Black W White	MH Shiftline M26H Profile ML Shiftline M26L Profile	

¹ See Finish options for detailed dimensions.

² Low voltage system hardware specified separately.

³ Tunable White (CCT TW) & Shiftline M26H + SBL only available with Controls D5.

Related Products

M-LED Line Up, M-Inform, M-Dot.Com Wallwash, M-Dot.Com M4


DELTALIGHT

www.deltalight.com




Finish Options


M-LED LINE 06

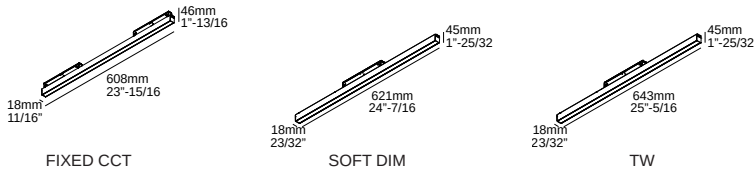


M-LED LINE 08

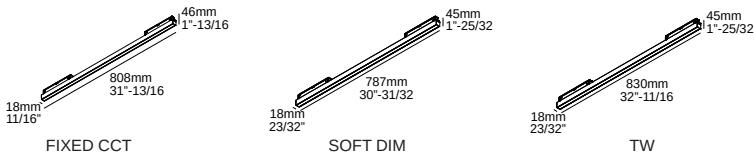

M-LED LINE 10

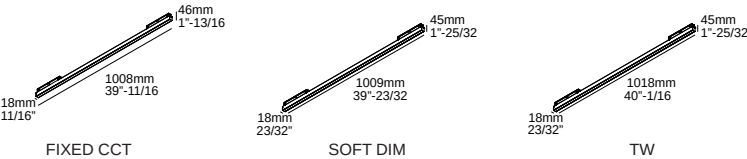

M-LED LINE 12

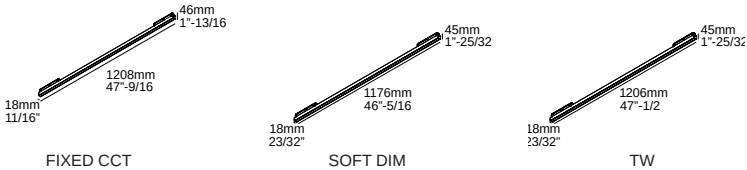

M-LED LINE FINISHES (ALL LENGTHS SHOWN ABOVE - FIXED)




M-LED LINE A8



Photometric Data

LED LINE FIXED

LED LINE ADJUSTABLE (OK)

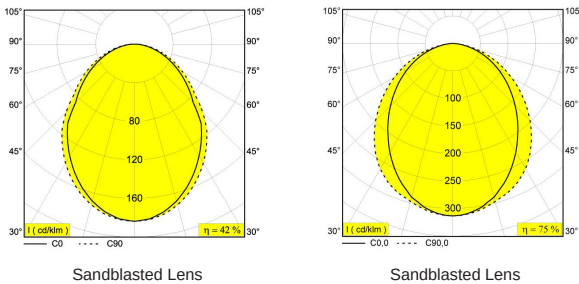

Installation Options

Delta Light's Magnetic Systems all utilize 48V remote power supplies. With a maximum of 96W per power supply, the below details maximum magnetic modules per power feed.

Maximum Capacity per Remote Power Supply	Static	Soft Dim	TW
M-LED Line 06:	6	8	10
M-LED Line 08:	4	6	8
M-LED Line 10:	3	5	6
M-LED Line 12:	3	4	5
M-LED Line A8:	4		

FOR SYSTEM HARDWARE, REFER TO THE FOLLOWING PROFILE SYSTEMS:
Shiftline M26H (surface/suspended, high-height, optional curved corner connectors)
Shiftline M26H + SBL (surface/suspended, high-height, integral continuous light line)
Shiftline M26L (surface/suspended, low-height, stacking possible)
Splitline M20 (recessed, knife-edge, optional curved corner connectors)
Splitline M20 ST (recessed, small trim)

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.