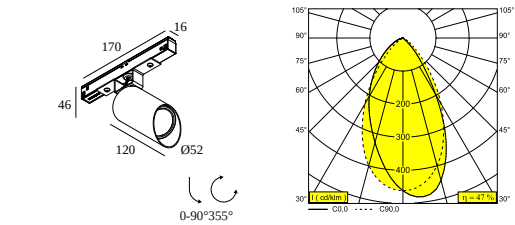




M20/M26H - SPY 52 WALLWASH
927 DIM5

19890 9205 FG

AVAILABLE IN
BLACK 19890 9205 B
FLEMISH BRONZE 19890 9205 FBR
FLEMISH GOLD 19890 9205 FG
GOLD COLOURED 19890 9205 GC
WHITE 19890 9205 W



[View on website](#)







General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	WALLWASH LENS EXCLLED POWER SUPPLY 48V-DC
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, EPD
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 8,6W / CRI>90 (R9: 60) / 2700K / 1041lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1041lm // 8,6W // 121lm/W
LED TECHNICS (LUMINAIRE)	491lm // 9,9W // 50lm/W
Remarks	
Take a look at our MAGNETIC PROFILES movie	
Requirements	
LED POWER SUPPLY 48V-DC	

For detailed installation instructions, please consult the manual : [19890_XXX5_HAND.pdf](#)


M20/M26H - SPY 52 WALLWASH 927 DIM5

19890 9205 FG

FINISH YOUR SPECIFICATION

LED power supplies		# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
 300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN Dimtype: non-dimmable	10	
 300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN Dimtype: non-dimmable	24	
 21012 0230 LED POWER SUPPLY 48V-DC / 100W Dimtype: non-dimmable Cutout dimension (mm): 40	10	
 21012 0240 LED POWER SUPPLY 48V-DC / 200W Dimtype: non-dimmable Cutout dimension (mm): 40	20	




COMPATIBLE COMPOSABLES





SHIFTLINE M26H + SBL	Available Colours
 30411 9205 SHIFTLINE M26H + SBL 2m DIM5	
 30411 9305 SHIFTLINE M26H + SBL 2m DIM5	
 30412 9205 SHIFTLINE M26H + SBL 3m DIM5	

DELTALIGHT

M20/M26H - SPY 52 WALLWASH 927 DIM5

19890 9205 FG

	30412 9305 SHIFTLINE M26H + SBL 3m DIM5	 
	30413 9205 SHIFTLINE M26H + SBL 4m DIM5	 
	30413 9305 SHIFTLINE M26H + SBL 4m DIM5	 

SHIFTLINE M26H profile	Available Colours
	23359 0000 SLM26H - PROFILE  
	23359 0010 SLM26H - PROFILE 1m  
	23359 0020 SLM26H - PROFILE 2m          
	23359 0030 SLM26H - PROFILE 3m          

SPLITLINE M20 ST profile	Available Colours
	23397 0000 SPM20 ST - PROFILE  
	23397 0020 SPM20 ST - PROFILE 2m  

DELTA LIGHT





M20/M26H - SPY 52 WALLWASH 927 DIM5

19890 9205 FG



23397 0030

SPM20 ST - PROFILE 3m

SPLITLINE M20 profile		Available Colours
	420 20 10 00 SPM20 - PROFILE 1m	
	420 20 20 00 SPM20 - PROFILE 2m	
	420 20 30 00 SPM20 - PROFILE 3m	
	23301 0000 SPM20 - PROFILE B	

Notes: