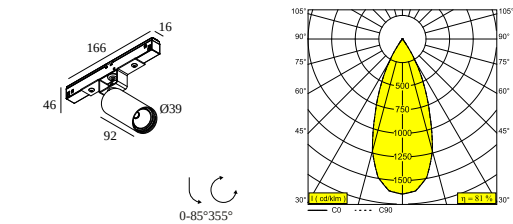




M20/M26H - SPY 391 SOFT 93040
DIM5

23424 9035 BROB

- AVAILABLE IN
- BLACK 23424 9035 B
 - BRUSHED ALU 23424 9035 BRA
 - BRUSHED ANTHRACITE 23424 9035 BRAT
 - BRUSHED COPPER 23424 9035 BRCU
 - BRUSHED GOLD 23424 9035 BRG
 - BRUSHED OLD BRONZE 23424 9035 BROB
 - FLEMISH BRONZE 23424 9035 FBR
 - FLEMISH GOLD 23424 9035 FG
 - GOLD COLOURED 23424 9035 GC
 - PIANO BLACK 23424 9035 PB
 - WHITE 23424 9035 W



[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 85° swiveling, 355° rotatable
INFORMATION	REFLECTOR WFL-40° EXCL.LED POWER SUPPLY 48V-DC
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	F
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6W / CRI>90 (R9: 50) / 3000K-1800K / 623lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	40°
LED TECHNICS (LIGHT SOURCE)	623lm // 6W // 105lm/W
LED TECHNICS (LUMINAIRE)	505lm // 6,9W // 73lm/W

Requirements

- SPY 39 TUBE
- LED POWER SUPPLY 48V-DC

DELTALIGHT

M20/M26H - SPY 391 SOFT 93040 DIM5

23424 9035 BROB

For detailed installation instructions, please consult the manual : [23424_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

8


Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN

20

Dimtype: non-dimmable




21012 0230 LED POWER SUPPLY 48V-DC / 100W

8

Dimtype: non-dimmable

Cutout dimension (mm): 40



21012 0240 LED POWER SUPPLY 48V-DC / 200W

17

Dimtype: non-dimmable

Cutout dimension (mm): 40

Finish your product



24144 0010 B SPY 39 TUBE B

24144 0010 FBR SPY 39 TUBE FBR

24144 0010 FG SPY 39 TUBE FG

24144 0010 GC SPY 39 TUBE GC

DELTALIGHT

M20/M26H - SPY 391 SOFT 93040 DIM5

23424 9035 BROB


		24144 0010 W SPY 39 TUBE W	☐
		24144 0070 SPY 39 TUBE SBL	☐

COMPATIBLE COMPOSABLES

SHIFTLINE M26H + SBL	Available Colours
----------------------	-------------------

		30411 9205 SHIFTLINE M26H + SBL 2m DIM5	☐
		30411 9305 SHIFTLINE M26H + SBL 2m DIM5	☐
		30412 9205 SHIFTLINE M26H + SBL 3m DIM5	☐
		30412 9305 SHIFTLINE M26H + SBL 3m DIM5	☐
		30413 9205 SHIFTLINE M26H + SBL 4m DIM5	☐
		30413 9305 SHIFTLINE M26H + SBL 4m DIM5	☐




SHIFTLINE M26H profile	Available Colours
------------------------	-------------------

		23359 0000 SLM26H - PROFILE	☐
---	--	------------------------------------	--------------------------

DELTALIGHT

M20/M26H - SPY 391 SOFT 93040 DIM5

23424 9035 BROB

	23359 0010 SLM26H - PROFILE 1m	
	23359 0020 SLM26H - PROFILE 2m	
	23359 0030 SLM26H - PROFILE 3m	




SPLITLINE M20 ST profile

Available Colours

	23397 0000 SPM20 ST - PROFILE	
	23397 0020 SPM20 ST - PROFILE 2m	
	23397 0030 SPM20 ST - PROFILE 3m	

SPLITLINE M20 profile


Available Colours

	420 20 10 00 SPM20 - PROFILE 1m	
	420 20 20 00 SPM20 - PROFILE 2m	
	420 20 30 00 SPM20 - PROFILE 3m	

DELTALIGHT

M20/M26H - SPY 391 SOFT 93040 DIM5

23424 9035 BROB



23301 0000 SPM20 - PROFILE B



Notes: