




M26L - SPY 52 93020 DIM5

23275 9325 FG

AVAILABLE IN
BLACK 23275 9325 B
FLEMISH BRONZE 23275 9325 FBR
FLEMISH GOLD 23275 9325 FG
GOLD COLOURED 23275 9325 GC
WHITE 23275 9325 W

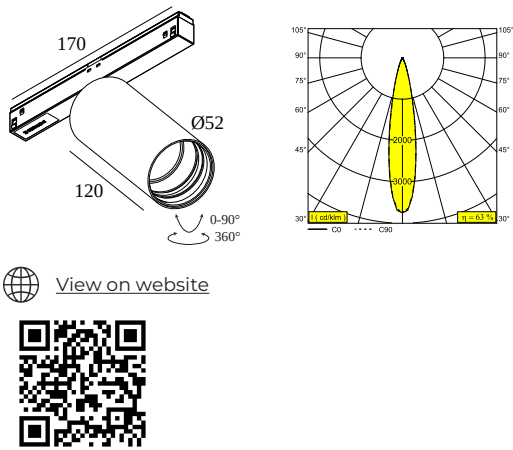

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 90° swiveling, 360° rotatable
INFORMATION	REFLECTOR FL-20° EXCLLED POWER SUPPLY 48V-DC Optional REFLECTORS 30° & 45° available
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, EPD
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 12,4W / CRI>90 (R9: 52) / 3000K / 1467lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	1467lm // 12,4W // 118lm/W
LED TECHNICS (LUMINAIRE)	919lm // 14,3W // 64lm/W

Remarks

Take a look at our [MAGNETIC PROFILES movie](#)

Requirements

SPY 52 TUBE
LED POWER SUPPLY 48V-DC

Accessories

HONEYCOMB 42
SPREAD LENS 42
LINEAR SPREAD LENS 42
SOFTENING LENS 42
GLASS SBL 42

For detailed installation instructions, please consult the manual : [23275_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION

LED power supplies		# of Fixtures
# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
5510090 300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN Dimtype: non-dimmable	7	
63114125 300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN Dimtype: non-dimmable	16	
1729830 21012 0230 LED POWER SUPPLY 48V-DC / 100W Dimtype: non-dimmable Cutout dimension (mm): 40	7	
2239230 21012 0240 LED POWER SUPPLY 48V-DC / 200W Dimtype: non-dimmable Cutout dimension (mm): 40	14	
Light altering devices		
13 19810 0010 B HONEYCOMB 42 SINGLE USE B		
13 19810 0020 LINEAR SPREAD LENS 42		

DELTALIGHT

M26L - SPY 52 93020 DIM5

23275 9325 FG

	19810 0030	SPREAD LENS 42	☐
	19810 0040	SOFTENING LENS 42	☐
	19810 0050	GLASS SBL 42	☐
	19810 0060 B	HONEYCOMB 42 DOUBLE USE B	☐

Finish your product

	19810 0100 B	SPY 52 TUBE B	☐
	19810 0100 FBR	SPY 52 TUBE FBR	☐
	19810 0100 FG	SPY 52 TUBE FG	☐
	19810 0100 GC	SPY 52 TUBE GC	☐
	19810 0100 W	SPY 52 TUBE W	☐

Replaceable reflector / lens

	19810 0180	SPY 52 REFLECTOR 20°	☐
--	-------------------	----------------------	--------------------------

DELTALIGHT

M26L - SPY 52 93020 DIM5

23275 9325 FG



19810 0190 SPY 52 REFLECTOR 45°




19810 0240 SPY 52 REFLECTOR 30°




COMPATIBLE COMPOSABLES

SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)


Available Colours




23358 0000 SLM26L - PROFILE



23358 0010 SLM26L - PROFILE 1m



23358 0020 SLM26L - PROFILE 2m




23358 0030 SLM26L - PROFILE 3m




SHIFTLINE M35R profile

Available Colours



23375 0000 SLM35R - PROFILE



23375 0010 SLM35R - PROFILE 1m



DELTALIGHT

M26L - SPY 52 93020 DIM5

23275 9325 FG



23375 0020 SLM35R - PROFILE 2m



23375 0030 SLM35R - PROFILE 3m



Notes: