




M20/M26H - SPY 391 SOFT 93020
MDL

23423 9020 BRA

- AVAILABLE IN
- BLACK 23423 9020 B
 - BRUSHED ALU 23423 9020 BRA
 - BRUSHED ANTHRACITE 23423 9020 BRAT
 - BRUSHED COPPER 23423 9020 BRCU
 - BRUSHED GOLD 23423 9020 BRG
 - BRUSHED OLD BRONZE 23423 9020 BROB
 - FLEMISH BRONZE 23423 9020 FBR
 - FLEMISH GOLD 23423 9020 FG
 - GOLD COLOURED 23423 9020 GC
 - PIANO BLACK 23423 9020 PB
 - WHITE 23423 9020 W

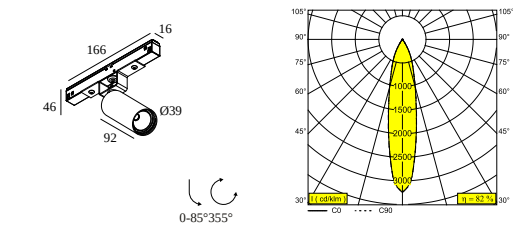

[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 85° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-20° EXCL.LED POWER SUPPLY 48V-DC

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	F
CERTIFICATES	EPD

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6W / CRI>90 (R9: 50) / 3000K-1800K / 623lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	623lm // 6W // 105lm/W
LED TECHNICS (LUMINAIRE)	508lm // 6,9W // 74lm/W

Requirements	
SPY 39 TUBE LED POWER SUPPLY 48V-DC	
Options	
DIMMABLE MODULATOR	

M20/M26H - SPY 391 SOFT 93020 MDL

23423 9020 BRA

For detailed installation instructions, please consult the manual : [23423_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Current supply

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



21032 0030 SMART 48 MODULATOR PLUG-IN WD

16

Dimtype: WDL = wireless dimmable

SMART 48

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 90 011 SMART 48 MODULATOR DIM9

16

Dimtype: 1-10V or DALI or push button



300 90 012 SMART 48 MODULATOR WD

16

Dimtype: WDL = wireless dimmable

LED power supplies

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

8

Dimtype: non-dimmable

DELTALIGHT

M20/M26H - SPY 391 SOFT 93020 MDL


23423 9020 BRA

	300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN	20	☐
	Dimtype: non-dimmable		
	21012 0230 LED POWER SUPPLY 48V-DC / 100W	8	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 40		
	21012 0240 LED POWER SUPPLY 48V-DC / 200W	17	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 40		

Finish your product

	24144 0010 B SPY 39 TUBE B	☐
	24144 0010 FBR SPY 39 TUBE FBR	☐
	24144 0010 FG SPY 39 TUBE FG	☐
	24144 0010 GC SPY 39 TUBE GC	☐
	24144 0010 W SPY 39 TUBE W	☐
	24144 0070 SPY 39 TUBE SBL	☐


COMPATIBLE COMPOSABLES

SHIFTLINE M26H profile	Available Colours
	23359 0000 SLM26H - PROFILE  


DELTALIGHT

M20/M26H - SPY 391 SOFT 93020 MDL


23423 9020 BRA



23359 0010 SLM26H - PROFILE 1m



23359 0020 SLM26H - PROFILE 2m



23359 0030 SLM26H - PROFILE 3m



SPLITLINE M20 ST profile

Available Colours



23397 0000 SPM20 ST - PROFILE



23397 0020 SPM20 ST - PROFILE 2m




23397 0030 SPM20 ST - PROFILE 3m




SPLITLINE M20 profile


Available Colours



420 20 10 00 SPM20 - PROFILE 1m



420 20 20 00 SPM20 - PROFILE 2m



420 20 30 00 SPM20 - PROFILE 3m



DELTALIGHT

M20/M26H - SPY 391 SOFT 93020 MDL

23423 9020 BRA



23301 0000 SPM20 - PROFILE B



Notes: