DELTALIGHT

LED POWER SUPPLY DYNAMIC FOCUS DIM5

REFERENCE 32110 0015


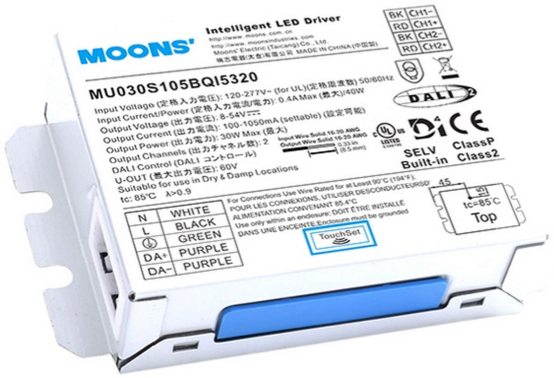


Image may differ from the actual product



View on website

General info	
LOCATION	indoor
CUTOUT SHAPE/SIZE (MM)	round - 75
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.2
INFORMATION	CURRENT CONTROLLED PROGRAMMED FOR DYNAMIC FOCUS - 2 OUTPUT CHANNELS OUTPUT: 100-1050mA / 30W max. λ > 0,9 Inrush current : 6,1A - 45µs @ 230V-AC Max. 80 units on circuit breaker B 16A @ 230V-AC

Electrical info	
CLASS	I
DIM TYPE	DALI

WHERE USED

32111 9200	DEEP RINGO DYNAMIC FOCUS 927
32111 9300	DEEP RINGO DYNAMIC FOCUS 930
32112 9200	DEEP RINGO DYNAMIC FOCUS TRIMLESS 927
32112 9300	DEEP RINGO DYNAMIC FOCUS TRIMLESS 930

Notes: