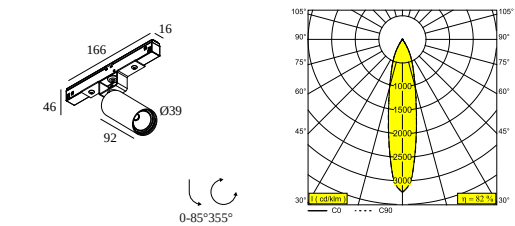




M20/M26H - SPY 391 SOFT 93020
MDL

23423 9020 BRG

AVAILABLE IN
BLACK 23423 9020 B
BRUSHED ALU 23423 9020 BRA
BRUSHED ANTHRACITE 23423 9020 BRAT
BRUSHED COPPER 23423 9020 BRCU
BRUSHED GOLD 23423 9020 BRG
BRUSHED OLD BRONZE 23423 9020 BROB
FLEMISH BRONZE 23423 9020 FBR
FLEMISH GOLD 23423 9020 FG
GOLD COLOURED 23423 9020 GC
PIANO BLACK 23423 9020 PB
WHITE 23423 9020 W



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 85° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-20° EXCL.LED POWER SUPPLY 48V-DC

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	F

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6W / CRI>90 (R9: 50) / 3000K-1800K / 623lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	623lm // 6W // 105lm/W
LED TECHNICS (LUMINAIRE)	508lm // 6,9W // 74lm/W

Requirements	
SPY 39 TUBE LED POWER SUPPLY 48V-DC	
Options	
DIMMABLE MODULATOR	

DELTALIGHT

M20/M26H - SPY 391 SOFT 93020 MDL

23423 9020 BRG

For detailed installation instructions, please consult the manual : [23423_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Current supply

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



21032 0030 SMART 48 MODULATOR PLUG-IN WD

16

Dimtype: WDL = wireless dimmable

SMART 48

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 90 011 SMART 48 MODULATOR DIM9

16

Dimtype: 1-10V or DALI or push button



300 90 012 SMART 48 MODULATOR WD

16

Dimtype: WDL = wireless dimmable

LED power supplies

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN




8

Dimtype: non-dimmable


DELTALIGHT

M20/M26H - SPY 391 SOFT 93020 MDL


23423 9020 BRG

	300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN	20	☐
Dimtype: non-dimmable			
	21012 0230 LED POWER SUPPLY 48V-DC / 100W	8	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 40			
	21012 0240 LED POWER SUPPLY 48V-DC / 200W	17	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 40			

Finish your product

	24144 0010 B SPY 39 TUBE B	☐
	24144 0010 FBR SPY 39 TUBE FBR	☐
	24144 0010 FG SPY 39 TUBE FG	☐
	24144 0010 GC SPY 39 TUBE GC	☐
	24144 0010 W SPY 39 TUBE W	☐
	24144 0070 SPY 39 TUBE SBL	☐

COMPATIBLE COMPOSABLES

SHIFTLINE M26H profile	Available Colours
	23359 0000 SLM26H - PROFILE  

DELTALIGHT

M20/M26H - SPY 391 SOFT 93020 MDL

23423 9020 BRG

	23359 0010 SLM26H - PROFILE 1m	
	23359 0020 SLM26H - PROFILE 2m	
	23359 0030 SLM26H - PROFILE 3m	

SPLITLINE M20 ST profile

Available Colours

	23397 0000 SPM20 ST - PROFILE	
	23397 0020 SPM20 ST - PROFILE 2m	
	23397 0030 SPM20 ST - PROFILE 3m	

SPLITLINE M20 profile

Available Colours

	420 20 10 00 SPM20 - PROFILE 1m	
	420 20 20 00 SPM20 - PROFILE 2m	
	420 20 30 00 SPM20 - PROFILE 3m	

DELTALIGHT

M20/M26H - SPY 391 SOFT 93020 MDL

23423 9020 BRG



23301 0000 SPM20 - PROFILE B

Notes: