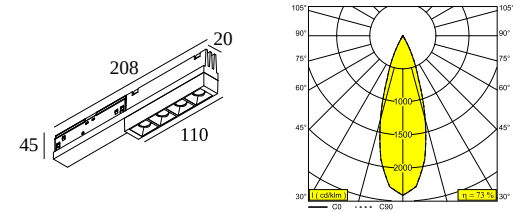




M - DOT.COM M4 93032 MDL

424 612 04 932 MDL B-FG

AVAILABLE IN
BLACK-BLACK 424 612 04 932 MDL B-B
BLACK-CHROMED 424 612 04 932 MDL B-C
BLACK-FLEMISH GOLD 424 612 04 932 MDL B-FG



[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.2
ADJUSTABILITY	non adjustable
INFORMATION	4 x REFLECTOR FL-32° EXCL.LED POWER SUPPLY 48V-DC
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	E
CERTIFICATES	CB, EAC, ENEC, EPD
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 5,7W / CRI>90 (R9: 50) / 3000K / 648lm
TM-30 VALUES	Rf: 90 / Rg: 101
SDCM	SDCM3
RISKGROUP	RG2
LM80	L80 > 60000
BEAMANGLE	32°
LED TECHNICS (LIGHT SOURCE)	648lm // 5,7W // 114lm/W
LED TECHNICS (LUMINAIRE)	474lm // 6,6W // 72lm/W
Remarks	
Take a look at our MAGNETIC PROFILES movie	
Requirements	
LED POWER SUPPLY 48V-DC	
Options	
DIMMABLE MODULATOR	

For detailed installation instructions, please consult the manual : [424_612_04_XX_MDL_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Current supply

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



21032 0030 SMART 48 MODULATOR PLUG-IN WD

29

Dimtype: WDL = wireless dimmable

SMART 48

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 90 011 SMART 48 MODULATOR DIM9

29

Dimtype: 1-10V or DALI or push button



300 90 012 SMART 48 MODULATOR WD

29

Dimtype: WDL = wireless dimmable


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 89 48 90 LED POWER SUPPLY 48V-DC / 90W

14

Dimtype: non-dimmable

Cutout dimension (mm): 75



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

15

Dimtype: non-dimmable




DELTALIGHT

M - DOT.COM M4 93032 MDL

424 612 04 932 MDL B-FG

	300 89 48 150 LED POWER SUPPLY 48V-DC / 150W	23	☐
Dimtype: non-dimmable			
	300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN	37	☐
Dimtype: non-dimmable			
	21012 0230 LED POWER SUPPLY 48V-DC / 100W	15	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 40			
	21012 0240 LED POWER SUPPLY 48V-DC / 200W	31	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 40			




COMPATIBLE COMPOSABLES

SHIFTLINE M26 profile		Available Colours	
	420 26 10 00 SLM26 - PROFILE 1m		
	420 26 20 00 SLM26 - PROFILE 2m		
	420 26 30 00 SLM26 - PROFILE 3m		
SHIFTLINE M26H profile		Available Colours	
	23359 0000 SLM26H - PROFILE	 	

DELTALIGHT





M - DOT.COM M4 93032 MDL

424 612 04 932 MDL B-FG

	23359 0010 SLM26H - PROFILE 1m	
	23359 0020 SLM26H - PROFILE 2m	
	23359 0030 SLM26H - PROFILE 3m	



SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)

Available Colours

	23358 0000 SLM26L - PROFILE	
	23358 0010 SLM26L - PROFILE 1m	
	23358 0020 SLM26L - PROFILE 2m	
	23358 0030 SLM26L - PROFILE 3m	

SHIFTLINE M35R profile

Available Colours

	23375 0000 SLM35R - PROFILE	
	23375 0010 SLM35R - PROFILE 1m	




DELTALIGHT

M - DOT.COM M4 93032 MDL

424 612 04 932 MDL B-FG

	23375 0020 SLM35R - PROFILE 2m	
	23375 0030 SLM35R - PROFILE 3m	


SHIFTLINE M44 profile	Available Colours
-----------------------	-------------------

	23374 0000 SLM44 - PROFILE	
	23374 0020 SLM44 - PROFILE 2m	
	23374 0030 SLM44 - PROFILE 3m	

SPLITLINE M20 ST profile	Available Colours
--------------------------	-------------------

	23397 0000 SPM20 ST - PROFILE	 
	23397 0020 SPM20 ST - PROFILE 2m	 
	23397 0030 SPM20 ST - PROFILE 3m	 




SPLITLINE M20 profile	Available Colours
-----------------------	-------------------

	420 20 10 00 SPM20 - PROFILE 1m	
--	--	---

DELTALIGHT

M - DOT.COM M4 93032 MDL

424 612 04 932 MDL B-FG

	420 20 20 00 SPM20 - PROFILE 2m	
	420 20 30 00 SPM20 - PROFILE 3m	
	23301 0000 SPM20 - PROFILE B	

Notes: