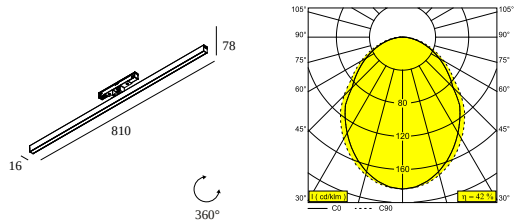




M26H - LED LINE OK 930 DIM5

29320 9305 B

AVAILABLE IN
BLACK 29320 9305 B
WHITE 29320 9305 W



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	300° swiveling
INFORMATION	EXCL.LED POWER SUPPLY 48V-DC
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	E
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED flex 18W / CRI>90 (R9: 60) / 3000K / 2240lm
SDCM	SDCM3
LM80	L70 > 30000
LED TECHNICS (LIGHT SOURCE)	2240lm // 18W // 124lm/W
LED TECHNICS (LUMINAIRE)	934lm // 20,7W // 45lm/W
Remarks	
Take a look at our MAGNETIC PROFILES movie	
Requirements	
LED POWER SUPPLY 48V-DC	

For detailed installation instructions, please consult the manual : [29320_XXX5_HAND.pdf](#)

M26H - LED LINE OK 930 DIM5

29320 9305 B

FINISH YOUR SPECIFICATION


Current supply

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



21032 0030 SMART 48 MODULATOR PLUG-IN WD

9

Dimtype: WDL = wireless dimmable


SMART 48

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



300 90 011 SMART 48 MODULATOR DIM9

9

Dimtype: 1-10V or DALI or push button



300 90 012 SMART 48 MODULATOR WD

9

Dimtype: WDL = wireless dimmable


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

4

Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN



11

Dimtype: non-dimmable




DELTALIGHT

M26H - LED LINE OK 930 DIM5

29320 9305 B

	21012 0230 LED POWER SUPPLY 48V-DC / 100W	4	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 40		
	21012 0240 LED POWER SUPPLY 48V-DC / 200W	9	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 40		





COMPATIBLE COMPOSABLES

SHIFTLINE M26H + SBL		Available Colours	
	30411 9205 SHIFTLINE M26H + SBL 2m DIM5	☒ ☐	
	30411 9305 SHIFTLINE M26H + SBL 2m DIM5	☒ ☐	
	30412 9205 SHIFTLINE M26H + SBL 3m DIM5	☒ ☐	
	30412 9305 SHIFTLINE M26H + SBL 3m DIM5	☒ ☐	
	30413 9205 SHIFTLINE M26H + SBL 4m DIM5	☒ ☐	
	30413 9305 SHIFTLINE M26H + SBL 4m DIM5	☒ ☐	

DELTALIGHT

M26H - LED LINE OK 930 DIM5

29320 9305 B

SHIFTLINE M26H profile		Available Colours
	23359 0000 SLM26H - PROFILE	 
	23359 0010 SLM26H - PROFILE 1m	 
	23359 0020 SLM26H - PROFILE 2m	         
	23359 0030 SLM26H - PROFILE 3m	         

Notes: