




COMPO M WALLWASH 930

9 15731 9300 C

AVAILABLE IN

CHROME 9 15731 9300 C

BLANC 9 15731 9300 W

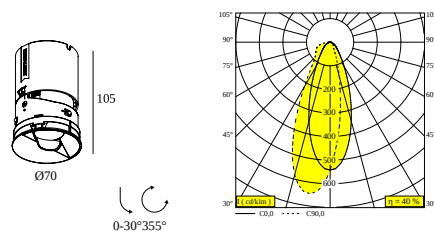

 [View on website](#)



General info

LOCATION	interieur
INSTALLATION	Plafond Encastré
CUTOUT SHAPE/SIZE (MM)	circulaire - 110
RECESSED DEPTH (MM)	105
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.256
ADJUSTABILITY	0° à 30° inclinable, 355° rotatif

Electrical info

CLASS	III
DIM TYPE	selon le type d'alimentation externe
ENERGY CLASS	F

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 12,5W / CRI>90 (R9: 52) / 3000K / 1378lm
RVALUES	rf: 90 / Rg: 99
SDMC	SDCM2
RISKGROUP	RG1
BEAMANGLE	NA
LED TECHNICS (LIGHT SOURCE)	1378lm // 12,5W // 110lm/W
LED TECHNICS (LUMINAIRE)	557lm // 14,4W // 39lm/W

Requirements

LED POWER SUPPLY 700 mA - DC

For detailed installation instructions, please consult the manual : [9_15731_XXX0_HAND.pdf](#)

COMPO M WALLWASH 930

9 15731 9300 C

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required

FINISH YOUR SPECIFICATION

alimentation led

of Fixtures

 web2print_power_supply_info_box		Min current Max current
15710 3500	LED POWER SUPPLY MULTIPOWER 15W NO DIM 700mA	1 ☐
15710 4000	LED POWER SUPPLY MULTIPOWER 15W DIM8 700mA	1 ☐
15710 4900	LED POWER SUPPLY MULTIPOWER 20W DIM1 700mA	1 ☐
15710 5600	LED POWER SUPPLY MULTIPOWER 20W DALI DT6 700mA	1 ☐
Dimtype: DALI		

kit de montage

	15710 0020 B MOUNTING KIT COMPO M TRIM B	☐
Cutout dimension (mm): 76		
	15710 0020 W MOUNTING KIT COMPO M TRIM W	☐
	15710 0050 MOUNTING KIT COMPO M TRIMLESS	☐
Cutout dimension (mm): 76		

DELTALIGHT

COMPO M WALLWASH 930

9 15731 9300 C

Notes: