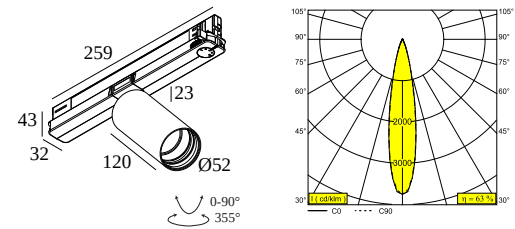




SPY 52 TW 96520 ADM DIM5

19881 9025 FW

AVAILABLE IN
SCHWARZ 19881 9025 B
VOLLWEISS 19881 9025 FW
WEISS 19881 9025 W



 [View on website](#)



General info	
LOCATION	innenbereich
INSTALLATION	Schiene Schienenmontiert
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.9
ADJUSTABILITY	0° to 90° schwenkbar, 355° drehbar
INFORMATION	REFLECTOR FL-20° 3F MULTI DIMMABLE POWER ADAPTER 500mA - (DALI DT8) Optional REFLECTORS 30° & 45° available
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 9W / CRI>90 (R9: 50) / 2700K-6500K / 1087lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	1087lm // 9W // 121lm/W
LED TECHNICS (LUMINAIRE)	681lm // 10,4W // 66lm/W

Requirements

SPY 52 TUBE
TRACK 3F DIM

Accessories

HONEYCOMB 42
SPREAD LENS 42
LINEAR SPREAD LENS 42
SOFTENING LENS 42
GLASS SBL 42


For detailed installation instructions, please consult the manual : [19881_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION


Licht veredelndes Zubehör



19810 0010 B HONEYCOMB 42 SINGLE USE B

☐


19810 0020 LINEAR SPREAD LENS 42

☐


19810 0030 SPREAD LENS 42

☐

19810 0040 SOFTENING LENS 42

☐


19810 0050 GLASS SBL 42

☐

19810 0060 B HONEYCOMB 42 DOUBLE USE B

☐

Beenden Sie Ihr Produkt



19810 0100 B SPY 52 TUBE B

☐




DELTALIGHT

SPY 52 TW 96520 ADM DIM5

19881 9025 FW

19810 0100 FBR	SPY 52 TUBE FBR	☐
19810 0100 FG	SPY 52 TUBE FG	☐
19810 0100 GC	SPY 52 TUBE GC	☐
19810 0100 W	SPY 52 TUBE W	☐

Austauschbarer Reflektor / Linse

	19810 0180	SPY 52 REFLECTOR 20°	☐
	19810 0190	SPY 52 REFLECTOR 45°	☐
	19810 0240	SPY 52 REFLECTOR 30°	☐

COMPATIBLE TRACKS

TRACK 3F DIM H			Available Colours
200 14 410	TRACK 3F DIM H 1m	1000 m 1.6 kg	☒ ☐
200 14 420	TRACK 3F DIM H 2m	2000 m 3.2 kg	☒ ☐
200 14 430	TRACK 3F DIM H 3m	3000 m 4.8 kg	☒ ☐
TRACK 3F DIM IN			Available Colours
200 13 410	TRACK 3F DIM IN 1m	1000 m 1.2 kg	☒ ☐
200 13 420	TRACK 3F DIM IN 2m	2000 m 2.4 kg	☒ ☐
200 13 430	TRACK 3F DIM IN 3m	3000 m 3.5 kg	☒ ☐
TRACK 3F DIM ON			Available Colours
200 12 410	TRACK 3F DIM ON 1m	1000 m 1.1 kg	☐ ☒ ☐

DELTALIGHT

SPY 52 TW 96520 ADM DIM5

19881 9025 FW

200 12 420 TRACK 3F DIM ON 2m	2000 m 2.1 kg	  
200 12 430 TRACK 3F DIM ON 3m	3000 m 3.1 kg	  

Notes: