




SUPER-OH! XS PIVOT 25 ADM
DIM8

308 22 02 83 ADM ED8 W

AVAILABLE IN
BLACK 308 22 02 83 ADM ED8 B
WHITE 308 22 02 83 ADM ED8 W

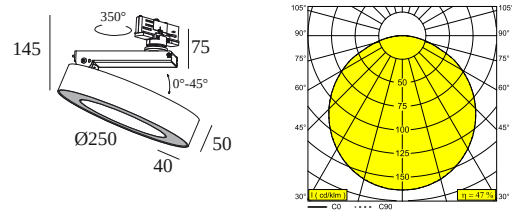

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Mains voltage track Mains voltage track mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	1
ADJUSTABILITY	0° to 45° swiveling, 350° rotatable
INFORMATION	INCL.PC SBL 3F MULTI ADAPTER
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	mains (phase cut-off)
ENERGY CLASS	F
CERTIFICATES	CB, ENEC, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 13,5W / CRI>80 / 3000K / 1470lm
LED TECHNICS (LIGHT SOURCE)	1470lm // 13,5W // 109lm/W
LED TECHNICS (LUMINAIRE)	691lm // 15,5W // 45lm/W
Requirements	
TRACK 3F DIM	

For detailed installation instructions, please consult the manual : [308 22 02 XX ADM ED8 HAND.pdf](#)

COMPATIBLE TRACKS

TRACK 3F DIM H		Available Colours	
200 14 410	TRACK 3F DIM H 1m	1000 m 1.6 kg	 
200 14 420	TRACK 3F DIM H 2m	2000 m 3.2 kg	 

DELTALIGHT

SUPER-OH! XS PIVOT 25 ADM DIM8

308 22 02 83 ADM ED8 W

200 14 430 TRACK 3F DIM H 3m	3000 m	4.8 kg	 
TRACK 3F DIM IN		Available Colours	
200 13 410 TRACK 3F DIM IN 1m	1000 m	1.2 kg	 
200 13 420 TRACK 3F DIM IN 2m	2000 m	2.4 kg	 
200 13 430 TRACK 3F DIM IN 3m	3000 m	3.5 kg	 
TRACK 3F DIM ON		Available Colours	
200 12 410 TRACK 3F DIM ON 1m	1000 m	1.1 kg	  
200 12 420 TRACK 3F DIM ON 2m	2000 m	2.1 kg	  
200 12 430 TRACK 3F DIM ON 3m	3000 m	3.1 kg	  

Notes: