




ODRON ON 2 92728/41 DIM8

26215 9208 B

AVAILABLE IN
BLACK 26215 9208 B
WHITE 26215 9208 W

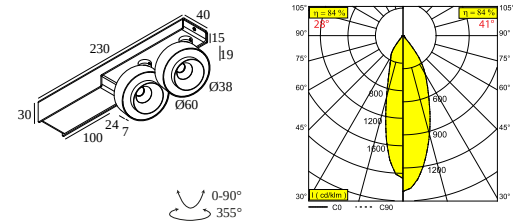

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.7
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	INCL.4 x INTERCHANGABLE REFLECTOR: FL-28° + WFL-41° INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	mains (phase cut-off)
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	2 x (LED array 5,8W / CRI>90 (R9: 60) / 2700K / 702lm)
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	28°/41°
LED TECHNICS (LIGHT SOURCE)	1404lm // 11,6W // 121lm/W
LED TECHNICS (LUMINAIRE)	1177lm // 13,3W // 88lm/W
Accessories	
ODRON COVER	

For detailed installation instructions, please consult the manual : [26215_XXX8_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Decorative ornaments



26210 0020 GC ODRON COVER GC

☐

Notes: