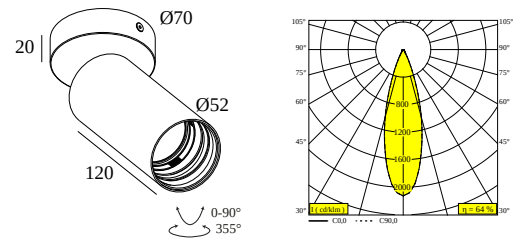




SPY 52 ON TW 96530

19825 9040 B

AVAILABLE IN
BLACK 19825 9040 B
FULL WHITE 19825 9040 FW
WHITE 19825 9040 W



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-30° EXCL.LED POWER SUPPLY 500mA-DC TW - (DALI DT8) Optional REFLECTORS 20° & 45° available

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, LCA

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 9W / CRI>90 (R9: 50) / 2700K-6500K / 1087lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	1087lm // 9W // 121lm/W
LED TECHNICS (LUMINAIRE)	694lm // 10,4W // 67lm/W

Requirements	
SPY 52 TUBE	
LED POWER SUPPLY 500mA-DC TW	

Options	
COVERSET R 90-100	

Accessories	
HONEYCOMB 42	
SPREAD LENS 42	
LINEAR SPREAD LENS 42	
SOFTENING LENS 42	
GLASS SBL 42	

For detailed installation instructions, please consult the manual : [19825_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION






LED power supplies		# of Fixtures
# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
124 24 79 21012 0355 LED POWER SUPPLY 500mA-DC 2CH TW DIM5 Dimtype: DALI Cutout dimension (mm): 85	2	
Coversets		
Ø90 2 Ø10 2 204 00 90 ANO COVERSET R 90 ANO		
204 00 90 B COVERSET R 90 B		
204 00 90 W COVERSET R 90 W		
Ø100 2 Ø10 2 204 00 100 ANO COVERSET R 100 ANO		
204 00 100 B COVERSET R 100 B		
204 00 100 W COVERSET R 100 W		

DELTALIGHT


SPY 52 ON TW 96530

19825 9040 B

Light altering devices

	19810 0010 B	HONEYCOMB 42 SINGLE USE B	☐
	19810 0020	LINEAR SPREAD LENS 42	☐
	19810 0030	SPREAD LENS 42	☐
	19810 0040	SOFTENING LENS 42	☐
	19810 0050	GLASS SBL 42	☐
	19810 0060 B	HONEYCOMB 42 DOUBLE USE B	☐

Finish your product

	19810 0100 B	SPY 52 TUBE B	☐
	19810 0100 FBR	SPY 52 TUBE FBR	☐
	19810 0100 FG	SPY 52 TUBE FG	☐
	19810 0100 GC	SPY 52 TUBE GC	☐

DELTALIGHT

SPY 52 ON TW 96530

19825 9040 B

<u>19810 0100 W</u>	SPY 52 TUBE W	☐
----------------------------	---------------	--------------------------

Replaceable reflector / lens

	<u>19810 0180</u>	SPY 52 REFLECTOR 20°	☐
--	--------------------------	----------------------	--------------------------

	<u>19810 0190</u>	SPY 52 REFLECTOR 45°	☐
--	--------------------------	----------------------	--------------------------

	<u>19810 0240</u>	SPY 52 REFLECTOR 30°	☐
---	--------------------------	----------------------	--------------------------

Notes: