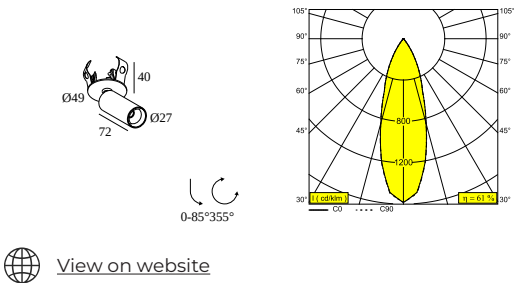




SPY 27 CLIP 93030

24118 9320 FG-B

AVAILABLE IN
BLACK-BLACK 24118 9320 B-B
FLEMISH BRONZE-BLACK 24118 9320 FBR-B
FLEMISH GOLD-BLACK 24118 9320 FG-B
FULL WHITE 24118 9320 FW
GOLD COLORED-BLACK 24118 9320 GC-B
WHITE-WHITE 24118 9320 W-W



General info	
LOCATION	indoor
INSTALLATION	Ceiling Semi-recessed
CUTOUT SHAPE/SIZE (MM)	round - 43
RECESSED DEPTH (MM)	40
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.2
ADJUSTABILITY	0° to 85° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-30° EXCLLED POWER SUPPLY 350mA-DC SPY 27 TUBE included (B for all versions W for FW version)
Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, LCA
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8W / CRI>90 (R9: 52) / 3000K / 787lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	787lm // 5,8W // 135lm/W
LED TECHNICS (LUMINAIRE)	480lm // 6,7W // 72lm/W
Requirements	
LED POWER SUPPLY 350mA-DC DIM	
Accessories	
VISOR 27	

For detailed installation instructions, please consult the manual : [24118_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1

2

Dimtype: 1-10V

Cutout dimension (mm): 30



300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

2

Dimtype: DALI

Cutout dimension (mm): 45



300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL

2

Dimtype: non-dimmable

Cutout dimension (mm): 30




300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL

2

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45




300 90 61 LED POWER SUPPLY MULTI-POWER DIM6

2

Dimtype: mains (phase cut-off) or push button

Cutout dimension (mm): 56




300 90 63 LED POWER SUPPLY MULTI-POWER DIM9

4(4)

Dimtype: 1-10V or DALI or push button

Cutout dimension (mm): 82




300 90 64 LED POWER SUPPLY MULTI-POWER DIM7

2(2)

Dimtype: 1-10V or push button

Cutout dimension (mm): 72













300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9

2

Dimtype: 1-10V or DALI or push button

SPY 27 CLIP 93030






24118 9320 FG-B

	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	2(2) ☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	2->6(6) ☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	3(2) ☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	2(2) ☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	3->4 ☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	2 ☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	3 ☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	3 ☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	4(4) ☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	3 ☐

DELTALIGHT

SPY 27 CLIP 93030



24118 9320 FG-B

	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8	2->2	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 50			
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	2	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 48			
	21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8	1	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 40			
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	2(2)	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 60			
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	2	☐
Dimtype: DALI			
Cutout dimension (mm): 30			

Light altering devices

	24144 0040 B VISOR 27 B	☐
--	--------------------------------	--------------------------


COMPATIBLE COMPOSABLES

ZOOVER 4CLIP	Available Colours
	28215 0005 ZOOVER 4CLIP 120 LIGHT GREY DIM5
	28216 0005 ZOOVER 4CLIP 120 DARK GREY DIM5


DELTALIGHT

SPY 27 CLIP 93030

24118 9320 FG-B



28217 0005 ZOOVER 4CLIP 140 LIGHT GREY DIMS



28218 0005 ZOOVER 4CLIP 140 DARK GREY DIMS



Notes: