




FRAX M 927 LINEAR H DIM5

26011 9245 N

AVAILABLE IN
ALU GREY 26011 9245 A
FLEMISH BRONZE OUTDOOR 26011 9245 FBRX
ANTHRACITE 26011 9245 N

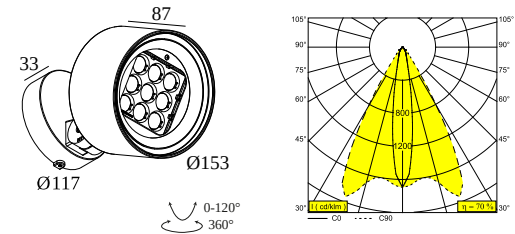

[View on website](#)



General info	
LOCATION	outdoor
INSTALLATION	Floor Surface mounted,Wall Surface mounted
INGRESS PROTECTION	IP65
PROTECTION AGAINST MECHANICAL IMPACT	IK08
WEIGHT (KG)	2.4
ADJUSTABILITY	0° to 120° swiveling, 360° rotatable
INFORMATION	9 x LENS SP-14° INCL.DIMMABLE LED POWER SUPPLY 900mA-DC INCL.LINEAR SPREAD LENS HORIZONTAL Oval spread 15°-60°

Electrical info	
ELECTRICAL	110-277V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	F
CERTIFICATES	EPD, RCM

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 23,4W / CRI>90 (R9: 50) / 2700K / 2423lm
TM-30 VALUES	Rf: 91 / Rg: 100
SDCM	SDCM3
RISKGROUP	RG2
LM80	L80 > 150000
BEAMANGLE	14°
LED TECHNICS (LIGHT SOURCE)	2423lm // 23,4W // 103lm/W
LED TECHNICS (LUMINAIRE)	1696lm // 26,9W // 63lm/W

Options	
FRAX ANTI VANDAL SCREWS	

Accessories	
FRAX M KAP	

DELTALIGHT

FRAX M 927 LINEAR H DIM5

26011 9245 N

For detailed installation instructions, please consult the manual : [26011_XX45_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Light altering devices



26070 0020 N FRAX M KAP N

☐

Other



26070 0030 FRAX ANTI VANDAL SCREWS 5 PCS

☐

Notes: