



DOT.COM

Our Dot.Com family is not only limited to spotlight beam angles, it also has linear wallwashers in its range for a soft, even light effect on vertical surfaces. These come as single luminaires, as modules to fit in the magnetic profiles and as a bespoke trimless or surface mounted profile solution, perfect to adapt the light to your specific desires.


www.deltalight.com/dotcom

How to build your DOT.COM

Example for Dot.Com ON

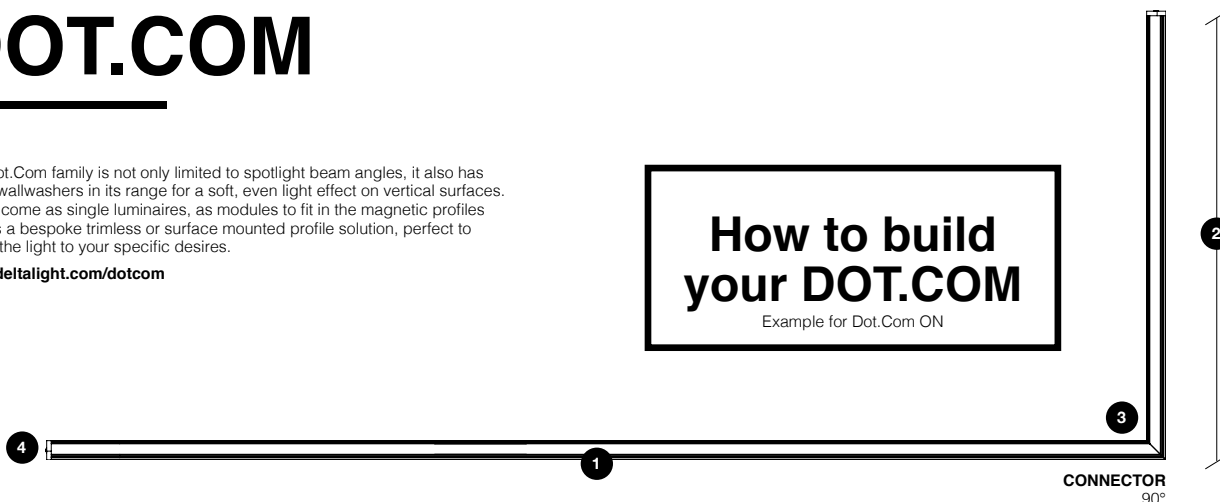

35 x (L + 5)



DOT.COM WALLWASH

1 PROFILE	TR	LEDLINE	ON
PROFILE / m	424 01 00 00 ◇	424 02 00 00 ◇	16312 0000 ◇
MAX. LENGTH PER PROFILE SECTION 6m	◇ B ●	◇ B ●	◇ B ● / W ○
POLYCARBONATE / m			
SANDBLASTED (SBL)	-	INCLUDED	INCLUDED

2 DIMENSIONS

The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.

3 JUNCTION / CORNER

CONNECTOR 180°	424 01 06 01	-	16312 0620
CONNECTOR 90°	424 01 06 06	-	16312 0630

4 ENDCAP

ENDCAP (2 PCS.)	424 01 03 01 B	424 02 03 01 B	16312 0310 B / W
-----------------	----------------	----------------	------------------

5 FIXATION

SURFACE MOUNTED			
INSIDE CLIP (2 PCS.)	-	-	391 06 11
SUSPENDED			
SUSPENSION SINGLE 1,6M (1 PC.)	-	-	391 09 01
SUSPENSION ST	-	-	15225 0340 B / W



6 CONNECTION

POWERBOX			
NON DIM 24V-DC / 60W	-	-	300 24 060 B / W
1-10V DIM 24V-DC / 60W	-	-	300 24 060 ED1 B / W
DALI 24V-DC / 150W	-	-	300 24 150 ED5 B / W
SUSPENDED			
CURRENT SUPPLY 1,6M	2X0,75MM²	-	391 97 51
CONNECTION ST	-	-	15225 0360 B / W
CABLE BASE R	-	-	203 99 55 ANO / B / W
CABLE BASE S	-	-	203 99 56 ANO / B / W
COVERSET R	100MM	-	204 00 100 B / W

LIGHT MODULES

7 LED FLEX

SEE PAGE 437

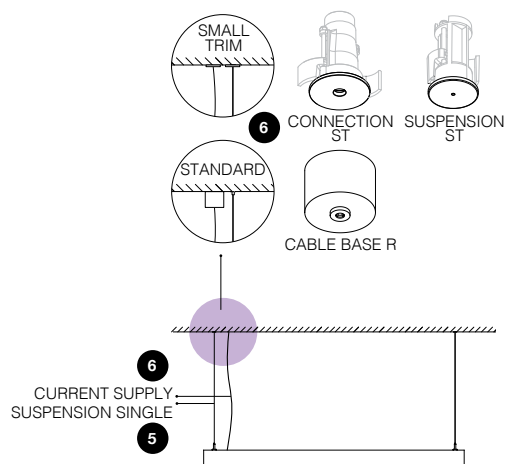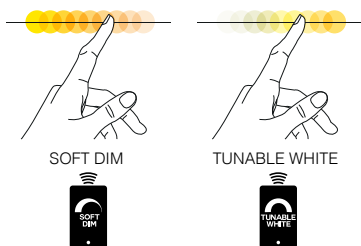

PRO

PROFILES

